

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	499.1 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	7.0 degrees horizontal

Beam Spread	At 10% of Imax	105.5V x 105.8H
	At 50% of Imax	93.6V x 93.6H
	At 90% of Imax	70.4V x 72.3H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	939.4 lumens per klm.
	To 50% of Imax	866.5 lumens per klm.
	To 90% of Imax	560.1 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-05-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:218.84V I:0.1331A P:28.633W PF:0.9827 Freq:49.99Hz Lamp Flux:3617.26x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

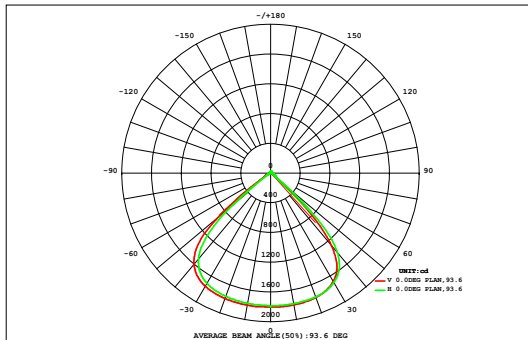

DATA OF LAMP		Eff:126.33lm/W	
MODEL		Imax (cd)	1806
NOMINAL POWER (W)	30W	AVAILABILITY (%)	93.9
RATED VOLTAGE (V)		Avai. FLUX (lm)	3396
NOMINAL FLUX (lm)	3617.26	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	3617
TEST VOLTAGE (V)	0	θ @50% (H,V)	94,94DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.04	0.07	0.10	0.13	0.16	0.19	0.22	0.25	0.25	0.25	0.23	0.20	0.17	0.15	0.12	0.07	0.03	2.66	0.00
90	0.01	0.04	0.08	0.14	0.23	0.33	0.44	0.54	0.62	0.64	0.61	0.54	0.43	0.33	0.25	0.17	0.09	0.03	5.54	0.00
80	0.01	0.05	0.12	0.24	0.41	0.63	0.88	1.12	1.30	1.38	1.33	1.16	0.90	0.63	0.41	0.24	0.11	0.03	11.0	0.00
70	0.01	0.06	0.17	0.38	0.68	1.12	1.79	3.31	5.66	6.78	5.61	3.27	1.79	1.13	0.67	0.34	0.14	0.03	33.0	14.8
60	0.01	0.07	0.24	0.54	1.07	2.56	11.3	24.8	33.6	35.8	32.0	22.7	9.71	2.19	0.99	0.47	0.18	0.04	178	169
50	0.02	0.09	0.30	0.72	1.96	13.4	33.3	44.3	48.9	49.4	46.7	40.5	28.0	8.50	1.41	0.60	0.21	0.04	318	312
40	0.02	0.10	0.35	0.91	6.15	28.4	43.4	50.1	52.7	52.8	50.5	45.9	37.2	19.1	2.55	0.72	0.24	0.04	391	386
30	0.02	0.11	0.39	1.11	12.1	35.6	46.8	51.8	53.8	53.6	51.7	47.8	40.7	25.9	4.74	0.83	0.26	0.04	427	423
20	0.02	0.12	0.41	1.26	15.4	38.0	47.9	52.5	54.2	54.0	52.5	48.8	42.0	28.8	6.36	0.89	0.28	0.05	444	440
10	0.02	0.12	0.42	1.25	14.9	37.8	47.8	52.4	54.1	54.3	52.8	49.0	42.1	28.5	6.16	0.89	0.28	0.05	443	439
0	0.02	0.12	0.41	1.13	10.8	34.5	46.4	51.6	53.8	54.0	52.3	48.2	40.5	25.0	4.30	0.83	0.27	0.04	424	420
-10	0.02	0.11	0.38	0.97	4.87	25.4	42.0	49.5	52.7	53.0	50.9	46.0	36.3	16.9	2.26	0.74	0.25	0.04	382	377
-20	0.02	0.10	0.33	0.80	1.83	9.65	28.5	41.7	47.2	48.2	45.5	38.6	24.4	6.38	1.39	0.62	0.22	0.04	295	288
-30	0.02	0.08	0.27	0.63	1.22	2.27	7.09	17.4	25.6	28.1	25.1	16.6	6.26	1.92	1.03	0.50	0.19	0.04	134	122
-40	0.02	0.07	0.20	0.46	0.85	1.33	1.86	2.49	3.26	3.88	3.59	2.48	1.76	1.21	0.74	0.38	0.16	0.03	24.8	3.72
-50	0.02	0.06	0.15	0.31	0.53	0.80	1.07	1.29	1.44	1.49	1.45	1.29	1.04	0.76	0.50	0.28	0.13	0.03	12.6	0.00
-60	0.02	0.05	0.11	0.19	0.31	0.43	0.55	0.65	0.72	0.75	0.73	0.67	0.58	0.46	0.32	0.20	0.10	0.03	6.87	0.00
-70	0.02	0.05	0.10	0.15	0.20	0.25	0.28	0.31	0.33	0.35	0.35	0.34	0.31	0.27	0.21	0.15	0.09	0.03	3.77	0.00
-80	0.02	0.05	0.10	0.15	0.20	0.25	0.28	0.31	0.33	0.35	0.35	0.34	0.31	0.27	0.21	0.15	0.09	0.03	3.77	0.00
-90	0.02	0.05	0.10	0.15	0.20	0.25	0.28	0.31	0.33	0.35	0.35	0.34	0.31	0.27	0.21	0.15	0.09	0.03	3.77	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.28	1.44	4.51	11.3	73.7	233	362	446	490	499	474	414	314	168	34.4	8.98	3.26	0.66	3539	---
Φ a	0.00	0.00	0.00	0.00	61.1	222	352	437	481	490	465	405	305	158	19.7	0.00	0.00	0.00	---	3396

one-half-peak spread: U:38.4,D:44.3 , L:38.7,R:43.1


NEMA Beam Type: Type 6

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-05-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.84V I:0.1331A P:28.633W PF:0.9827 Freq:49.99Hz Lamp Flux:3617.26x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

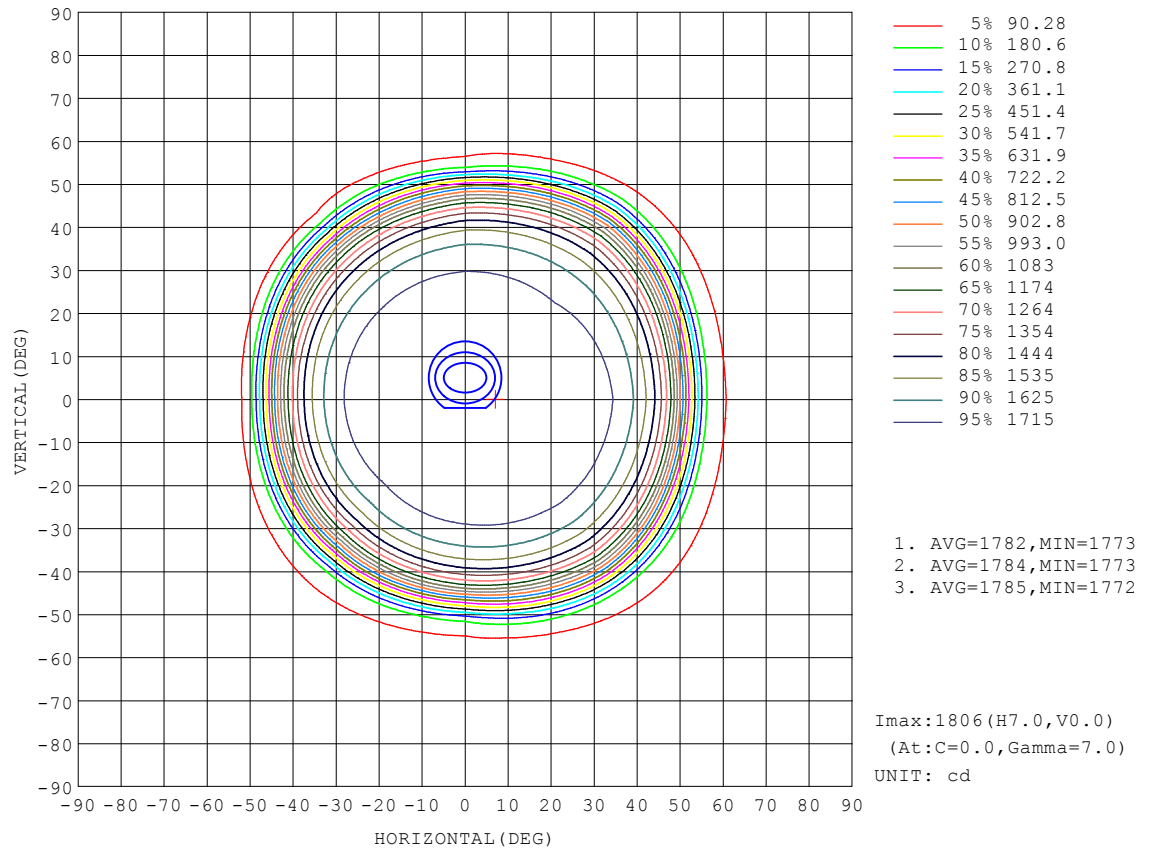


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-05-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:218.84V I:0.1331A P:28.633W PF:0.9827 Freq:49.99Hz Lamp Flux:3617.26x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

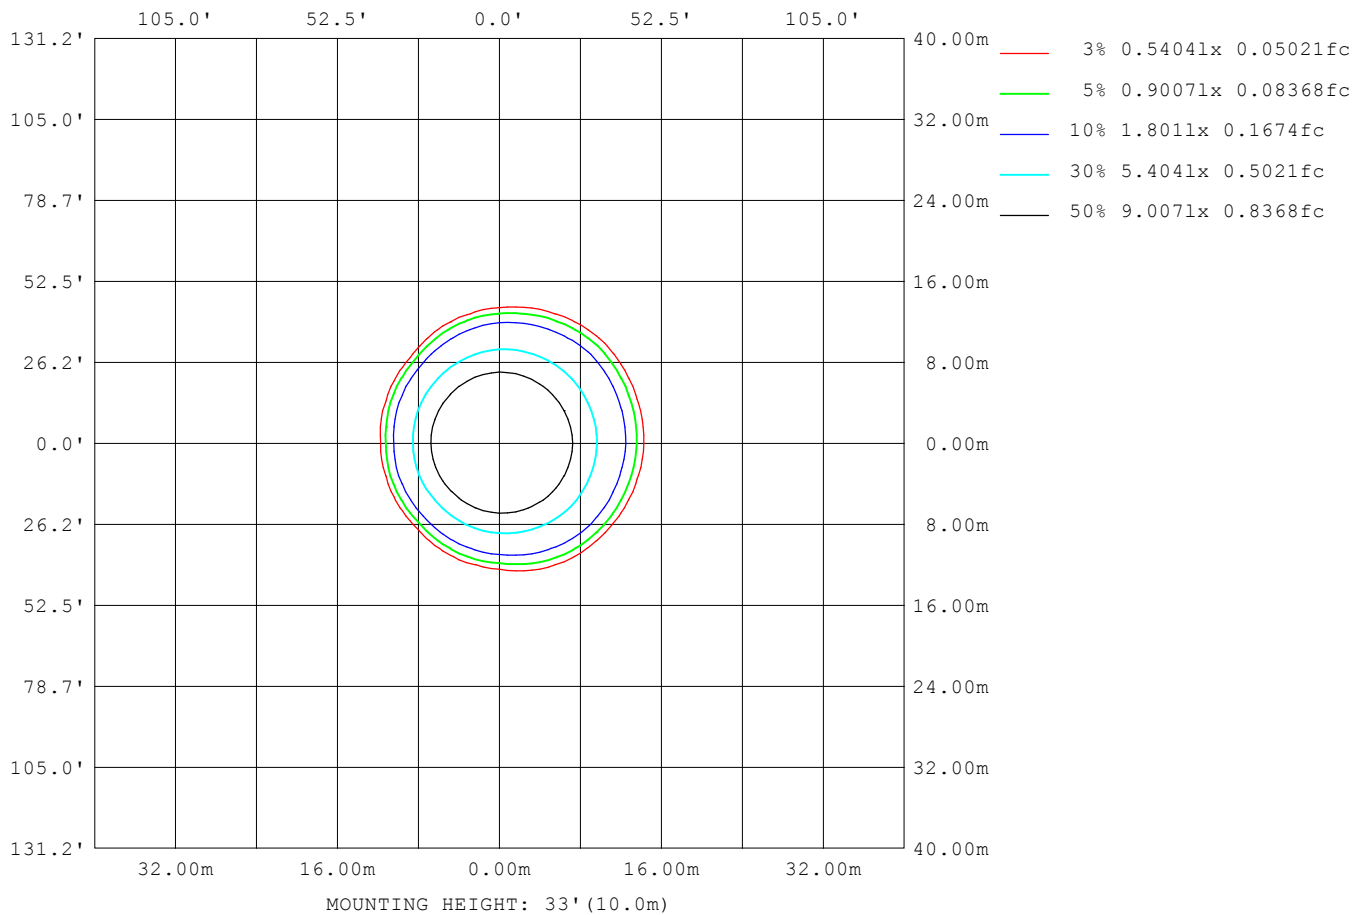

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-05-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

Planar Illuminance Curve

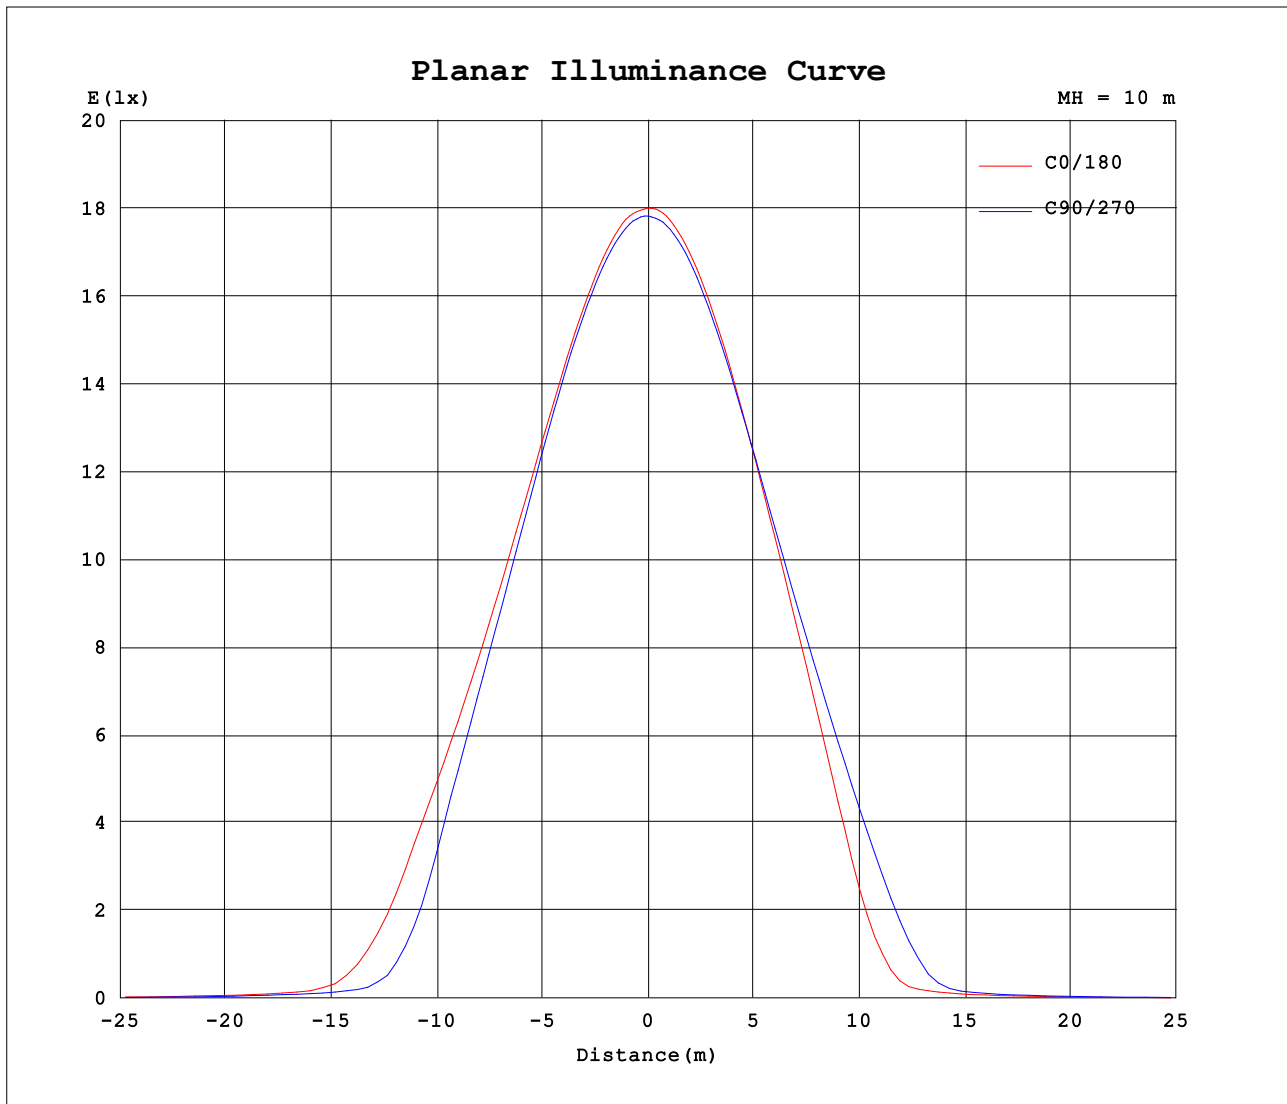


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-05-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.84V I:0.1331A P:28.633W PF:0.9827 Freq:49.99Hz Lamp Flux:3617.26x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

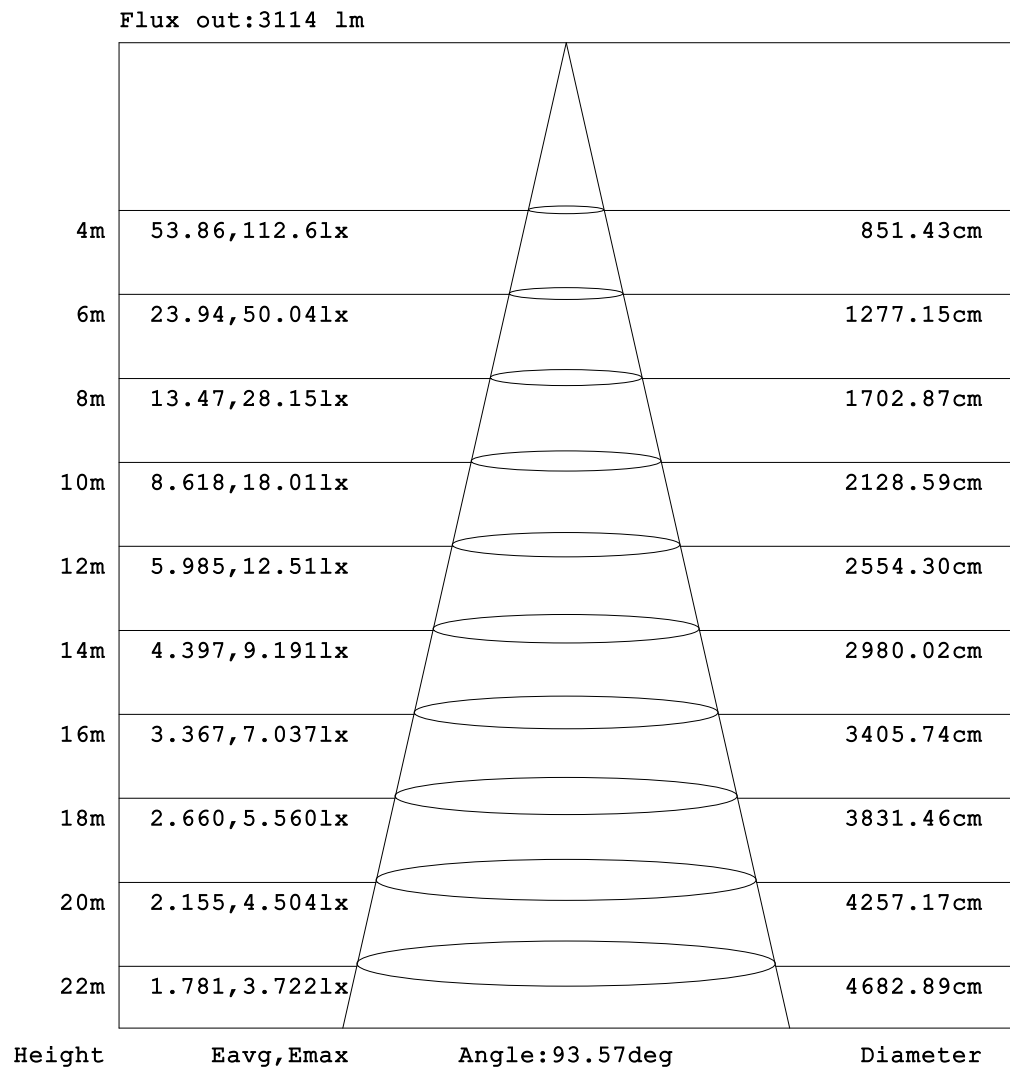

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-05-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.250m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.84V I:0.1331A P:28.633W PF:0.9827 Freq:49.99Hz Lamp Flux:3617.26x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	5.85	6.65	7.62	8.67	9.76	10.8	12.0	13.9	15.8	17.5	18.8	19.9	21.2	22.9	24.7	25.8	26.3	26.6	26.4
-170	5.85	6.66	7.61	8.62	9.67	10.7	11.8	13.4	15.2	16.9	18.1	19.2	20.3	21.5	22.7	23.5	23.9	24.3	24.3
-160	5.85	6.65	7.53	8.47	9.44	10.4	11.4	12.7	14.2	15.7	17.0	18.0	18.8	19.6	20.3	20.8	21.2	21.5	21.5
-150	5.85	6.61	7.41	8.26	9.11	9.96	10.8	11.7	12.9	14.1	15.2	16.2	17.0	17.6	18.2	18.4	18.4	18.1	17.6
-140	5.85	6.56	7.26	7.98	8.69	9.41	10.1	10.8	11.5	12.4	13.2	13.9	14.6	15.3	15.9	16.3	16.5	16.6	16.5
-130	5.85	6.49	7.07	7.66	8.23	8.80	9.34	9.86	10.4	10.9	11.4	11.9	12.3	12.7	13.0	13.2	13.4	13.4	13.4
-120	5.85	6.40	6.88	7.34	7.76	8.17	8.55	8.93	9.27	9.58	9.87	10.1	10.4	10.6	10.7	10.9	10.9	10.9	10.9
-110	5.85	6.31	6.71	7.04	7.34	7.62	7.87	8.10	8.31	8.49	8.63	8.75	8.85	8.93	9.00	9.04	9.05	9.03	8.99
-100	5.85	6.23	6.55	6.83	7.07	7.27	7.44	7.59	7.73	7.85	7.88	7.89	7.90	7.89	7.89	7.89	7.87	7.85	7.83
-90	5.85	6.15	6.44	6.73	7.03	7.32	7.61	7.91	8.20	8.49	8.54	8.59	8.64	8.68	8.73	8.78	8.83	8.88	8.92
-80	5.85	6.06	6.35	6.72	7.17	7.69	8.33	9.11	9.99	11.0	11.5	12.1	12.7	13.3	13.8	14.3	14.7	15.0	15.2
-70	5.85	5.98	6.31	6.85	7.81	9.29	11.3	13.8	16.2	18.7	21.2	23.5	25.7	27.9	29.9	31.7	33.1	34.1	34.8
-60	5.85	5.91	6.31	7.45	9.81	13.3	17.0	21.3	26.2	31.4	36.9	41.7	46.4	50.8	54.8	58.3	61.2	63.1	64.2
-50	5.85	5.85	6.44	8.77	13.0	17.9	24.0	30.8	38.5	47.0	56.5	66.4	76.4	89.1	108	151	206	269	307
-40	5.85	5.77	6.75	10.7	16.0	23.0	30.9	40.3	51.5	65.7	84.6	118	286	597	910	1136	1277	1357	1400
-30	5.85	5.71	7.16	12.1	18.9	27.1	37.0	49.1	66.4	96.7	277	714	1126	1377	1527	1613	1662	1689	1703
-20	5.85	5.63	7.52	13.1	21.1	30.0	41.4	57.3	86.5	290	839	1287	1520	1640	1702	1738	1758	1769	1774
-10	5.85	5.55	7.67	13.7	22.0	31.3	43.5	62.6	120	587	1180	1498	1651	1724	1760	1775	1778	1780	1784
0	5.85	5.47	7.56	13.7	21.8	30.9	42.8	62.7	149	713	1276	1556	1686	1750	1781	1794	1799	1803	1801
10	5.85	5.48	7.52	13.5	21.4	30.4	42.3	61.5	135	640	1218	1519	1662	1731	1764	1779	1785	1784	1780
20	5.85	5.49	7.23	12.5	20.0	28.2	39.1	54.9	86.1	370	951	1353	1560	1665	1719	1748	1760	1765	1764
30	5.85	5.50	6.76	11.3	17.6	24.8	33.6	45.2	62.6	102	407	903	1265	1470	1585	1650	1685	1704	1713
40	5.85	5.51	6.23	9.81	14.5	20.5	27.1	35.3	45.7	60.0	79.3	172	489	856	1138	1309	1413	1475	1511
50	5.85	5.54	5.81	7.81	11.4	15.6	20.5	25.8	31.9	39.1	47.8	58.6	72.6	102	174	314	462	585	665
60	5.85	5.57	5.59	6.39	8.34	11.2	14.1	17.3	20.8	24.5	28.6	33.4	38.5	43.6	48.6	53.2	57.1	60.2	62.3
70	5.85	5.63	5.55	5.69	6.25	7.41	8.91	10.7	12.4	14.2	16.1	18.2	20.4	22.4	24.4	26.2	27.7	29.0	29.9
80	5.85	5.72	5.61	5.56	5.58	5.68	5.90	6.25	6.73	7.30	8.08	8.86	9.65	10.4	11.1	11.8	12.4	12.9	13.4
90	5.85	5.83	5.81	5.80	5.78	5.76	5.74	5.72	5.70	5.68	5.64	5.60	5.57	5.53	5.50	5.46	5.42	5.39	5.35
100	5.85	5.95	6.04	6.13	6.23	6.32	6.40	6.48	6.56	6.63	6.68	6.71	6.72	6.73	6.72	6.70	6.66	6.62	6.55
110	5.85	6.07	6.31	6.55	6.80	7.06	7.30	7.54	7.77	7.97	8.12	8.27	8.38	8.47	8.52	8.55	8.54	8.50	8.43
120	5.85	6.20	6.57	6.99	7.41	7.84	8.25	8.65	9.02	9.36	9.66	9.92	10.1	10.3	10.4	10.5	10.6	10.5	10.5
130	5.85	6.32	6.85	7.42	8.01	8.60	9.17	9.72	10.2	10.7	11.2	11.7	12.1	12.6	12.9	13.1	13.2	13.2	13.1
140	5.85	6.43	7.09	7.81	8.55	9.30	10.0	10.7	11.4	12.3	13.2	14.1	14.8	15.4	15.9	16.2	16.4	16.5	16.4
150	5.85	6.52	7.30	8.15	9.02	9.89	10.7	11.6	12.8	14.2	15.3	16.3	17.1	17.7	18.2	18.6	18.9	18.9	18.8
160	5.85	6.59	7.46	8.41	9.39	10.4	11.3	12.6	14.3	15.8	17.0	18.0	18.8	19.7	20.5	21.3	22.0	22.2	22.0
170	5.85	6.63	7.57	8.59	9.65	10.7	11.8	13.4	15.3	16.9	18.1	19.2	20.3	21.6	23.1	24.3	24.7	24.9	24.8
180	5.85	6.65	7.62	8.67	9.76	10.8	12.0	13.9	15.8	17.5	18.8	19.9	21.2	22.9	24.7	25.8	26.3	26.6	26.3

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-05-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.84V I:0.1331A P:28.633W PF:0.9827 Freq:49.99Hz Lamp Flux:3617.26x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: EVERFINE									SUR.:						Shielding Angle:		

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	25.5	24.3	23.1	21.3	18.5	17.6	17.5	16.1	14.2	12.7	11.4	10.3	9.35	8.55	8.02	8.09	9.05	10.5	
-170	23.8	23.0	22.0	20.5	18.6	17.8	17.2	15.6	13.9	12.5	11.3	10.2	9.29	8.52	8.01	8.11	9.06	10.5	
-160	21.2	20.6	19.9	19.1	18.1	17.3	16.0	14.5	13.1	12.0	10.9	9.95	9.10	8.41	7.97	8.16	9.11	10.5	
-150	17.8	17.9	17.7	17.2	16.4	15.4	14.2	13.1	12.1	11.2	10.3	9.51	8.81	8.25	7.95	8.26	9.19	10.5	
-140	16.3	16.0	15.5	14.8	14.0	13.2	12.4	11.7	11.0	10.3	9.60	9.00	8.47	8.07	7.97	8.42	9.31	10.5	
-130	13.2	13.0	12.6	12.2	11.8	11.3	10.8	10.3	9.79	9.33	8.89	8.48	8.14	7.95	8.11	8.67	9.45	10.5	
-120	10.8	10.7	10.5	10.2	9.96	9.68	9.38	9.08	8.80	8.52	8.27	8.06	7.95	8.05	8.42	8.98	9.63	10.5	
-110	8.95	8.88	8.79	8.69	8.57	8.44	8.31	8.18	8.05	7.97	7.95	8.02	8.21	8.51	8.90	9.35	9.86	10.5	
-100	7.84	7.86	7.87	7.89	7.92	7.97	8.04	8.14	8.26	8.40	8.58	8.78	8.99	9.24	9.50	9.79	10.1	10.5	
-90	9.03	9.14	9.25	9.35	9.46	9.57	9.67	9.78	9.89	9.96	10.0	10.1	10.2	10.2	10.3	10.4	10.5	10.5	
-80	15.7	16.1	16.4	16.6	16.6	16.6	16.5	16.3	15.9	15.3	14.5	13.8	13.0	12.3	11.7	11.2	10.8	10.5	
-70	35.4	35.7	35.5	34.9	33.9	32.6	31.1	29.2	27.3	25.2	23.0	20.8	18.5	16.2	14.2	12.5	11.3	10.5	
-60	65.9	66.6	66.1	64.4	61.6	58.1	54.1	49.5	44.5	39.5	34.7	29.9	25.5	21.4	17.5	14.2	11.8	10.5	
-50	347	345	314	250	166	106	90.6	79.4	68.5	58.9	49.6	41.2	33.7	27.0	21.2	16.1	12.4	10.5	
-40	1410	1394	1346	1259	1114	897	565	245	112	83.5	67.6	54.2	42.7	32.9	24.9	18.0	13.0	10.5	
-30	1705	1699	1681	1649	1595	1496	1318	984	493	147	87.9	67.9	51.5	38.7	28.2	19.9	13.5	10.5	
-20	1775	1773	1768	1756	1727	1675	1580	1405	1042	464	126	79.7	59.8	43.6	31.0	21.3	14.0	10.5	
-10	1788	1791	1790	1783	1770	1739	1675	1555	1311	770	209	90.0	65.8	47.0	32.9	22.3	14.2	10.5	
0	1804	1804	1801	1795	1783	1759	1706	1604	1397	903	277	95.4	68.7	48.6	33.7	22.6	14.3	10.5	
10	1775	1768	1772	1769	1758	1732	1675	1564	1336	816	226	90.1	65.4	46.5	32.5	22.0	14.1	10.5	
20	1762	1755	1745	1732	1713	1671	1593	1440	1120	541	137	79.3	58.8	42.6	30.2	20.9	13.8	10.5	
30	1710	1700	1683	1654	1609	1530	1387	1113	633	189	88.5	66.8	49.9	37.2	27.0	19.3	13.3	10.5	
40	1511	1493	1453	1385	1275	1099	803	399	145	83.9	66.2	51.8	40.3	30.8	23.4	17.3	12.7	10.5	
50	681	649	569	440	304	176	101	80.1	66.9	55.9	46.1	37.9	30.6	24.6	19.8	15.2	12.0	10.5	
60	64.3	65.1	64.3	62.2	59.2	55.0	49.8	44.3	39.2	34.5	29.9	25.7	22.1	19.1	16.0	13.3	11.4	10.5	
70	30.5	30.6	30.3	29.6	28.4	26.8	24.8	22.5	20.5	19.3	18.2	17.0	15.7	14.1	12.7	11.6	10.8	10.5	
80	13.4	13.3	13.2	13.0	12.7	12.3	11.9	11.4	10.9	11.0	10.9	10.7	10.6	10.4	10.3	10.3	10.4	10.5	
90	5.39	5.43	5.47	5.51	5.55	5.59	5.63	5.67	5.71	6.24	6.78	7.32	7.85	8.39	8.92	9.46	10.00	10.5	
100	6.50	6.44	6.37	6.28	6.19	6.08	5.97	5.85	5.76	6.02	6.34	6.72	7.15	7.65	8.23	8.90	9.68	10.5	
110	8.37	8.28	8.15	8.00	7.82	7.61	7.38	7.13	6.93	6.84	6.81	6.87	7.06	7.41	7.93	8.59	9.43	10.5	
120	10.4	10.3	10.1	9.89	9.63	9.31	8.94	8.55	8.22	7.91	7.62	7.39	7.27	7.35	7.72	8.37	9.26	10.5	
130	13.0	12.7	12.4	11.9	11.5	11.0	10.5	10.0	9.55	9.02	8.52	8.07	7.69	7.49	7.62	8.20	9.14	10.5	
140	16.3	15.9	15.5	14.8	14.0	13.1	12.2	11.4	10.8	10.1	9.41	8.76	8.19	7.76	7.64	8.09	9.06	10.5	
150	18.7	18.3	17.8	17.2	16.4	15.5	14.3	13.1	12.0	11.0	10.2	9.38	8.64	8.05	7.73	8.03	9.01	10.5	
160	21.6	20.9	20.0	19.1	18.0	17.2	16.1	14.6	13.1	11.9	10.8	9.88	9.00	8.29	7.84	8.01	8.99	10.5	
170	24.4	23.5	22.2	20.4	18.5	17.8	17.2	15.7	13.9	12.5	11.2	10.2	9.25	8.47	7.94	8.03	9.00	10.5	
180	25.5	24.3	23.1	21.3	18.5	17.6	17.5	16.1	14.2	12.7	11.4	10.3	9.35	8.55	8.02	8.09	9.05	10.5	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-05-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks: