

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	355.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	150.5V x 150.3H
	At 50% of Imax	113.4V x 114.5H
	At 90% of Imax	44.9V x 52.8H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	959.8 lumens per klm.
	To 50% of Imax	769.2 lumens per klm.
	To 90% of Imax	187.1 lumens per klm.

Upward LOR	2.4 %
Downward LOR	97.6 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-11-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:218.5V I:0.4234A P:90.17W PF:0.985 Freq:50.47Hz Lamp Flux:9054.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

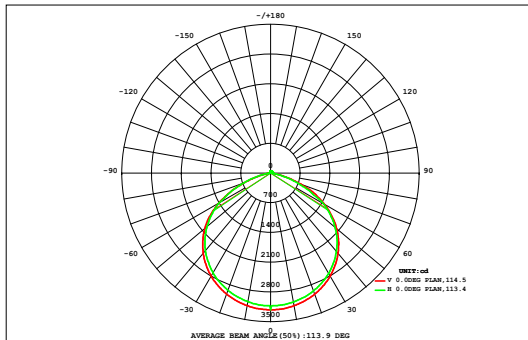

DATA OF LAMP		Eff:100.41lm/W	
MODEL		Imax(cd)	3219
NOMINAL POWER(W)	100	AVAILABILITY(%)	96.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	8689
NOMINAL FLUX(lm)	9054.5	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	9054
TEST VOLTAGE(V)	220	θ @50% (H,V)	114,113DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.03	0.11	0.19	0.28	0.39	0.51	0.65	0.78	0.86	0.90	0.89	0.83	0.74	0.66	0.56	0.44	0.29	0.10	9.21	0.00
90	0.03	0.11	0.19	0.28	0.39	0.51	0.65	0.78	0.86	0.90	0.89	0.83	0.74	0.66	0.56	0.44	0.29	0.10	9.21	0.00
80	0.04	0.15	0.40	1.26	2.99	5.32	7.71	9.61	10.6	10.5	9.28	7.27	4.90	2.76	1.31	0.59	0.31	0.11	75.1	39.8
70	0.04	0.26	1.66	5.42	11.1	17.7	23.9	28.3	30.6	30.4	27.8	23.0	16.7	10.2	4.69	1.50	0.39	0.11	234	223
60	0.05	0.62	4.11	11.5	21.5	31.8	40.9	47.6	50.9	50.8	47.3	40.4	30.9	20.3	10.4	3.46	0.64	0.11	413	408
50	0.06	1.23	6.98	17.8	30.7	43.4	54.2	62.0	65.9	65.9	61.9	54.1	43.1	29.9	16.5	6.09	1.06	0.12	561	558
40	0.07	1.92	9.78	23.0	37.8	52.2	64.5	73.1	77.4	77.4	73.1	64.4	52.1	37.4	21.9	8.73	1.58	0.13	676	674
30	0.09	2.55	12.1	26.8	43.0	58.8	72.0	81.3	85.8	85.8	81.3	71.9	58.7	42.9	26.0	11.0	2.10	0.14	762	760
	0.10	3.02	13.7	29.3	46.5	63.1	77.1	87.0	91.5	91.5	86.9	77.1	63.1	46.4	28.7	12.5	2.49	0.15	820	819
	0.11	3.28	14.5	30.6	48.4	65.5	80.1	90.4	95.2	95.2	90.4	80.0	65.4	48.3	30.1	13.3	2.71	0.16	854	852
	0.11	3.28	14.5	30.6	48.4	65.6	80.1	90.5	95.2	95.2	90.4	80.0	65.5	48.3	30.1	13.3	2.71	0.16	854	853
	0.10	3.01	13.7	29.4	46.7	63.3	77.3	87.2	91.8	91.8	87.2	77.3	63.2	46.5	28.8	12.5	2.49	0.15	822	821
	0.09	2.54	12.1	26.9	43.2	59.0	72.2	81.7	86.2	86.2	81.6	72.2	58.9	43.0	26.1	11.0	2.10	0.14	765	763
-30	0.07	1.92	9.78	23.1	38.1	52.6	64.9	73.6	78.0	78.0	73.6	64.8	52.4	37.7	22.1	8.73	1.58	0.13	681	678
-40	0.06	1.24	6.96	17.8	31.0	43.8	54.8	62.7	66.7	66.7	62.6	54.7	43.5	30.2	16.6	6.07	1.06	0.12	567	563
-50	0.06	0.64	4.10	11.4	21.5	32.2	41.5	48.3	51.8	51.7	48.1	41.0	31.3	20.3	10.3	3.44	0.66	0.12	419	413
-60	0.05	0.30	1.69	5.40	11.1	17.7	23.9	28.6	31.0	30.8	28.0	23.1	16.7	10.1	4.67	1.53	0.43	0.11	235	224
-70	0.04	0.19	0.50	1.39	3.10	5.36	7.69	9.52	10.5	10.4	9.20	7.25	4.95	2.87	1.44	0.69	0.35	0.11	75.5	39.1
-80	0.04	0.15	0.30	0.49	0.71	0.96	1.22	1.47	1.65	1.69	1.58	1.40	1.19	0.98	0.76	0.55	0.33	0.11	15.6	0.00
-90	0.04	0.15	0.30	0.49	0.71	0.96	1.22	1.47	1.65	1.69	1.58	1.40	1.19	0.98	0.76	0.55	0.33	0.11	15.6	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
Φ t	1.24	26.4	127	292	486	679	845	964	1021	1021	961	841	673	479	281	116	23.3	2.28	8839	---
Φ a	0.00	15.8	119	284	478	671	836	956	1013	1012	953	832	664	469	272	105	10.4	0.00	---	8689

one-half-peak spread: U:57.2,D:56.7 , L:57.9,R:57.1


NEMA Beam Type: Type 7

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-11-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.5V I:0.4234A P:90.17W PF:0.985 Freq:50.47Hz Lamp Flux:9054.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

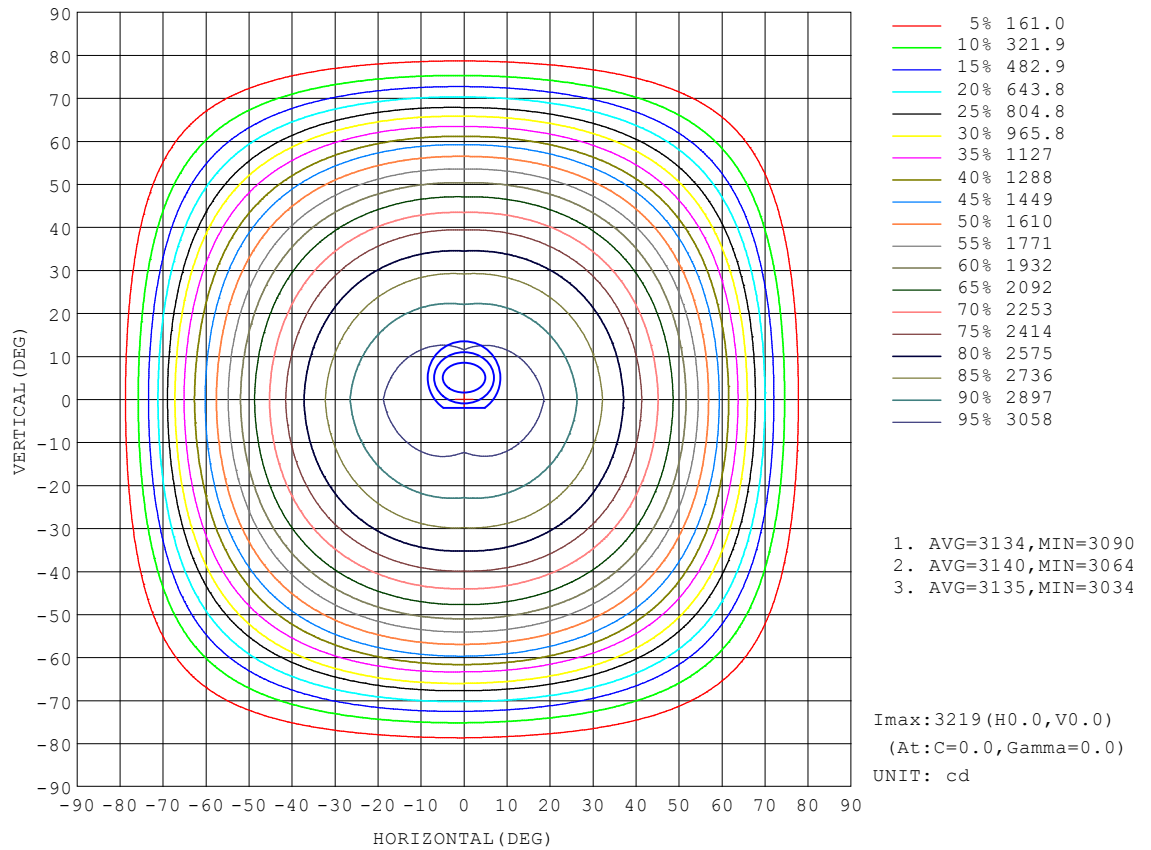


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-11-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:218.5V I:0.4234A P:90.17W PF:0.985 Freq:50.47Hz Lamp Flux:9054.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

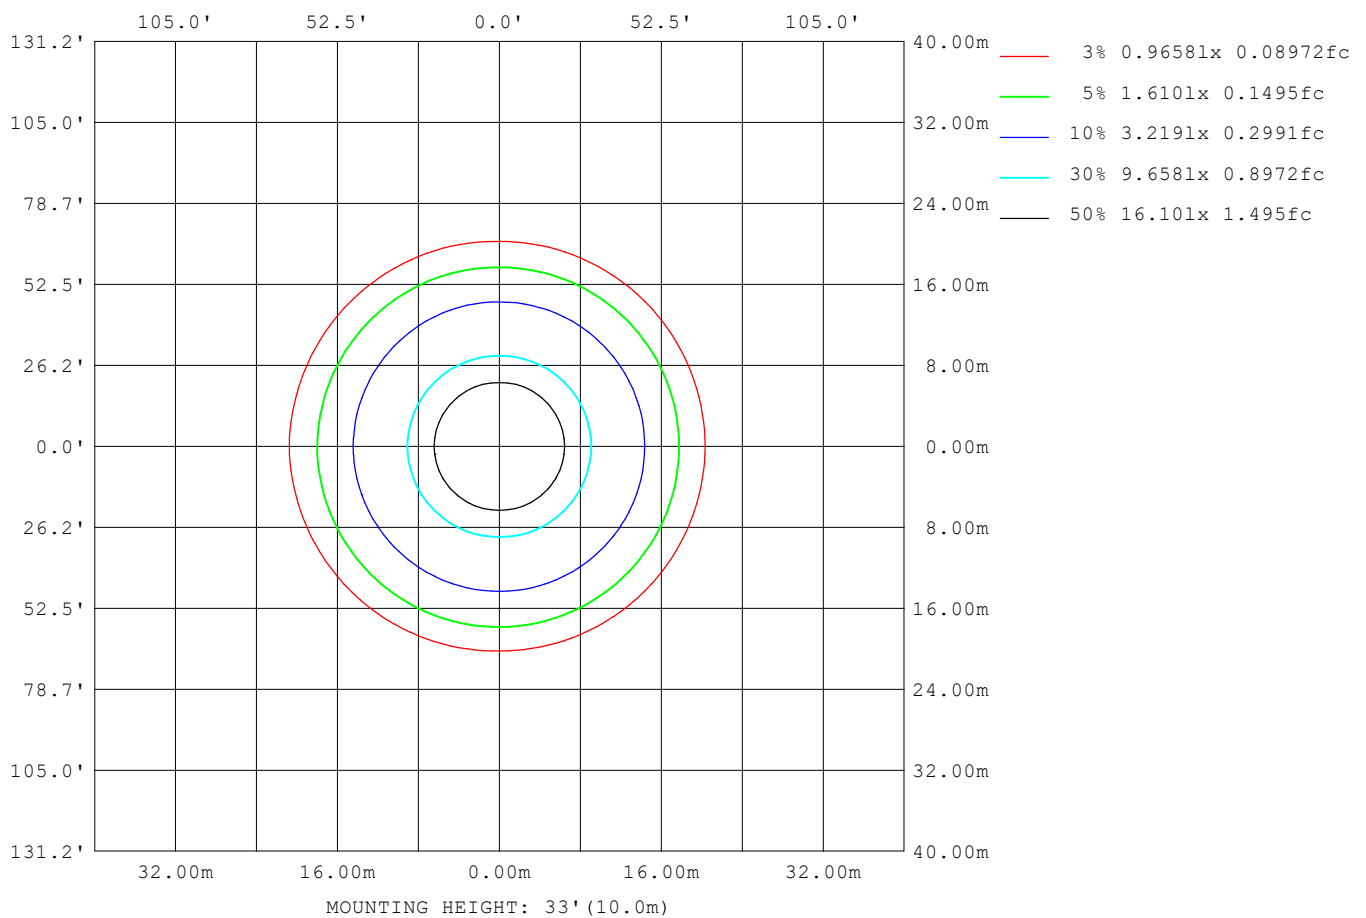

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-11-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks:

Planar Illuminance Curve

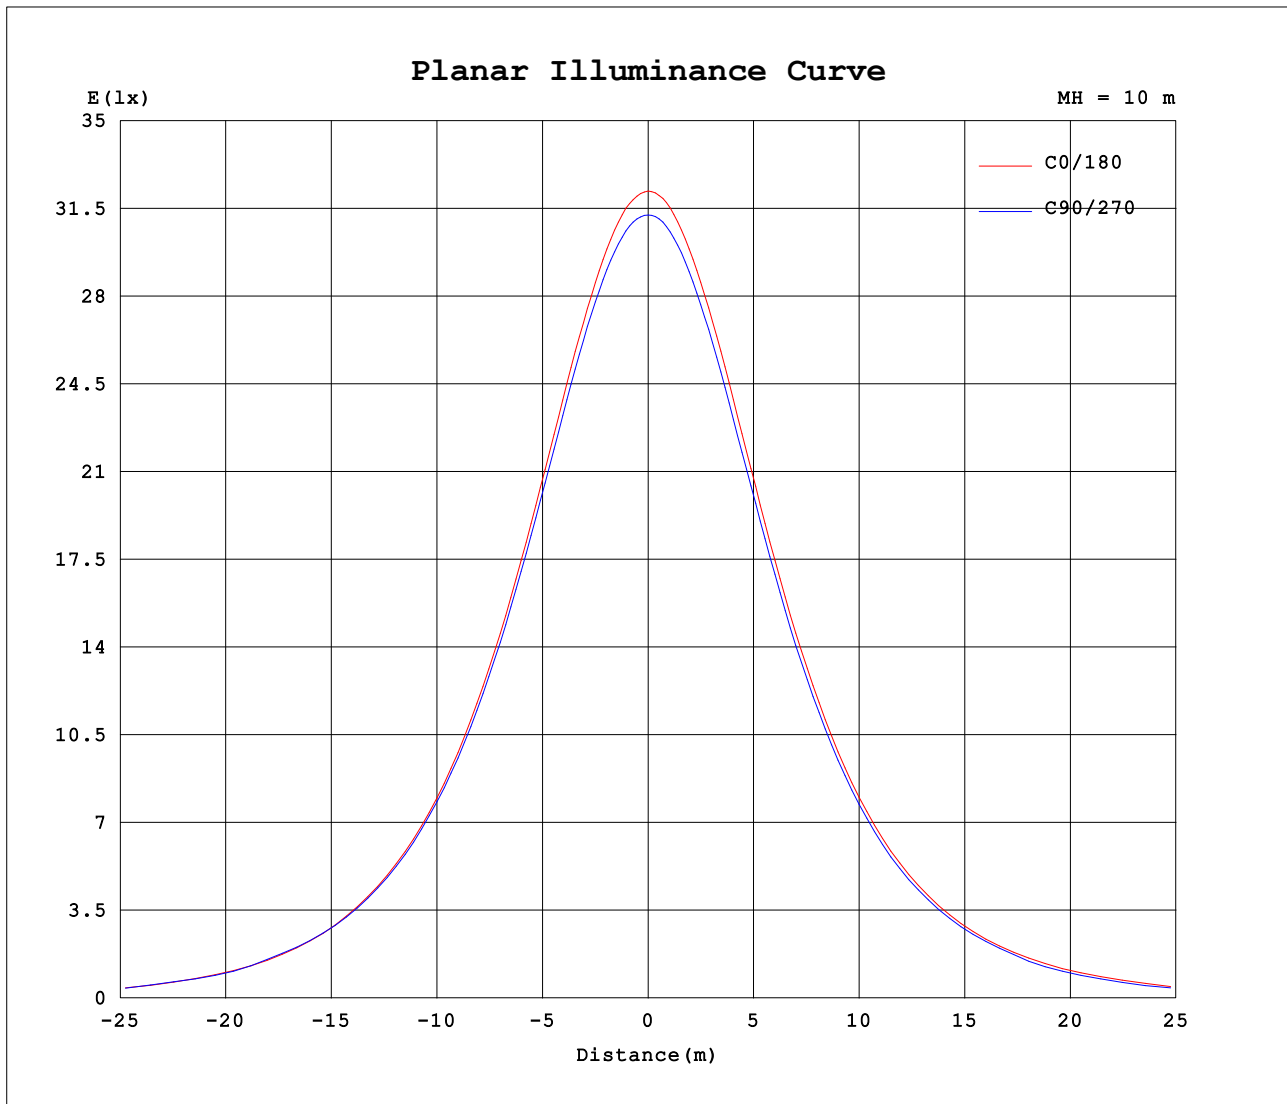


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-11-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.5V I:0.4234A P:90.17W PF:0.985 Freq:50.47Hz Lamp Flux:9054.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

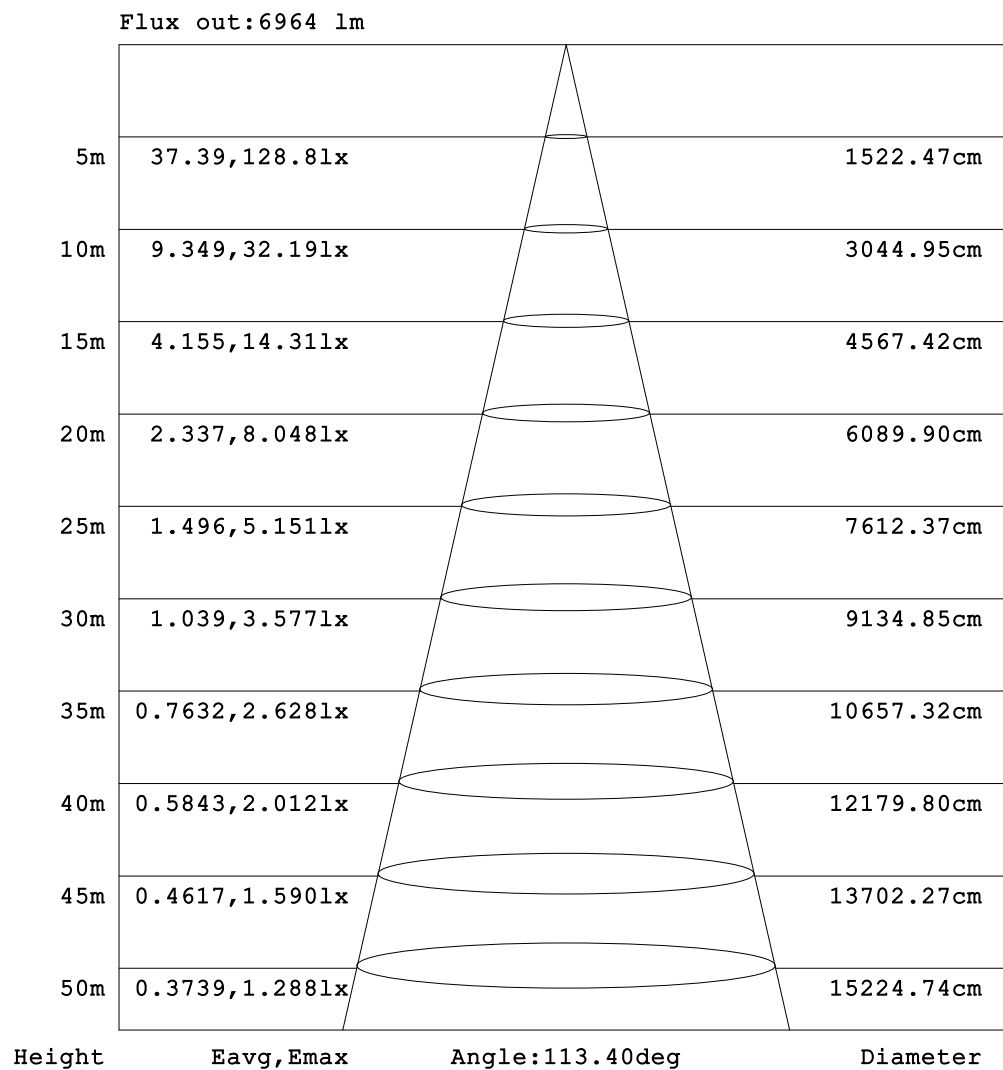

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:2025-11-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.200m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.5V I:0.4234A P:90.17W PF:0.985 Freq:50.47Hz Lamp Flux:9054.5x1 lm									
NAME:					TYPE:				
SPEC.:					DIM.:				
MFR.: EVERFINE					SUR.:				
					Shielding Angle:				

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	12.3	12.3	14.5	16.9	19.4	22.0	24.4	26.8	29.0	31.3	33.7	36.3	39.0	41.9	44.9	47.6	50.1	52.2	53.7
-170	12.3	12.6	15.0	17.5	20.1	22.8	25.3	27.8	30.1	32.4	34.7	37.3	39.9	42.6	45.3	47.8	49.8	51.2	52.0
-160	12.3	12.7	15.2	17.9	20.5	23.2	25.7	28.2	30.5	32.7	34.9	37.2	39.6	41.8	44.1	46.1	47.9	49.3	50.3
-150	12.3	12.8	15.4	18.0	20.6	23.2	25.7	28.1	30.4	32.5	34.5	36.5	38.5	40.4	42.3	44.0	45.5	46.8	47.9
-140	12.3	12.8	15.3	17.9	20.4	22.9	25.3	27.6	29.8	31.8	33.7	35.5	37.2	38.8	40.4	41.8	43.2	44.4	45.5
-130	12.3	12.8	15.2	17.6	20.0	22.3	24.6	26.7	28.8	30.7	32.5	34.2	35.8	37.3	38.7	40.0	41.2	42.4	43.5
-120	12.3	12.8	14.9	17.1	19.3	21.5	23.6	25.6	27.5	29.3	31.0	32.7	34.2	35.7	37.1	38.4	39.6	40.8	41.9
-110	12.3	12.9	14.6	16.6	18.6	20.5	22.4	24.2	26.0	27.8	29.4	31.0	32.5	34.0	35.4	36.8	38.1	39.4	40.6
-100	12.3	13.2	14.5	16.1	17.8	19.6	21.3	22.9	24.5	26.1	27.7	29.3	30.8	32.3	33.8	35.3	36.7	38.1	39.6
-90	12.3	13.8	15.3	16.9	18.4	19.9	21.4	22.9	24.4	26.0	27.5	29.0	30.5	32.0	33.6	35.1	36.6	38.1	39.6
-80	12.3	15.0	17.4	20.2	23.6	27.3	31.3	35.5	40.1	45.1	53.0	62.0	73.2	83.2	93.8	102	108	112	114
-70	12.3	15.8	20.4	27.0	35.9	58.6	102	163	228	289	364	424	491	532	579	619	649	665	668
-60	12.3	16.8	25.1	41.5	101	206	328	469	607	748	884	1023	1109	1181	1272	1360	1404	1426	1432
-50	12.3	18.1	30.9	91.5	234	409	617	820	1058	1219	1417	1553	1671	1770	1851	1912	1953	1977	1983
-40	12.3	19.6	42.5	169	381	635	914	1174	1422	1620	1798	1951	2080	2191	2275	2339	2383	2407	2411
-30	12.3	21.0	63.4	249	521	824	1158	1442	1683	1904	2089	2253	2391	2503	2593	2659	2705	2729	2732
-20	12.3	22.0	84.6	309	631	1013	1326	1617	1878	2100	2298	2468	2610	2728	2822	2889	2934	2955	2953
-10	12.3	22.5	98.8	359	712	1103	1430	1723	1989	2222	2425	2599	2747	2872	2968	3040	3083	3097	3082
0	12.3	22.5	104	377	741	1135	1462	1763	2029	2265	2473	2649	2803	2931	3035	3113	3170	3210	3219
10	12.3	22.2	98.5	359	712	1102	1426	1721	1986	2218	2422	2595	2744	2868	2963	3035	3077	3091	3075
20	12.3	21.4	84.0	309	632	1010	1321	1613	1872	2093	2292	2462	2601	2720	2814	2880	2922	2942	2938
30	12.3	20.1	62.3	249	522	826	1158	1433	1676	1894	2078	2242	2380	2492	2578	2644	2690	2712	2712
40	12.3	18.5	40.5	169	382	637	912	1174	1405	1610	1785	1935	2062	2172	2258	2321	2365	2388	2391
50	12.3	16.8	28.4	89.6	233	412	620	825	1053	1221	1391	1537	1653	1750	1829	1885	1923	1944	1947
60	12.3	15.4	22.1	37.3	98.0	207	330	470	611	752	880	1013	1109	1184	1244	1306	1357	1387	1395
70	12.3	14.3	17.2	22.2	29.7	52.2	97.6	162	227	291	367	430	494	547	588	622	647	661	662
80	12.3	13.4	14.2	15.3	16.8	18.8	21.2	23.8	27.0	30.6	37.3	46.2	59.7	71.5	81.9	90.0	95.8	99.2	100
90	12.3	12.3	12.2	12.2	12.1	12.1	12.0	12.0	11.9	11.9	11.8	11.8	11.8	11.7	11.7	11.6	11.6	11.5	11.5
100	12.3	11.7	11.5	11.5	11.8	12.0	12.3	12.5	12.8	13.0	13.3	13.5	13.7	13.8	13.9	14.0	14.1	14.1	14.1
110	12.3	11.4	11.7	12.3	13.0	13.7	14.3	15.0	15.6	16.2	16.7	17.2	17.7	18.0	18.3	18.5	18.7	18.8	18.8
120	12.3	11.4	12.3	13.3	14.4	15.5	16.5	17.6	18.6	19.5	20.3	21.1	21.8	22.3	22.8	23.1	23.4	23.5	23.5
130	12.3	11.6	12.9	14.3	15.7	17.2	18.6	20.0	21.4	22.6	23.7	24.8	25.6	26.3	26.9	27.4	27.7	27.8	27.8
140	12.3	11.9	13.4	15.2	17.0	18.8	20.5	22.3	23.9	25.4	26.7	28.0	29.1	30.0	30.8	31.5	31.9	32.2	32.2
150	12.3	12.1	13.9	15.9	18.0	20.1	22.1	24.1	26.0	27.7	29.3	30.8	32.3	33.7	35.0	36.0	36.7	37.1	37.1
160	12.3	12.2	14.2	16.5	18.8	21.1	23.4	25.5	27.6	29.5	31.4	33.4	35.4	37.4	39.2	40.9	42.1	42.7	42.7
170	12.3	12.3	14.5	16.8	19.3	21.7	24.1	26.4	28.6	30.8	33.0	35.3	37.8	40.4	42.9	45.2	46.9	47.8	47.6
180	12.3	12.3	14.5	16.9	19.4	22.0	24.4	26.8	29.0	31.3	33.7	36.3	39.0	41.9	44.9	47.6	50.1	52.2	52.3

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-11-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.5V I:0.4234A P:90.17W PF:0.985 Freq:50.47Hz Lamp Flux:9054.5x1 lm																		
NAME:									TYPE:					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:				
MFR.: EVERFINE									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	52.7	52.6	52.0	51.0	49.8	48.6	47.4	46.2	45.1	44.2	43.5	42.8	42.1	41.5	41.0	40.6	40.3	40.1	
-170	52.1	51.8	51.2	50.2	49.2	48.1	47.0	45.9	44.9	44.1	43.3	42.6	42.0	41.5	41.0	40.5	40.3	40.1	
-160	50.3	50.0	49.4	48.7	47.9	47.0	46.1	45.2	44.4	43.7	43.0	42.4	41.8	41.3	40.9	40.5	40.3	40.1	
-150	47.8	47.6	47.3	46.8	46.2	45.6	44.9	44.2	43.7	43.1	42.6	42.0	41.6	41.1	40.7	40.4	40.2	40.1	
-140	45.5	45.4	45.1	44.8	44.5	44.1	43.7	43.3	42.9	42.4	42.0	41.6	41.2	40.9	40.6	40.3	40.2	40.1	
-130	43.5	43.5	43.4	43.2	43.0	42.8	42.6	42.3	42.0	41.7	41.4	41.2	40.9	40.6	40.4	40.3	40.2	40.1	
-120	42.0	42.0	42.0	41.9	41.8	41.7	41.5	41.4	41.2	41.0	40.9	40.7	40.5	40.3	40.2	40.2	40.2	40.1	
-110	40.7	40.7	40.7	40.7	40.7	40.7	40.6	40.5	40.5	40.4	40.3	40.2	40.2	40.1	40.2	40.2	40.1	40.1	
-100	39.6	39.7	39.7	39.7	39.7	39.8	39.8	39.8	39.8	39.9	40.0	40.0	40.1	40.1	40.1	40.1	40.1	40.1	
-90	39.7	39.7	39.7	39.7	39.8	39.8	39.8	39.9	39.9	39.9	39.9	40.0	40.0	40.0	40.0	40.1	40.1	40.1	
-80	112	108	102	94.3	85.3	77.2	68.4	61.3	54.7	51.7	49.2	46.9	45.1	43.7	42.7	41.9	41.0	40.1	
-70	660	637	601	556	507	461	390	327	254	194	142	98.8	69.6	51.6	46.5	43.5	41.9	40.1	
-60	1422	1395	1346	1252	1154	1073	976	830	696	548	413	277	167	96.9	57.4	46.0	42.5	40.1	
-50	1977	1952	1908	1846	1762	1656	1530	1383	1168	990	757	544	346	185	91.0	49.9	43.2	40.1	
-40	2407	2382	2338	2272	2188	2078	1944	1786	1591	1378	1107	828	553	313	137	59.6	43.9	40.1	
-30	2729	2705	2659	2591	2502	2387	2250	2086	1890	1657	1396	1080	745	444	192	74.5	44.6	40.1	
-20	2954	2933	2888	2822	2727	2607	2465	2292	2096	1862	1578	1254	903	540	245	86.8	45.2	40.1	
-10	3097	3082	3038	2966	2868	2745	2596	2420	2215	1980	1695	1370	1004	617	285	94.1	45.6	40.1	
0	3207	3169	3111	3033	2928	2800	2646	2469	2260	2024	1737	1406	1035	644	298	96.3	45.7	40.1	
10	3091	3076	3034	2961	2865	2742	2592	2417	2212	1976	1693	1367	1003	617	285	93.9	45.3	40.1	
20	2941	2921	2879	2813	2719	2599	2459	2286	2089	1857	1574	1250	901	541	245	86.2	44.6	40.1	
30	2712	2689	2644	2576	2490	2377	2239	2075	1881	1649	1386	1080	748	445	192	73.3	43.8	40.1	
40	2387	2364	2320	2256	2169	2060	1927	1773	1580	1361	1107	827	554	314	137	57.5	42.8	40.1	
50	1944	1921	1882	1824	1742	1638	1514	1357	1169	985	763	547	348	185	89.1	47.4	41.9	40.1	
60	1384	1348	1293	1223	1156	1073	966	826	701	552	414	278	168	94.1	53.2	43.0	41.1	40.1	
70	655	636	604	565	522	463	396	330	256	194	141	94.3	63.2	45.4	41.7	40.3	40.3	40.1	
80	98.8	95.2	89.7	82.4	73.6	63.6	52.7	45.6	40.3	38.6	37.5	36.8	36.6	37.0	37.8	38.7	39.4	40.1	
90	13.1	14.7	16.3	17.9	19.4	21.0	22.6	24.2	25.8	27.4	29.0	30.6	32.2	33.8	35.3	36.9	38.5	40.1	
100	15.6	17.0	18.5	19.9	21.3	22.6	24.0	25.4	26.8	28.2	29.6	31.0	32.5	34.0	35.6	37.1	38.6	40.1	
110	20.1	21.3	22.5	23.6	24.7	25.8	26.8	27.9	28.9	30.0	31.0	32.2	33.3	34.6	35.9	37.3	38.7	40.1	
120	24.7	25.7	26.7	27.6	28.4	29.2	30.0	30.7	31.4	32.1	32.9	33.6	34.5	35.4	36.4	37.6	38.8	40.1	
130	28.9	29.9	30.7	31.5	32.1	32.6	33.1	33.5	33.9	34.3	34.8	35.2	35.8	36.4	37.1	38.0	39.0	40.1	
140	33.3	34.1	34.8	35.3	35.7	35.9	36.1	36.3	36.5	36.6	36.7	36.9	37.1	37.4	37.9	38.5	39.2	40.1	
150	38.2	38.9	39.3	39.5	39.5	39.4	39.2	39.0	38.9	38.7	38.6	38.5	38.4	38.5	38.7	39.0	39.5	40.1	
160	43.7	44.2	44.2	43.9	43.4	42.8	42.2	41.7	41.2	40.7	40.4	40.0	39.7	39.6	39.5	39.5	39.7	40.1	
170	48.7	48.9	48.6	47.9	47.0	46.0	45.0	44.1	43.3	42.6	42.0	41.5	41.0	40.6	40.3	40.0	40.0	40.1	
180	52.7	52.6	52.0	51.0	49.8	48.6	47.4	46.2	45.1	44.2	43.5	42.8	42.1	41.5	41.0	40.6	40.3	40.1	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-11-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	3219	3124	3219	3124
3.0	3213	3121	3215	3121
6.0	3203	3111	3205	3107
9.0	3180	3090	3180	3085
12.0	3148	3062	3150	3052
15.0	3111	3030	3113	3016
18.0	3068	2986	3070	2973
21.0	3014	2934	3017	2918
24.0	2950	2873	2954	2856
27.0	2880	2806	2885	2790
30.0	2800	2732	2803	2712
33.0	2711	2645	2713	2623
36.0	2613	2552	2616	2527
39.0	2507	2448	2511	2427
42.0	2387	2336	2393	2313
45.0	2260	2215	2265	2187
48.0	2122	2079	2127	2047
51.0	1968	1933	1980	1897
54.0	1801	1775	1820	1744
57.0	1601	1608	1647	1578
60.0	1406	1432	1462	1395
63.0	1179	1147	1266	1151
66.0	957.6	969.2	1069	947.7
69.0	708.5	719.4	801.8	735.8
72.0	486.4	510.0	570.4	532.4
75.0	297.6	334.7	377.2	338.5
78.0	151.1	184.7	200.1	190.6
81.0	79.96	85.48	71.60	69.11
84.0	48.12	52.93	26.20	22.74
87.0	42.89	44.21	16.38	13.59
90.0	40.12	39.64	12.30	11.49
93.0	40.21	39.73	11.52	12.01
96.0	40.35	39.32	12.75	12.45
99.0	40.49	39.45	14.08	13.69
102.0	40.72	39.77	15.47	15.03
105.0	41.02	40.11	16.94	16.41
108.0	41.32	40.43	18.44	17.82
111.0	41.63	40.76	19.94	19.24
114.0	41.98	41.15	21.47	20.68
117.0	42.35	41.54	22.96	22.10
120.0	42.77	41.95	24.43	23.47
123.0	43.19	42.38	25.87	24.82
126.0	43.62	42.82	27.25	26.10
129.0	44.08	43.30	28.60	27.37
132.0	44.59	43.82	29.94	28.64
135.0	45.15	44.38	31.31	29.92
138.0	45.78	45.01	32.71	31.25
141.0	46.43	45.67	34.18	32.63
144.0	47.13	46.37	35.72	34.06
147.0	47.83	47.10	37.30	35.56
150.0	48.56	47.85	38.99	37.14
153.0	49.29	48.59	40.73	38.79
156.0	50.01	49.35	42.49	40.45
159.0	50.73	50.09	44.26	42.13
162.0	51.38	50.79	46.02	43.75
165.0	51.96	51.36	47.64	45.27
168.0	52.38	51.81	49.17	46.67
171.0	52.66	52.05	50.57	47.96
174.0	52.73	52.09	51.84	49.13
177.0	52.64	51.92	52.83	50.01
180.0	52.29	51.62	53.68	50.68

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Jason
 Test Date: 2025-11-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.200m [K=1.0000]
 Remarks: