


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:219.12V I:0.4917A P:101.25W PF:0.9397 Freq:50.09Hz Lamp Flux:19660.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 194.18 lm/W			
MODEL		I _{max} (cd)	8407	S/MH (C0/180)	1.26
NOMINAL POWER (W)	100	LOR (%)	100.0	S/MH (C90/270)	1.29
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	19661	η UP, DN (C0-180)	1.6, 50.0
NOMINAL FLUX (lm)	19660.7	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 47.6
LAMPS INSIDE	1	η up (%)	2.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	220	η down (%)	97.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

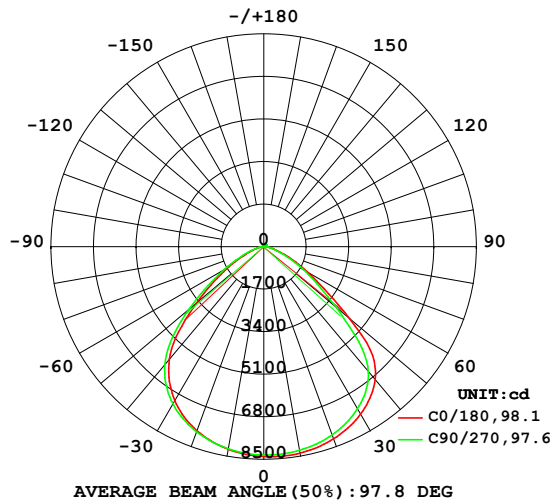

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

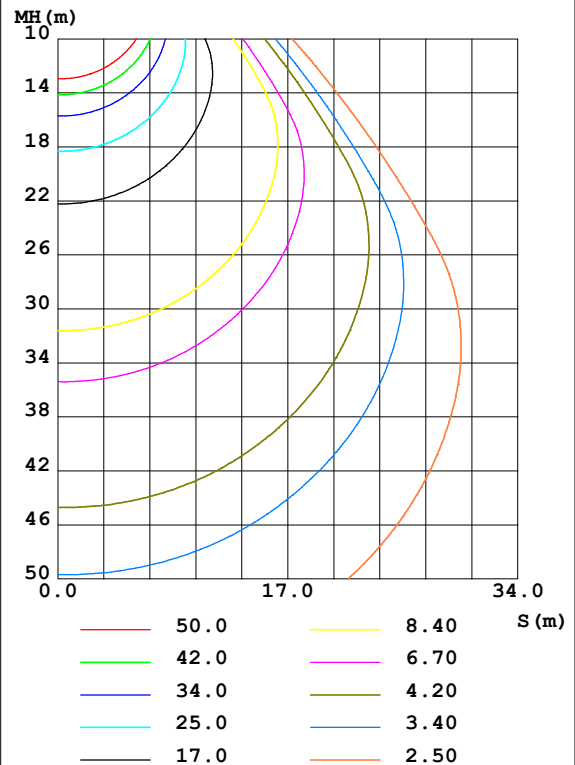

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2026-01-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	8373	8344	8265	8165	8218	8179	8200	8238	0- 10	791.8	791.8	4.03,4.03
20	8167	8145	8001	7825	7822	7775	7871	7989	10- 20	2297	3089	15.7,15.7
30	7733	7709	7486	7191	7110	7060	7260	7500	20- 30	3552	6641	33.8,33.8
40	6933	6899	6498	5921	5868	5839	6148	6597	30- 40	4333	10974	55.8,55.8
50	4483	4415	3777	3376	3512	3580	3909	4250	40- 50	4054	15028	76.4,76.4
60	1990	2001	1809	1494	1608	1688	1810	2076	50- 60	2446	17474	88.9,88.9
70	788.8	787.6	686.7	553.3	560.7	601.1	654.2	774.3	60- 70	1162	18636	94.8,94.8
80	271.4	271.6	237.6	190.2	152.9	158.6	174.5	223.2	70- 80	421.6	19057	96.9,96.9
90	94.99	93.78	90.47	88.71	30.50	30.84	33.39	38.43	80- 90	132.7	19190	97.6,97.6
100	88.80	88.38	87.97	87.93	31.39	31.20	30.42	29.84	90-100	64.87	19255	97.9,97.9
110	90.99	90.42	90.70	91.40	37.34	37.09	35.40	34.05	100-110	64.69	19320	98.3,98.3
120	96.04	95.34	95.93	97.06	46.28	45.84	43.53	41.59	110-120	66.10	19386	98.6,98.6
130	102.5	101.9	102.2	103.9	56.71	55.88	53.48	51.16	120-130	66.59	19452	98.9,98.9
140	109.1	108.4	108.4	109.7	66.06	64.88	62.58	60.12	130-140	63.72	19516	99.3,99.3
150	116.0	115.1	114.7	115.6	75.49	74.14	71.60	69.49	140-150	56.38	19572	99.6,99.6
160	124.1	123.2	122.3	122.6	91.50	90.09	86.95	84.23	150-160	45.92	19618	99.8,99.8
170	126.9	126.1	124.2	123.3	108.8	107.2	104.2	101.4	160-170	31.28	19650	99.9,99.9
180	121.2	120.3	117.3	115.3	121.8	119.9	117.6	115.1	170-180	11.16	19661	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 13153 lm

%lum = 66.9%

%lamp = 66.9%

Conical surface Flux(120deg): 17474 lm

%lum = 88.9%


%lamp = 88.9%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:2026-01-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.850m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:219.12V I:0.4917A P:101.25W PF:0.9397 Freq:50.09Hz Lamp Flux:19660.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

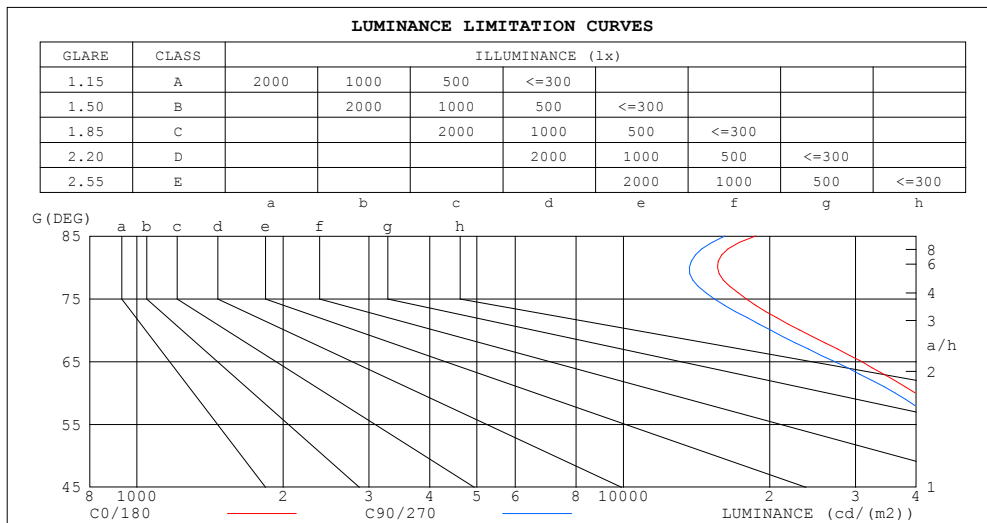

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	18697	16178
80	15627	13681
75	17869	15369
70	23063	20078
65	30882	27150
60	39802	36180
55	51624	45594
50	69740	58760
45	86967	75967


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2026-01-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:219.12V I:0.4917A P:101.25W PF:0.9397 Freq:50.09Hz Lamp Flux:19660.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.06	1.03	.00	1.04	1.01	.98	.99	.97	.94	.95	.93	.91	.91	.89	.88	.86
2.0	.95	.89	.84	.93	.88	.83	.89	.85	.81	.85	.82	.79	.82	.79	.77	.75
3.0	.85	.78	.72	.83	.77	.71	.80	.74	.70	.77	.72	.68	.74	.70	.67	.65
4.0	.76	.68	.63	.75	.68	.62	.72	.66	.61	.70	.64	.60	.67	.63	.59	.57
5.0	.69	.61	.55	.68	.60	.54	.65	.59	.54	.63	.57	.53	.61	.56	.52	.50
6.0	.62	.54	.48	.61	.54	.48	.59	.53	.48	.58	.52	.47	.56	.51	.46	.44
7.0	.57	.49	.43	.56	.48	.43	.54	.47	.42	.53	.47	.42	.51	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.39	.50	.43	.38	.48	.42	.38	.47	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.34	.44	.38	.34	.32
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.31	.41	.35	.31	.29

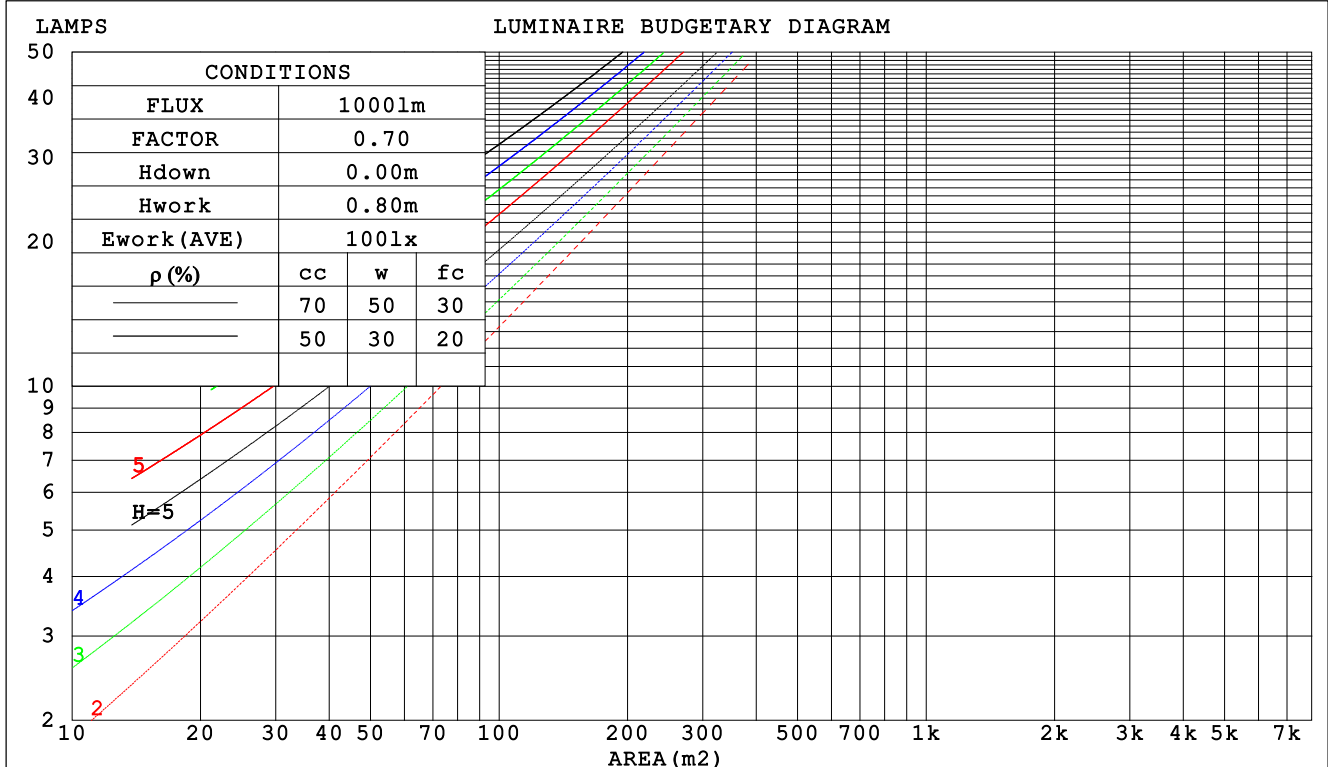

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2026-01-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:219.12V I:0.4917A P:101.25W PF:0.9397 Freq:50.09Hz Lamp Flux:19660.7x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.: EVERFINE		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.252	.143	.045	.245	.139	.044	.230	.132	.042	.217	.125	.040	.205	.119	.038		
2.0	.244	.134	.041	.237	.131	.040	.225	.125	.039	.213	.120	.037	.202	.114	.036		
3.0	.231	.123	.037	.225	.121	.036	.214	.116	.035	.204	.112	.034	.194	.108	.033		
4.0	.218	.113	.033	.213	.111	.033	.203	.108	.032	.194	.104	.031	.185	.101	.031		
5.0	.205	.104	.030	.200	.103	.030	.191	.100	.029	.183	.097	.029	.176	.094	.028		
6.0	.193	.097	.028	.189	.095	.027	.181	.093	.027	.173	.090	.026	.167	.088	.026		
7.0	.182	.090	.025	.178	.089	.025	.171	.086	.025	.164	.084	.024	.158	.082	.024		
8.0	.171	.084	.024	.168	.083	.023	.162	.081	.023	.156	.079	.023	.150	.077	.022		
9.0	.162	.078	.022	.159	.077	.022	.153	.076	.021	.148	.074	.021	.142	.072	.021		
10.0	.153	.073	.020	.151	.073	.020	.145	.071	.020	.140	.070	.020	.136	.068	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.178	.178	.178	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.195	.175	.157	.167	.150	.135	.114	.103	.094	.066	.060	.054	.021	.019	.018	
2.0	.184	.151	.122	.158	.130	.106	.108	.090	.074	.062	.052	.043	.020	.017	.014	
3.0	.176	.133	.098	.151	.114	.085	.103	.079	.060	.060	.046	.035	.019	.015	.012	
4.0	.168	.119	.082	.144	.103	.071	.099	.072	.050	.057	.042	.030	.018	.014	.010	
5.0	.161	.108	.070	.138	.094	.061	.095	.065	.043	.055	.038	.025	.018	.013	.008	
6.0	.154	.100	.061	.132	.086	.053	.091	.061	.038	.053	.036	.022	.017	.012	.007	
7.0	.148	.093	.054	.127	.081	.047	.088	.056	.034	.051	.033	.020	.016	.011	.007	
8.0	.142	.087	.049	.122	.076	.043	.085	.053	.031	.049	.031	.018	.016	.010	.006	
9.0	.136	.082	.046	.118	.071	.040	.081	.050	.028	.047	.030	.017	.015	.010	.006	
10.0	.131	.078	.043	.113	.068	.037	.078	.048	.026	.046	.028	.016	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2026-01-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:219.12V I:0.4917A P:101.25W PF:0.9397 Freq:50.09Hz Lamp Flux:19660.7x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: EVERFINE					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	16.2	17.5	16.4	17.7	18.0	15.7	17.0	16.0	17.3	17.5
	3H	16.5	17.7	16.8	18.0	18.2	16.0	17.2	16.3	17.5	17.8
	4H	16.6	17.7	16.9	18.0	18.3	16.1	17.2	16.4	17.5	17.8
	6H	16.6	17.6	16.9	18.0	18.3	16.1	17.1	16.4	17.5	17.8
	8H	16.6	17.6	16.9	17.9	18.3	16.1	17.1	16.4	17.4	17.8
	12H	16.6	17.6	17.0	17.9	18.2	16.1	17.1	16.5	17.4	17.7
4H	2H	16.3	17.4	16.6	17.7	18.0	15.9	17.0	16.2	17.3	17.6
	3H	16.7	17.7	17.1	18.0	18.4	16.3	17.3	16.7	17.6	18.0
	4H	16.8	17.7	17.2	18.1	18.5	16.4	17.3	16.8	17.7	18.0
	6H	16.9	17.7	17.4	18.1	18.5	16.5	17.3	16.9	17.7	18.1
	8H	17.0	17.7	17.4	18.1	18.5	16.5	17.2	17.0	17.7	18.1
	12H	17.0	17.7	17.5	18.1	18.6	16.6	17.2	17.0	17.6	18.1
8H	4H	16.8	17.6	17.3	18.0	18.4	16.4	17.1	16.9	17.5	18.0
	6H	17.0	17.6	17.5	18.0	18.5	16.6	17.2	17.0	17.6	18.1
	8H	17.1	17.6	17.6	18.1	18.6	16.6	17.2	17.1	17.6	18.1
	12H	17.2	17.6	17.7	18.1	18.6	16.7	17.2	17.2	17.7	18.2
12H	4H	16.8	17.5	17.3	17.9	18.3	16.4	17.0	16.8	17.5	17.9
	6H	17.0	17.5	17.5	18.0	18.5	16.6	17.1	17.0	17.5	18.0
	8H	17.1	17.5	17.6	18.0	18.5	16.7	17.1	17.2	17.6	18.1
Variations with the observer position at spacings:											
S = 1.0H		+ 0.9 / - 0.9					+ 0.9 / - 1.1				
1.5H		+ 0.7 / - 0.7					+ 0.5 / - 0.7				
2.0H		+ 2.0 / - 1.6					+ 1.9 / - 1.5				

CIE Pub.117, 19661 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 10.3)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2026-01-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:219.12V I:0.4917A P:101.25W PF:0.9397 Freq:50.09Hz Lamp Flux:19660.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	64	53	47	63	53	47	62	52	47	41
0.80	74	64	57	73	63	57	71	62	57	50
1.00	82	73	67	81	72	66	79	73	66	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	93	85	80	92	84	79	89	82	78	71
2.00	99	92	87	97	91	86	94	89	84	77
2.50	102	96	91	100	95	90	96	92	88	80
3.00	105	100	95	103	98	94	99	95	91	83
4.00	108	104	100	106	102	98	101	98	95	86
5.00	110	106	103	108	104	101	103	100	98	88
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2026-01-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.12V I:0.4917A P:101.25W PF:0.9397 Freq:50.09Hz Lamp Flux:19660.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

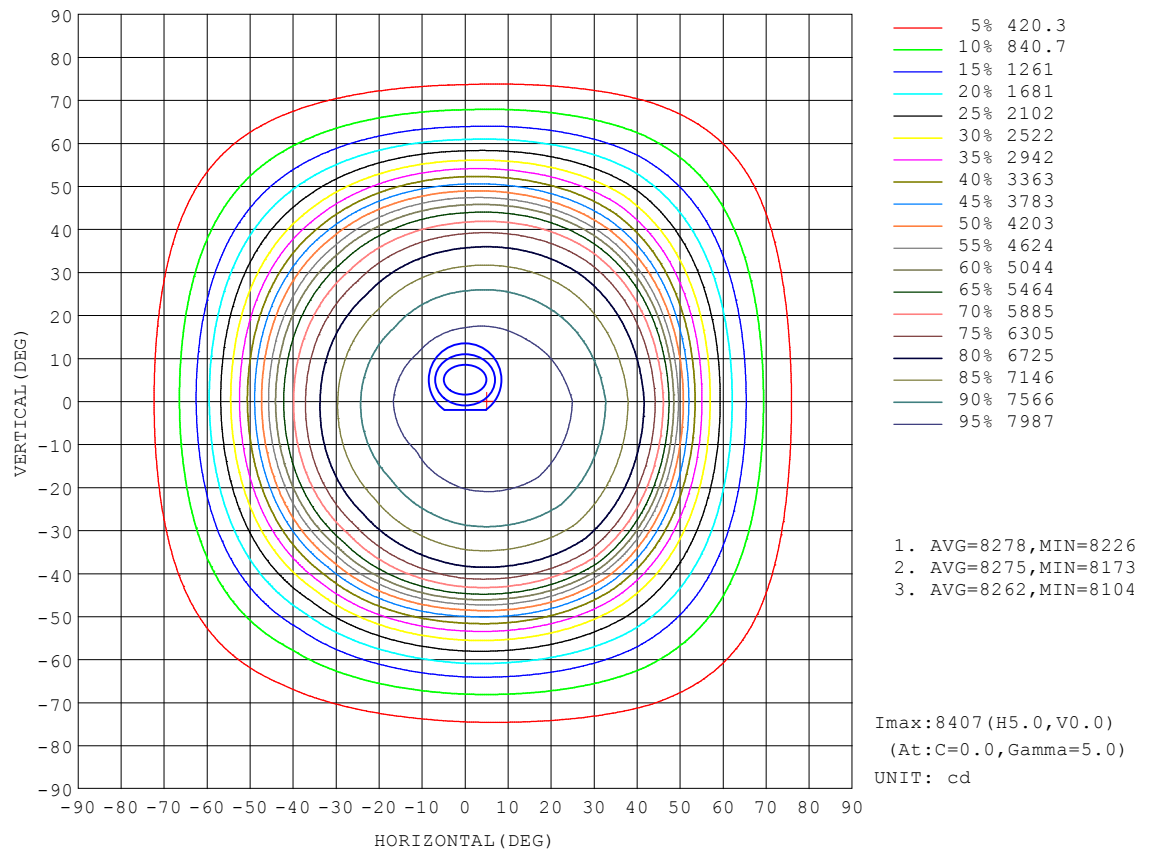


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2026-01-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.12V I:0.4917A P:101.25W PF:0.9397 Freq:50.09Hz Lamp Flux:19660.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

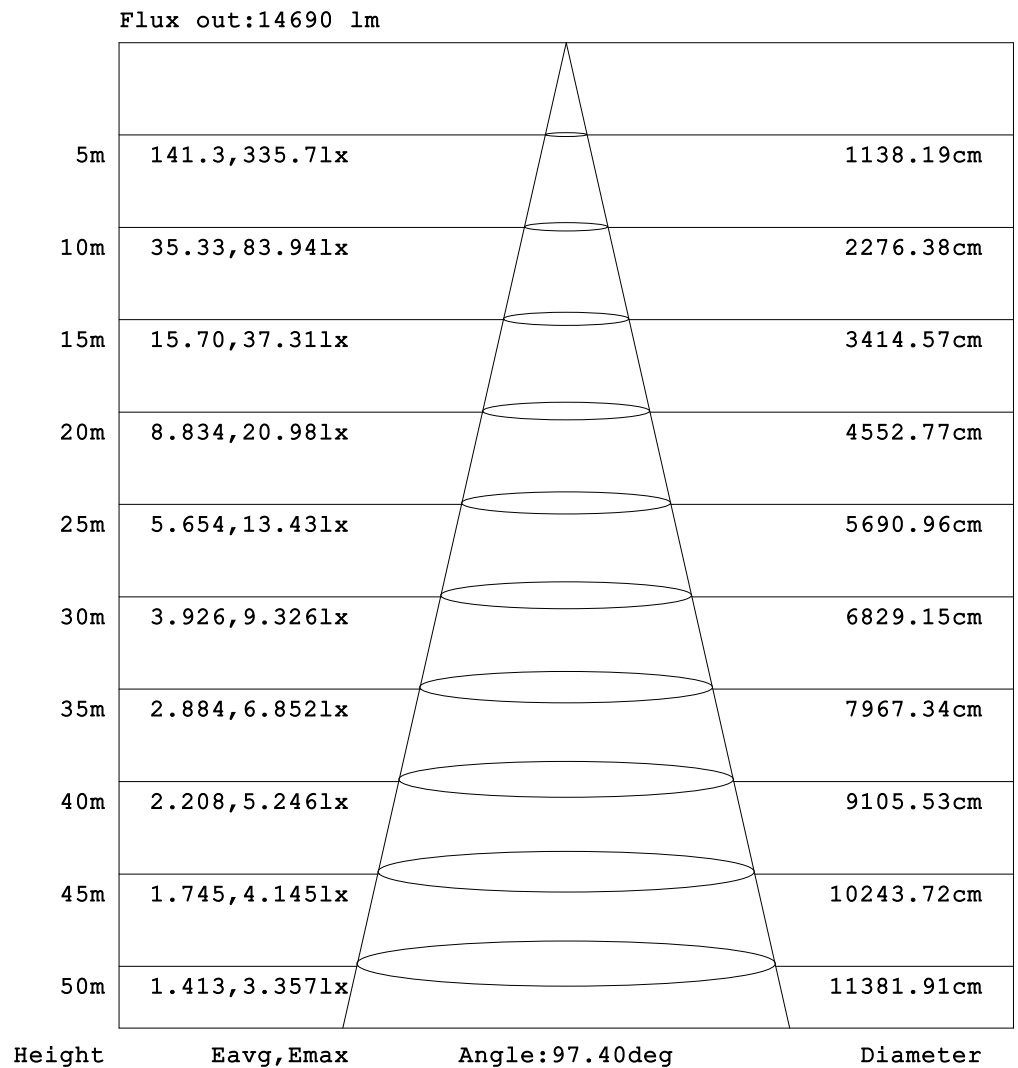


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Jason
 Test Date: 2026-01-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.850m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:219.12V I:0.4917A P:101.25W PF:0.9397 Freq:50.09Hz Lamp Flux:19660.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

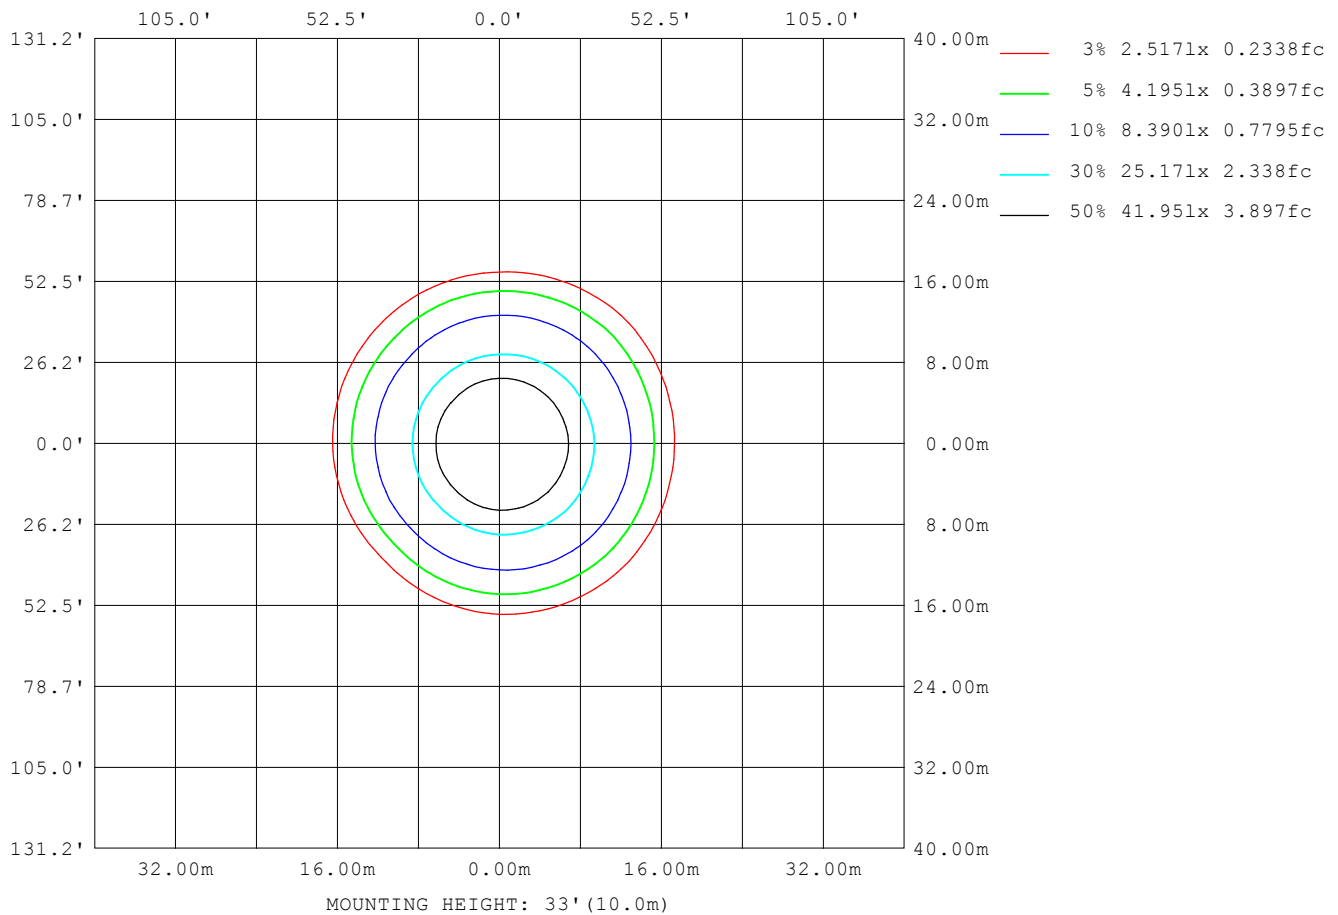

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2026-01-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:219.12V I:0.4917A P:101.25W PF:0.9397 Freq:50.09Hz Lamp Flux:19660.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	27022
L_0~180 (75) av	14618
L_0~180 (85) av	13458
L_90~270 (65) av	26884
L_90~270 (75) av	14390
L_90~270 (85) av	12943
L_45 (65) av	27211
L_45 (75) av	14687
L_45 (85) av	13437

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2026-01-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

Planar Illuminance Curve

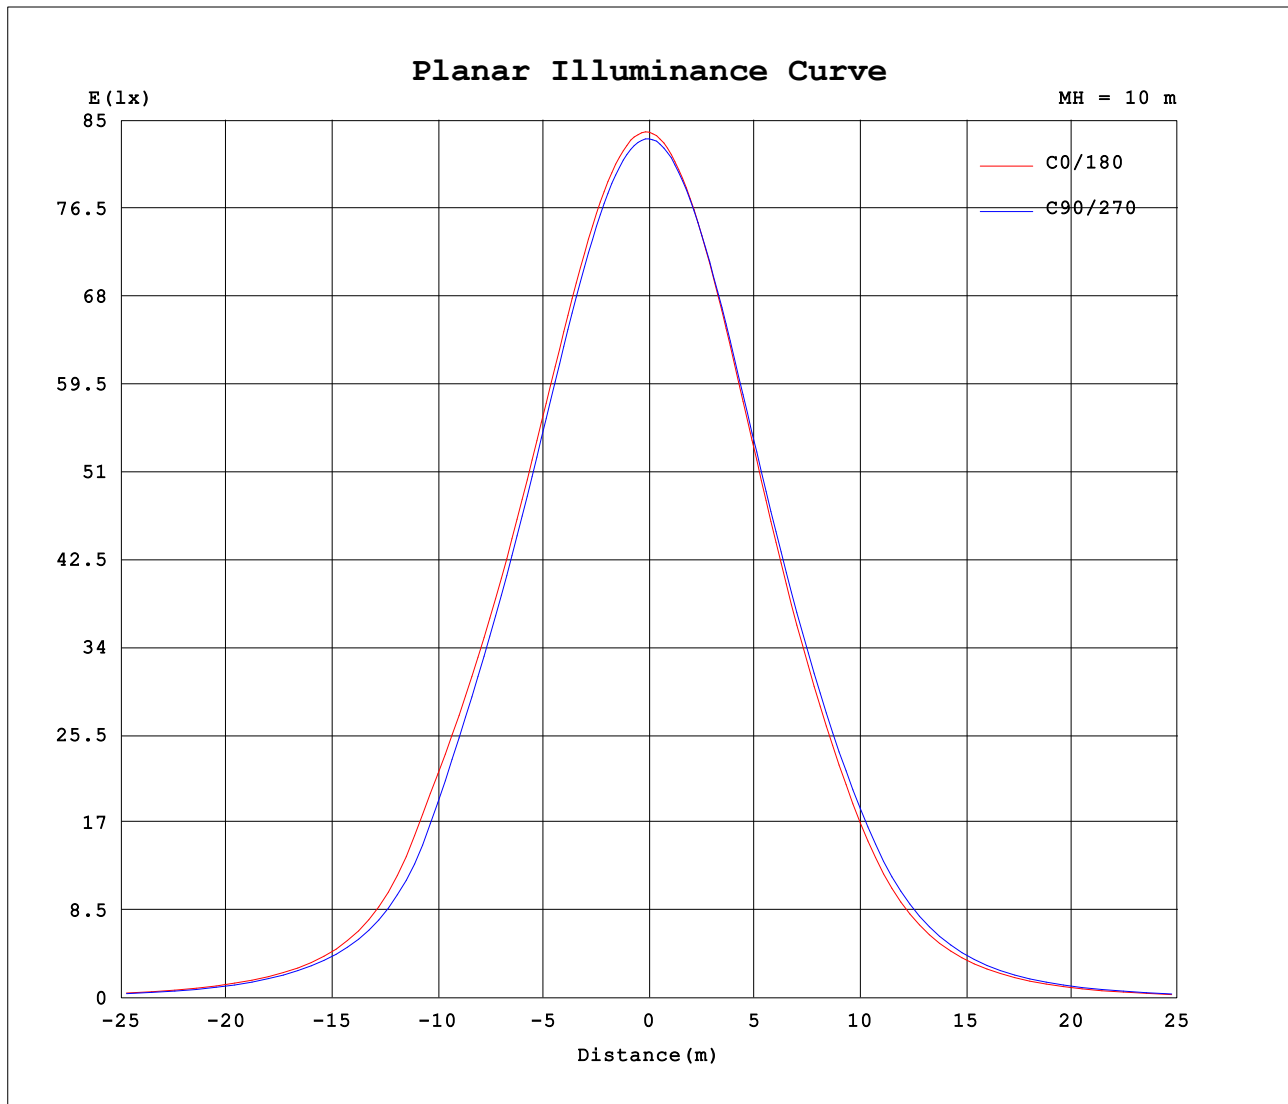

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2026-01-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.12V I:0.4917A P:101.25W PF:0.9397 Freq:50.09Hz Lamp Flux:19660.7x1 lm								
NAME:				TYPE:				WEIGHT:
SPEC.:				DIM.:				SERIAL No.:
MFR.: EVERFINE				SUR.:				Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	8390	8352	8323	8295	8390	8352	8323	8295										
5	8407	8374	8316	8257	8330	8291	8285	8291										
10	8373	8344	8265	8165	8218	8179	8200	8238										
15	8301	8275	8158	8026	8053	8012	8066	8139										
20	8167	8145	8001	7825	7822	7775	7871	7989										
25	7984	7960	7785	7555	7519	7468	7612	7776										
30	7733	7709	7486	7191	7110	7060	7260	7500										
35	7398	7373	7098	6691	6575	6527	6796	7126										
40	6933	6899	6498	5921	5868	5839	6148	6597										
45	6150	6090	5372	4713	4810	4820	5202	5722										
50	4483	4415	3777	3376	3512	3580	3909	4250										
55	2961	2950	2615	2281	2423	2496	2728	3035										
60	1990	2001	1809	1494	1608	1688	1810	2076										
65	1305	1308	1147	925	979	1045	1125	1323										
70	789	788	687	553	561	601	654	774										
75	462	462	398	316	294	313	347	429										
80	271	272	238	190	153	159	175	223										
85	163	159	141	117	71.6	75.0	84.6	117										
90	95.0	93.8	90.5	88.7	30.5	30.8	33.4	38.4										
95	89.3	89.0	88.0	87.5	29.8	29.7	29.3	29.0										
100	88.8	88.4	88.0	87.9	31.4	31.2	30.4	29.8										
105	89.4	88.9	88.9	89.3	33.9	33.7	32.4	31.5										
110	91.0	90.4	90.7	91.4	37.3	37.1	35.4	34.1										
115	93.3	92.6	93.1	94.1	41.5	41.1	39.1	37.5										
120	96.0	95.3	95.9	97.1	46.3	45.8	43.5	41.6										
125	99.2	98.6	98.9	100	51.5	50.9	48.5	46.3										
130	102	102	102	104	56.7	55.9	53.5	51.2										
135	106	105	105	107	61.6	60.5	58.2	55.7										
140	109	108	108	110	66.1	64.9	62.6	60.1										
145	112	112	111	112	70.4	69.1	66.8	64.6										
150	116	115	115	116	75.5	74.1	71.6	69.5										
155	120	119	118	119	82.9	81.5	78.5	76.1										
160	124	123	122	123	91.5	90.1	87.0	84.2										
165	126	125	124	124	101	99.4	96.2	93.4										
170	127	126	124	123	109	107	104	101										
175	125	124	122	120	116	114	111	109										
180	121	120	117	115	122	120	118	115										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2026-01-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks: