


室内灯具光度数据

实测参数: U:218.6V I:0.7045A P:148.9W PF:0.967 Freq:49.99Hz 实检光通:29814.7±1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

光源数据		光度数据				光效: 200.21 lm/W
型号		峰值光强(cd)	13336	S/MH(C0/180)	1.24	
标称功率(W)	150	灯具效率(%)	100.0	S/MH(C90/270)	1.31	
额定电源电压(V)	220	总光通量(lm)	29815	η UP,DN(C0-180)	1.2,48.0	
额定光通量(lm)	29814.7	CIE分类	直接	η UP,DN(C180-360)	1.1,49.7	
灯具内光源数(只)	1	上射光通比(%)	2.3	CIBSE SHR NOM	1.25	
实测电源电压(V)	220	下射光通比(%)	97.7	CIBSE SHR MAX	1.35	

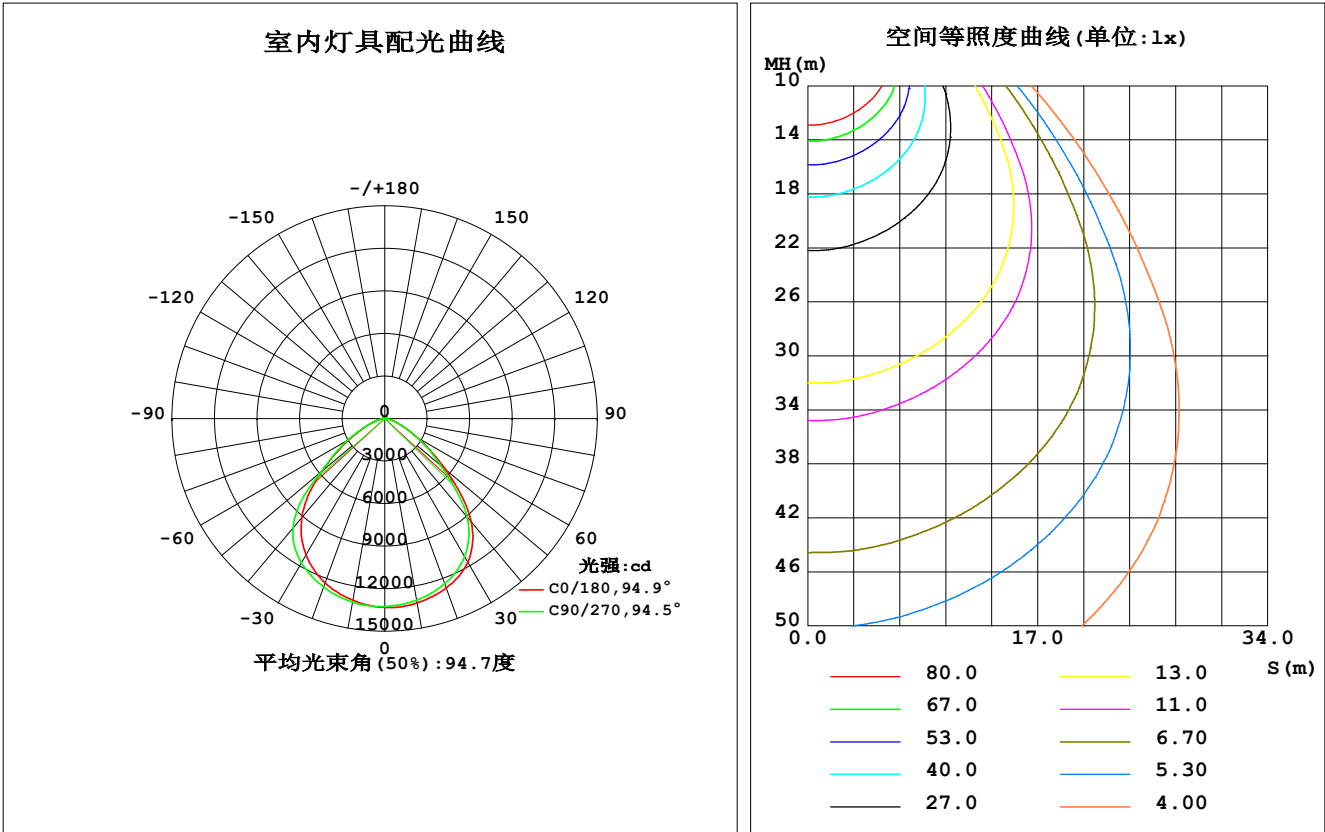

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-06

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C90	C180	C270					γ(°)	Φ环	Φ总	%lum, lamp
10	1319	1301	1301	1314					0- 10	1259	1259	4.22,4.22
20	1270	1238	1232	1262					10- 20	3628	4887	16.4,16.4
30	1171	1126	1110	1175					20- 30	5557	10443	35,35
40	949.5	902.8	909.4	1007					30- 40	6604	17047	57.2,57.2
50	561.1	517.0	581.6	591.4					40- 50	5866	22913	76.9,76.9
60	259.2	257.9	276.9	296.6					50- 60	3631	26544	89,89
70	102.9	101.6	106.8	113.4					60- 70	1762	28306	94.9,94.9
80	28.60	25.73	31.77	31.87					70- 80	676.4	28982	97.2,97.2
90	9.465	9.272	5.611	5.496					80- 90	136.3	29119	97.7,97.7
100	8.359	8.148	6.597	6.441					90-100	80.02	29199	97.9,97.9
110	8.581	8.701	8.175	7.984					100-110	82.43	29281	98.2,98.2
120	9.835	10.05	10.10	9.826					110-120	90.41	29371	98.5,98.5
130	11.63	11.91	12.28	11.90					120-130	97.74	29469	98.8,98.8
140	13.69	14.07	14.48	14.04					130-140	100.4	29570	99.2,99.2
150	15.77	16.08	16.49	15.98					140-150	94.48	29664	99.5,99.5
160	17.72	17.92	18.36	17.90					150-160	78.65	29743	99.8,99.8
170	19.30	19.38	19.80	19.43					160-170	53.01	29796	99.9,99.9
180	20.18	20.07	20.25	20.00					170-180	18.88	29815	100,100
单位:°	光强:×10cd									单位:lm		

锥面光通量(90度): 20231 lm

%lum = 67.9%
%lamp = 67.9%

锥面光通量(120度): 26544 lm


%lum = 89.0%
%lamp = 89.0%

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-06

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数: U:218.6V I:0.7045A P:148.9W PF:0.967 Freq:49.99Hz 实检光通:29814.7x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

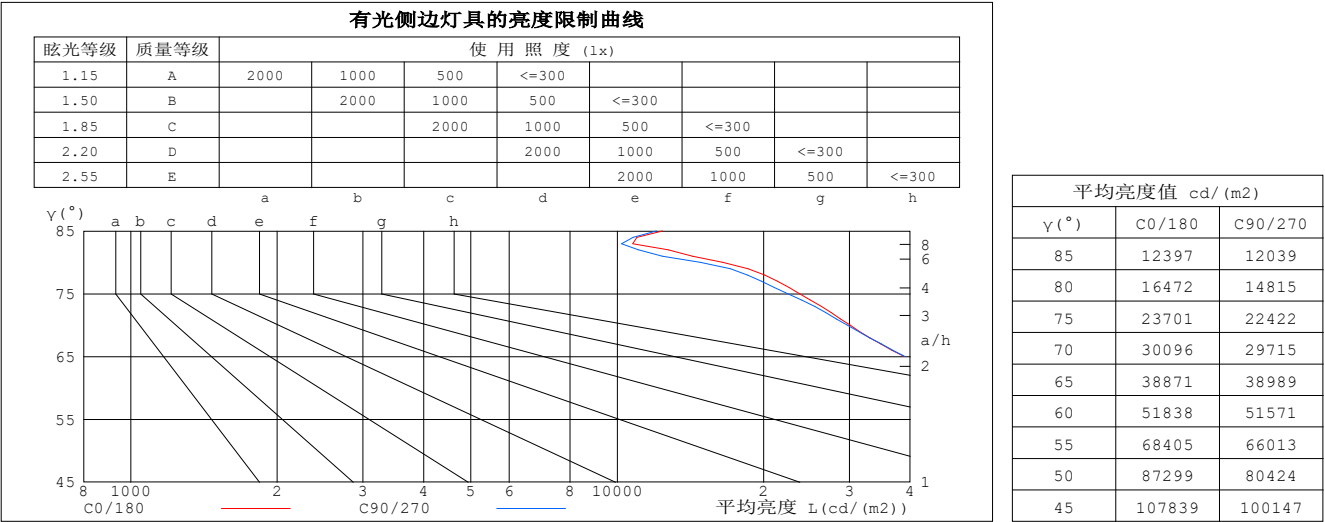


C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-06

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:218.6V I:0.7045A P:148.9W PF:0.967 Freq:49.99Hz 实检光通:29814.7x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.06	1.03	.00	1.04	1.01	.98	.99	.97	.95	.95	.93	.91	.91	.90	.88	.86
2.0	.95	.89	.85	.93	.88	.83	.89	.85	.81	.86	.82	.79	.83	.80	.77	.75
3.0	.85	.78	.73	.83	.77	.72	.80	.75	.70	.77	.73	.69	.75	.71	.67	.65
4.0	.77	.69	.63	.75	.68	.63	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.61	.55	.68	.61	.55	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.63	.55	.49	.62	.54	.49	.60	.53	.48	.58	.52	.48	.56	.51	.47	.45
7.0	.57	.49	.44	.56	.49	.44	.55	.48	.43	.53	.47	.43	.52	.46	.42	.40
8.0	.53	.45	.39	.52	.44	.39	.50	.44	.39	.49	.43	.39	.48	.42	.38	.36
9.0	.48	.41	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.44	.39	.35	.33
10.0	.45	.37	.33	.44	.37	.32	.43	.37	.32	.42	.36	.32	.41	.36	.32	.30

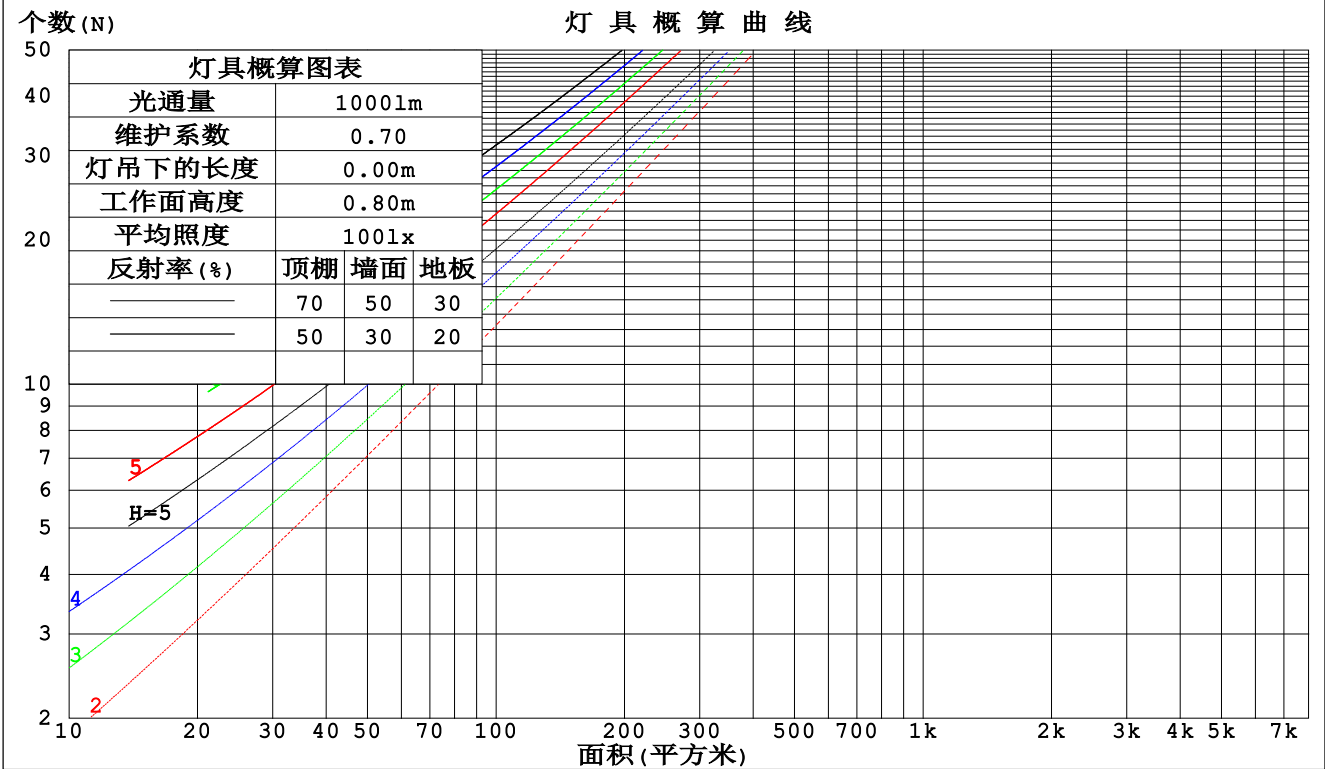

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-06

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:218.6V I:0.7045A P:148.9W PF:0.967 Freq:49.99Hz 实检光通:29814.7x1 lm					
灯具名称:			灯具类型:		灯具重量:
灯具规格:			外型尺寸:		测试编号:
制造厂商: EVERFINE			发光口面:		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.249	.142	.045	.241	.138	.044	.227	.130	.042	.214	.123	.040	.202	.117	.038	
2.0	.241	.132	.041	.235	.129	.040	.222	.124	.038	.211	.118	.037	.200	.113	.036	
3.0	.229	.122	.037	.223	.120	.036	.212	.115	.035	.202	.111	.034	.193	.107	.033	
4.0	.216	.112	.033	.211	.110	.033	.201	.107	.032	.192	.103	.031	.183	.100	.030	
5.0	.203	.104	.030	.199	.102	.030	.190	.099	.029	.182	.096	.029	.174	.093	.028	
6.0	.191	.096	.027	.187	.094	.027	.179	.092	.027	.172	.089	.026	.165	.087	.026	
7.0	.180	.089	.025	.176	.088	.025	.169	.086	.025	.163	.083	.024	.157	.081	.024	
8.0	.170	.083	.023	.167	.082	.023	.160	.080	.023	.154	.078	.023	.149	.076	.022	
9.0	.161	.078	.022	.158	.077	.022	.152	.075	.021	.147	.073	.021	.141	.072	.021	
10.0	.152	.073	.020	.149	.072	.020	.144	.071	.020	.139	.069	.020	.135	.068	.019	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.208	.208	.208	.178	.178	.178	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.194	.175	.157	.166	.150	.135	.114	.103	.094	.065	.060	.054	.021	.019	.018	
2.0	.184	.150	.122	.157	.129	.106	.108	.089	.074	.062	.052	.043	.020	.017	.014	
3.0	.175	.132	.098	.150	.114	.085	.103	.079	.060	.059	.046	.035	.019	.015	.012	
4.0	.167	.118	.081	.143	.102	.071	.098	.071	.050	.057	.042	.029	.018	.014	.010	
5.0	.160	.108	.070	.137	.093	.060	.094	.065	.043	.055	.038	.025	.018	.012	.008	
6.0	.153	.099	.061	.131	.086	.053	.091	.060	.037	.053	.035	.022	.017	.012	.007	
7.0	.147	.092	.054	.126	.080	.047	.087	.056	.033	.051	.033	.020	.016	.011	.007	
8.0	.141	.086	.049	.121	.075	.043	.084	.053	.030	.049	.031	.018	.016	.010	.006	
9.0	.135	.082	.045	.117	.071	.039	.081	.050	.028	.047	.029	.017	.015	.010	.006	
10.0	.130	.077	.042	.112	.067	.037	.078	.047	.026	.045	.028	.016	.015	.009	.005	

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-06

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:218.6V I:0.7045A P:148.9W PF:0.967 Freq:49.99Hz 实检光通:29814.7x1 lm												
灯具名称:			灯具类型:			灯具重量:						
灯具规格:			外型尺寸:			测试编号:						
制造厂商: EVERFINE			发光口面:			遮光角:						
反射比:	天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
	墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
	工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
房间尺寸		交叉(Viewed crosswise)					向前(Viewed endwise)					
x = 2H y = 2H	2H	15.0	16.4	15.3	16.6	16.8	14.9	16.2	15.2	16.4	16.7	
	3H	15.4	16.6	15.7	16.8	17.1	15.2	16.4	15.5	16.7	17.0	
	4H	15.4	16.6	15.8	16.9	17.2	15.3	16.4	15.6	16.7	17.0	
	6H	15.5	16.5	15.8	16.8	17.1	15.3	16.4	15.6	16.7	17.0	
	8H	15.4	16.4	15.8	16.8	17.1	15.3	16.3	15.6	16.6	16.9	
	12H	15.4	16.4	15.8	16.7	17.0	15.2	16.2	15.6	16.5	16.9	
	4H	2H	15.2	16.3	15.5	16.6	16.9	15.0	16.2	15.4	16.4	16.7
		3H	15.6	16.6	16.0	16.9	17.2	15.5	16.5	15.9	16.8	17.1
		4H	15.7	16.6	16.1	17.0	17.4	15.6	16.5	16.0	16.9	17.2
		6H	15.8	16.6	16.2	17.0	17.4	15.7	16.4	16.1	16.8	17.2
		8H	15.8	16.5	16.2	16.9	17.3	15.6	16.4	16.1	16.8	17.2
4H	2H	15.2	16.4	16.2	16.8	17.3	15.6	16.3	16.1	16.7	17.1	
	3H	15.6	16.4	16.3	16.9	17.3	15.7	16.3	16.2	16.7	17.2	
	4H	15.8	16.3	16.3	16.8	17.3	15.7	16.2	16.2	16.7	17.2	
	6H	15.8	16.3	16.3	16.7	17.3	15.7	16.1	16.2	16.6	17.1	
	12H	15.8	16.3	16.3	16.7	17.3	15.7	16.1	16.2	16.6	17.1	
	12H	4H	15.7	16.3	16.1	16.8	17.2	15.6	16.2	16.0	16.6	17.1
		6H	15.8	16.3	16.3	16.8	17.3	15.7	16.2	16.2	16.6	17.1
		8H	15.8	16.2	16.3	16.7	17.3	15.7	16.1	16.2	16.6	17.1
	不同间隔布灯时,观察者位置引起的UGR变化:											
S = 1.0H		+ 0.8 / - 1.0					+ 0.9 / - 1.0					
1.5H		+ 0.5 / - 0.5					+ 0.4 / - 0.5					
2.0H		+ 1.8 / - 1.8					+ 1.6 / - 1.7					

依据CIE Pub.117计算, 29815lm光源光通表格中的数据需要进行修正(8log(F/F0) = 11.8).
出光口面积: 0.1 m2

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-06

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:218.6V I:0.7045A P:148.9W PF:0.967 Freq:49.99Hz 实检光通:29814.7x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	64	54	48	64	54	48	62	53	48	42
0.80	75	65	58	74	64	58	72	63	58	52
1.00	83	74	67	82	73	67	79	74	66	60
1.25	89	81	75	88	80	74	85	78	73	67
1.50	94	86	80	92	85	80	89	83	78	72
2.00	100	93	88	98	91	87	94	89	85	78
2.50	103	96	92	101	95	91	97	92	88	80
3.00	105	100	95	103	98	94	99	95	92	84
4.00	109	104	100	106	102	99	102	98	96	87
5.00	110	106	103	108	104	101	103	100	98	89
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHR _{NOM} = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-06

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:218.6V I:0.7045A P:148.9W PF:0.967 Freq:49.99Hz 实检光通:29814.7x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

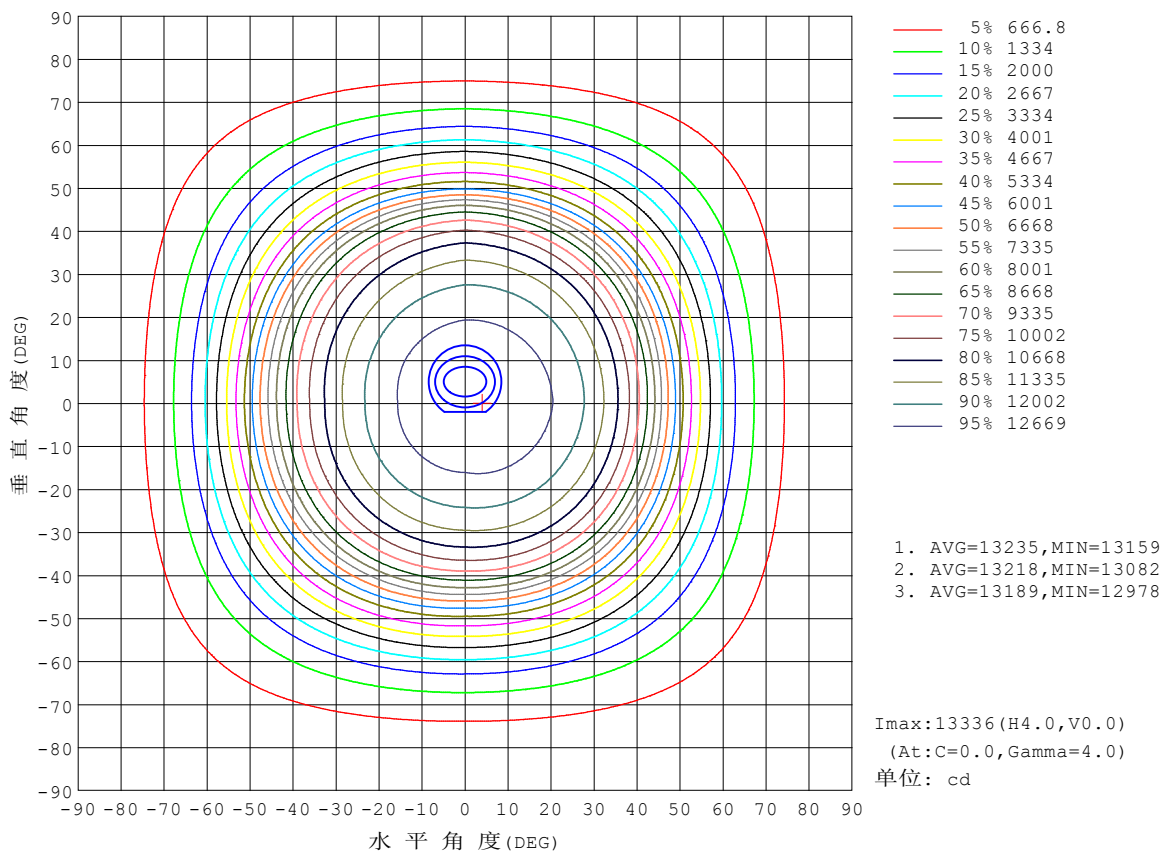


C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-06

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:218.6V I:0.7045A P:148.9W PF:0.967 Freq:49.99Hz 实检光通:29814.7x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

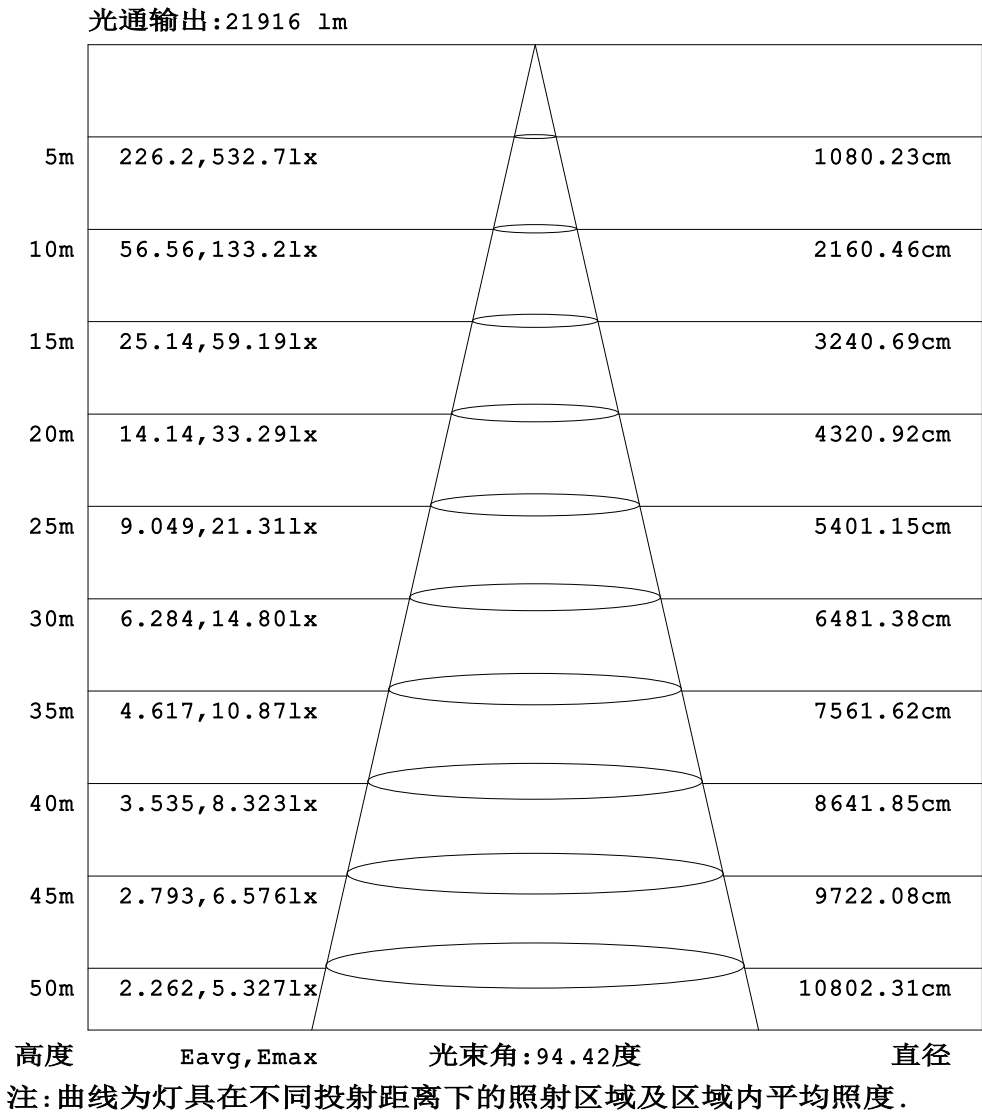


C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-06

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:218.6V I:0.7045A P:148.9W PF:0.967 Freq:49.99Hz 实检光通:29814.7x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

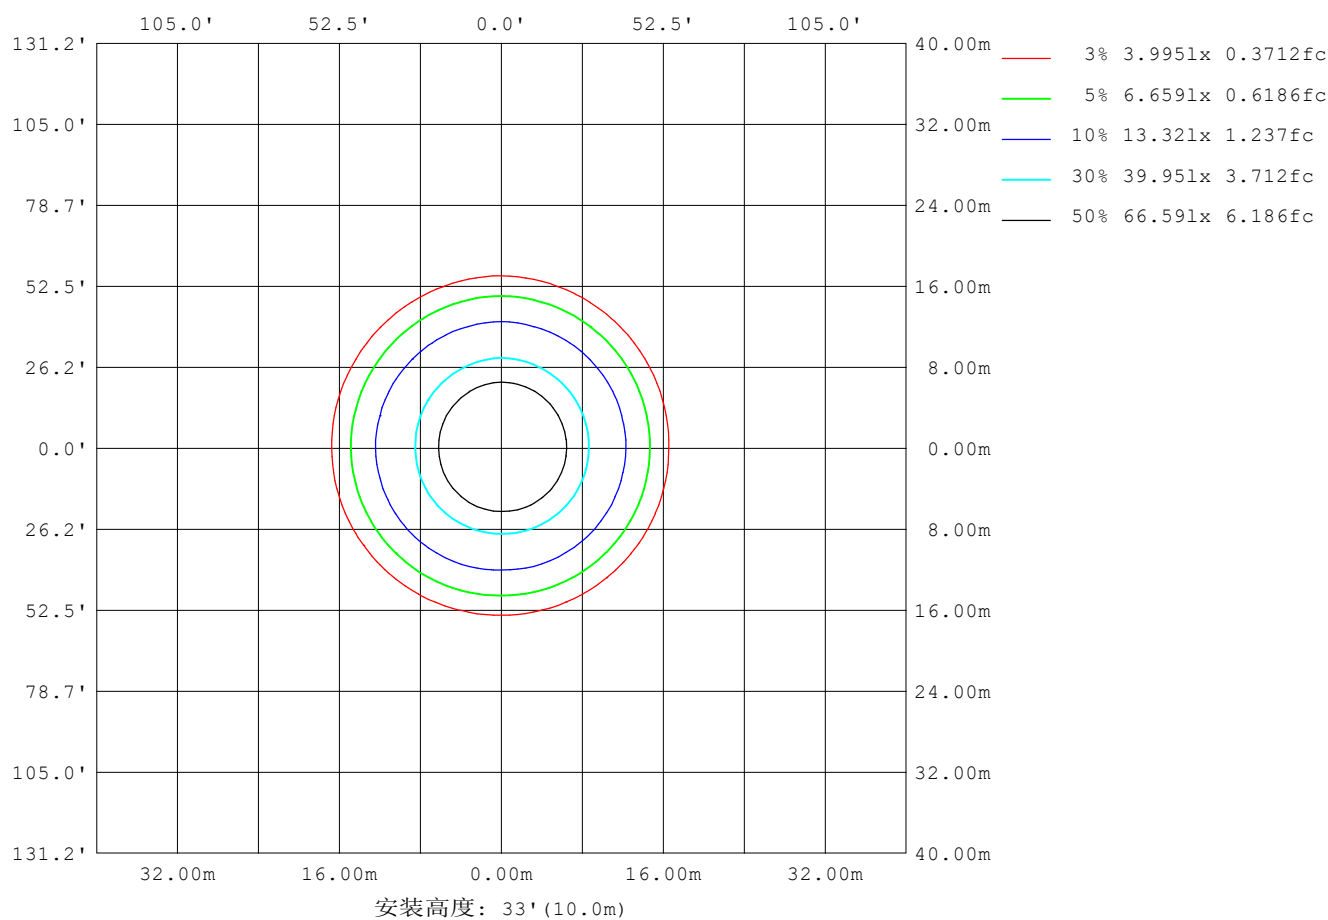

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-06

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:218.6V I:0.7045A P:148.9W PF:0.967 Freq:49.99Hz 实检光通:29814.7×1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	40138
L横 (75) av	24145
L横 (85) av	10289
L纵 (65) av	41729
L纵 (75) av	23978
L纵 (85) av	10054
L45 (65) av	41211
L45 (75) av	24069
L45 (85) av	10010

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-06

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

平面照度曲线

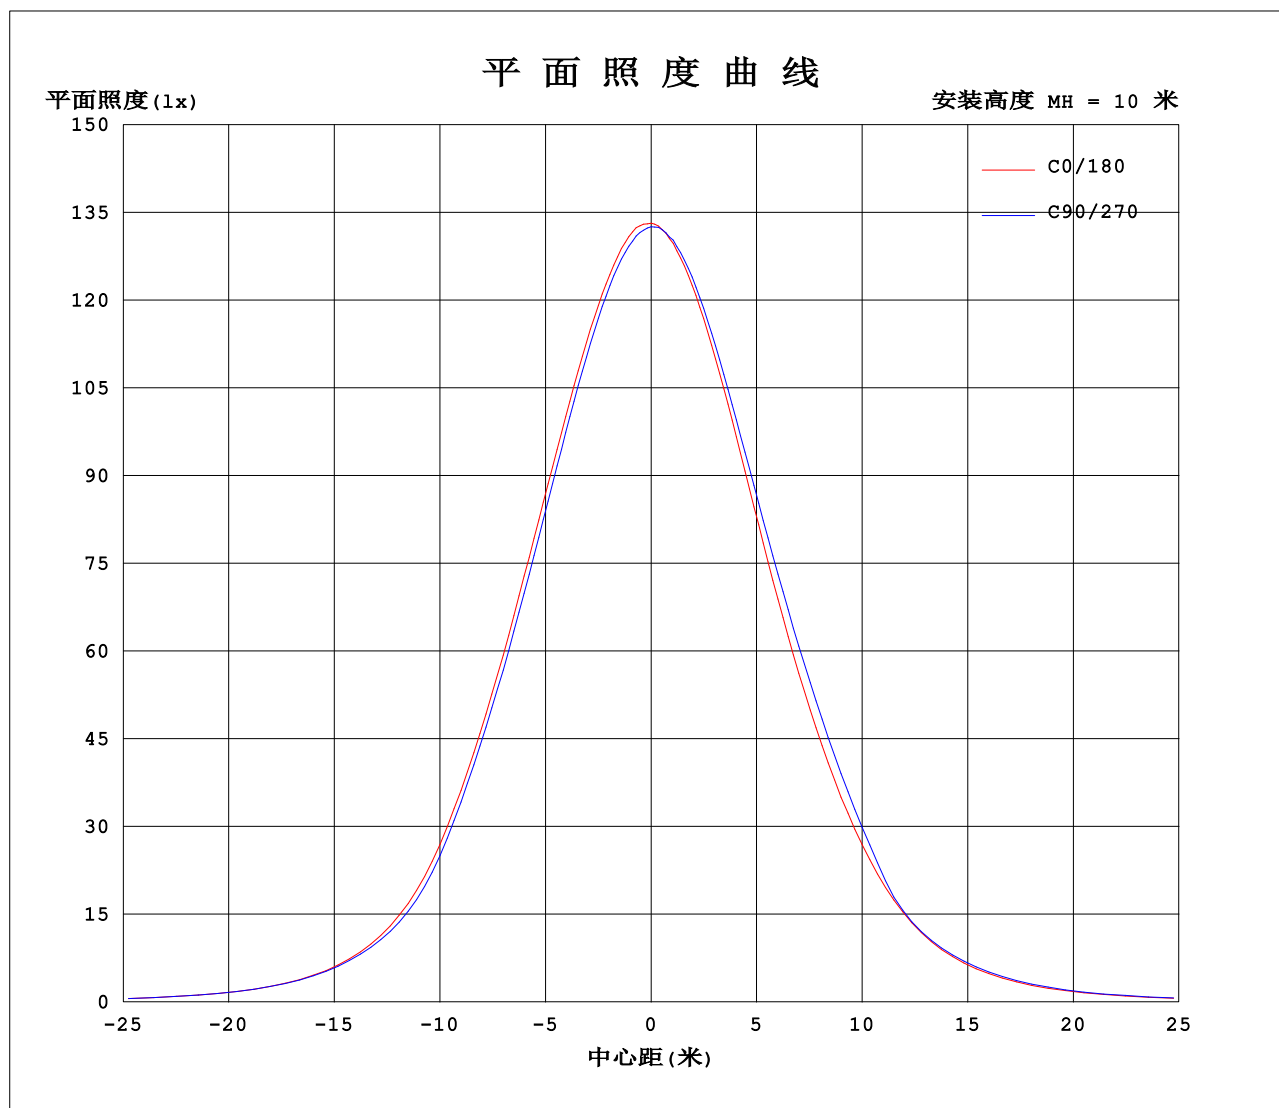

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-06

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:218.6V I:0.7045A P:148.9W PF:0.967 Freq:49.99Hz 实检光通:29814.7×1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

表--1				单位: ×10cd															
γ (DEG)	C (DEG)	0	90	180	270														
	0	1332	1326	1332	1326														
	5	1332	1316	1321	1323														
	10	1319	1301	1301	1314														
	15	1300	1274	1272	1293														
	20	1270	1238	1232	1262														
	25	1230	1191	1179	1226														
	30	1171	1126	1110	1175														
	35	1080	1033	1023	1107														
	40	949	903	909	1007														
	45	763	708	762	846														
	50	561	517	582	591														
	55	392	379	414	428														
	60	259	258	277	297														
	65	164	165	175	188														
	70	103	102	107	113														
	75	61.3	58.0	63.6	66.1														
	80	28.6	25.7	31.8	31.9														
	85	10.8	10.5	7.13	7.03														
	90	9.46	9.27	5.61	5.50														
	95	8.70	8.53	6.01	5.87														
	100	8.36	8.15	6.60	6.44														
	105	8.28	8.28	7.32	7.15														
	110	8.58	8.70	8.17	7.98														
	115	9.12	9.30	9.11	8.88														
	120	9.84	10.0	10.1	9.83														
	125	10.7	10.9	11.2	10.8														
	130	11.6	11.9	12.3	11.9														
	135	12.6	13.0	13.4	13.0														
	140	13.7	14.1	14.5	14.0														
	145	14.7	15.1	15.5	15.0														
	150	15.8	16.1	16.5	16.0														
	155	16.8	17.0	17.5	17.0														
	160	17.7	17.9	18.4	17.9														
	165	18.6	18.7	19.2	18.7														
	170	19.3	19.4	19.8	19.4														
	175	19.9	19.9	20.2	19.9														
	180	20.2	20.1	20.3	20.0														

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-06

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	13317	13256	13317	13256
3.0	13328	13212	13262	13263
6.0	13305	13140	13186	13241
9.0	13224	13035	13060	13160
12.0	13122	12895	12907	13063
15.0	12996	12741	12723	12929
18.0	12833	12539	12494	12762
21.0	12630	12303	12232	12555
24.0	12395	12026	11911	12334
27.0	12091	11670	11535	12054
30.0	11706	11262	11103	11750
33.0	11202	10756	10597	11376
36.0	10573	10118	10028	10907
39.0	9788	9338	9347	10314
42.0	8817	8340	8547	9525
45.0	7625	7081	7625	8462
48.0	6386	5863	6548	6923
51.0	5231	4870	5446	5523
54.0	4237	4052	4441	4557
57.0	3351	3277	3552	3737
60.0	2592	2579	2769	2966
63.0	1977	1985	2110	2277
66.0	1492	1499	1587	1710
69.0	1128	1122	1178	1259
72.0	850.5	829.0	874.3	921.0
75.0	613.4	580.3	636.4	660.9
78.0	418.5	385.5	430.8	442.4
81.0	223.7	193.8	257.3	268.0
84.0	114.7	112.7	106.1	102.7
87.0	101.2	98.99	56.20	55.05
90.0	94.65	92.72	56.11	54.96
93.0	89.50	87.75	58.26	56.95
96.0	86.29	84.32	61.14	59.66
99.0	84.41	81.89	64.78	63.22
102.0	82.63	81.45	68.56	67.02
105.0	82.80	82.85	73.18	71.49
108.0	84.24	85.09	78.29	76.41
111.0	86.72	88.07	83.57	81.61
114.0	89.94	91.58	89.18	86.91
117.0	93.85	95.77	94.97	92.47
120.0	98.35	100.5	101.0	98.26
123.0	103.3	105.7	107.3	104.2
126.0	108.6	111.2	113.8	110.4
129.0	114.3	117.1	120.4	116.8
132.0	120.2	123.2	127.3	123.4
135.0	126.3	129.6	134.0	130.0
138.0	132.6	136.3	140.5	136.2
141.0	138.9	142.7	147.0	142.3
144.0	145.2	148.8	153.0	148.2
147.0	151.6	154.9	159.0	154.0
150.0	157.7	160.8	164.9	159.8
153.0	163.8	166.6	170.8	165.8
156.0	169.7	172.1	176.5	171.6
159.0	175.3	177.5	181.8	177.2
162.0	181.0	182.6	187.1	182.5
165.0	185.9	187.3	191.8	187.5
168.0	190.4	191.4	195.9	191.8
171.0	194.1	194.8	199.1	195.2
174.0	197.6	197.9	201.5	198.0
177.0	200.4	199.9	202.3	199.4
180.0	201.8	200.7	202.5	200.0

C角度范围: 0度 - 360度

C角度间隔: 90.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: Jason

测试日期: 2025-04-06

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411

环境湿度: 65.0%

测试距离: 9.250米 [K=1.0000]

备注: