


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:218.47V I:0.9351A P:196.29W PF:0.9608 Freq:49.99Hz Lamp Flux:38844x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 197.89 lm/W			
MODEL		I _{max} (cd)	17966	S/MH (C0/180)	1.27
NOMINAL POWER (W)	200	LOR (%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	38844	η UP, DN (C0-180)	1.2, 47.9
NOMINAL FLUX (lm)	38844	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.2, 49.7
LAMPS INSIDE	1	η up (%)	2.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	220	η down (%)	97.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

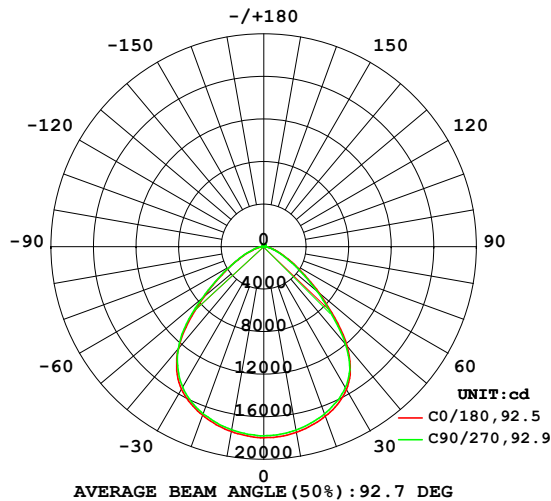

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

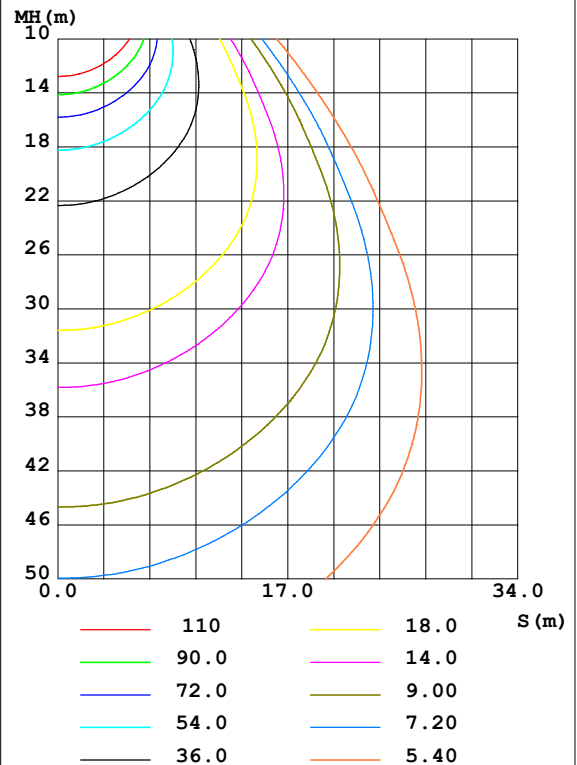

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-07-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1772	1763	1750	1740	1765	1753	1747	1745	0- 10	1688	1688	4.35,4.35
20	1696	1686	1674	1661	1686	1673	1671	1666	10- 20	4862	6550	16.9,16.9
30	1554	1550	1534	1521	1549	1530	1527	1526	20- 30	7451	14001	36,36
40	1219	1237	1195	1207	1249	1234	1253	1243	30- 40	8776	22776	58.6,58.6
50	686.3	650.7	658.8	657.9	732.9	722.5	757.5	722.6	40- 50	7431	30208	77.8,77.8
60	323.6	277.4	304.8	313.0	348.7	320.7	356.6	344.6	50- 60	4378	34585	89,89
70	138.5	117.2	125.9	129.5	142.8	128.2	152.3	145.3	60- 70	2145	36730	94.6,94.6
80	48.44	44.50	43.10	44.71	45.34	48.77	55.76	52.95	70- 80	914.0	37644	96.9,96.9
90	12.41	12.02	12.03	12.13	7.897	8.525	9.844	8.779	80- 90	282.2	37927	97.6,97.6
100	10.77	10.57	10.62	10.64	8.673	8.561	8.514	8.558	90-100	104.5	38031	97.9,97.9
110	11.23	11.09	11.17	11.15	10.82	10.67	10.62	10.63	100-110	107.6	38139	98.2,98.2
120	12.98	12.85	12.90	12.87	13.32	13.17	13.13	13.10	110-120	118.3	38257	98.5,98.5
130	15.45	15.29	15.31	15.28	16.12	15.97	15.91	15.85	120-130	128.1	38385	98.8,98.8
140	18.34	18.15	18.19	18.13	19.19	18.96	18.88	18.75	130-140	132.1	38517	99.2,99.2
150	21.23	21.08	21.03	20.89	21.99	21.69	21.60	21.41	140-150	125.2	38642	99.5,99.5
160	23.96	23.85	23.71	23.55	24.74	24.42	24.30	24.08	150-160	104.8	38747	99.8,99.8
170	26.24	26.14	25.97	25.79	26.89	26.59	26.42	26.15	160-170	71.23	38819	99.9,99.9
180	27.45	27.40	27.12	26.92	27.62	27.28	27.20	26.86	170-180	25.53	38844	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 26861 lm

%lum = 69.2%

%lamp = 69.2%

Conical surface Flux(120deg): 34585 lm

%lum = 89.0%


%lamp = 89.0%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:218.47V I:0.9351A P:196.29W PF:0.9608 Freq:49.99Hz Lamp Flux:38844x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

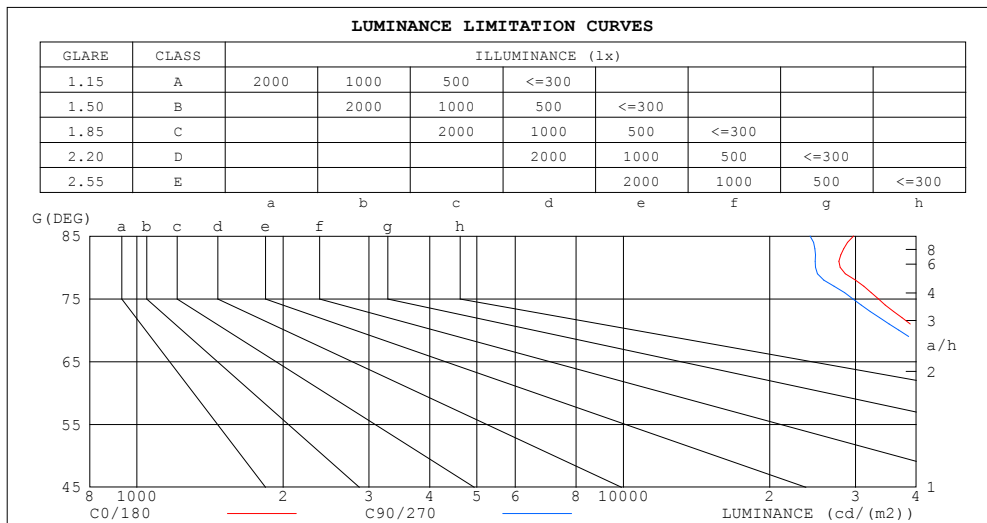


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-07-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:218.47V I:0.9351A P:196.29W PF:0.9608 Freq:49.99Hz Lamp Flux:38844x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.06	1.03	.00	1.04	1.01	.98	.99	.97	.95	.95	.93	.91	.91	.90	.88	.86
2.0	.95	.90	.85	.93	.88	.84	.89	.85	.81	.86	.82	.79	.83	.80	.77	.75
3.0	.85	.78	.73	.84	.77	.72	.81	.75	.71	.78	.73	.69	.75	.71	.68	.66
4.0	.77	.69	.64	.76	.68	.63	.73	.67	.62	.70	.65	.61	.68	.64	.60	.58
5.0	.70	.62	.56	.68	.61	.56	.66	.60	.55	.64	.58	.54	.62	.57	.53	.51
6.0	.63	.55	.50	.62	.55	.49	.60	.54	.49	.59	.53	.48	.57	.52	.48	.46
7.0	.58	.50	.44	.57	.50	.44	.55	.49	.44	.54	.48	.43	.52	.47	.43	.41
8.0	.53	.45	.40	.52	.45	.40	.51	.44	.40	.50	.44	.39	.48	.43	.39	.37
9.0	.49	.41	.36	.48	.41	.36	.47	.40	.36	.46	.40	.36	.45	.39	.35	.34
10.0	.45	.38	.33	.45	.38	.33	.44	.37	.33	.43	.37	.33	.42	.36	.32	.31

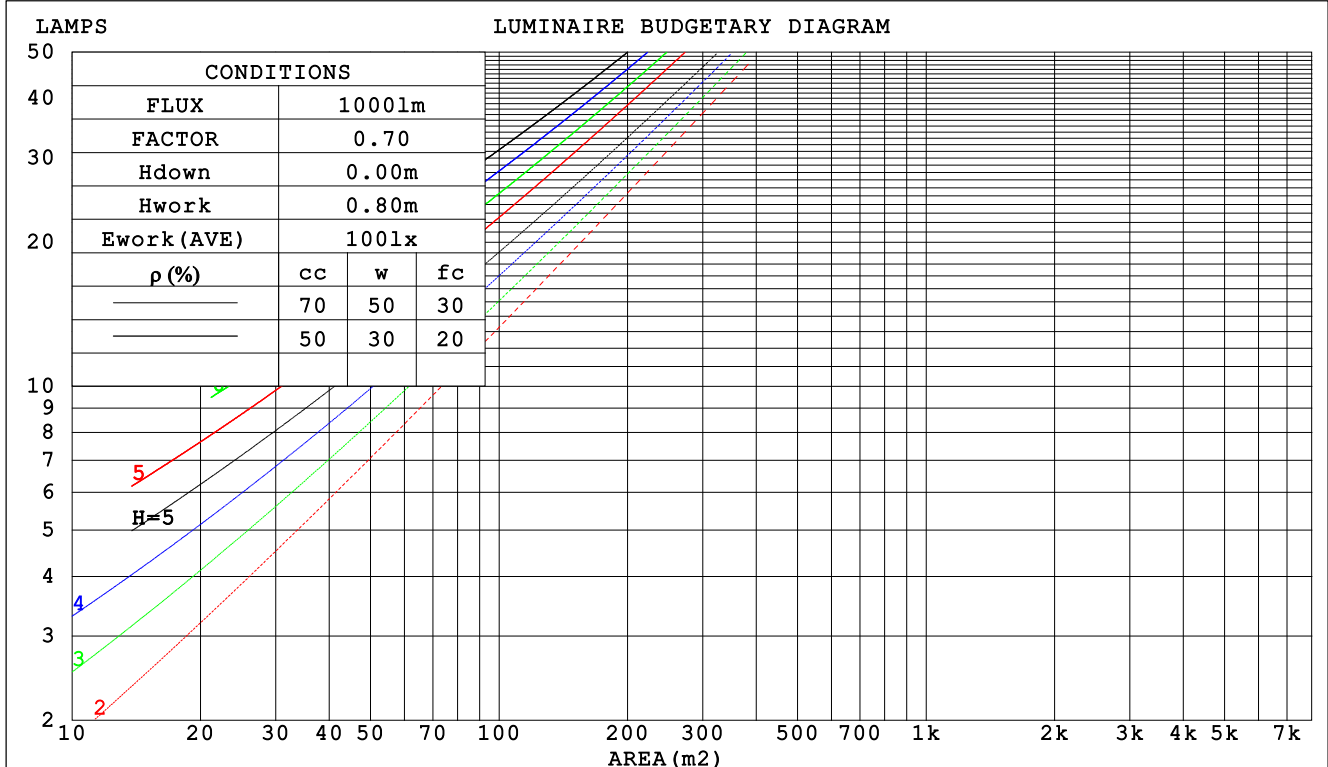

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:218.47V I:0.9351A P:196.29W PF:0.9608 Freq:49.99Hz Lamp Flux:38844x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.: EVERFINE		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.250	.142	.045	.242	.138	.044	.228	.131	.042	.215	.124	.040	.202	.117	.038	
2.0	.240	.132	.040	.234	.129	.040	.221	.123	.038	.210	.118	.037	.199	.113	.036	
3.0	.228	.121	.036	.222	.119	.036	.211	.114	.035	.201	.110	.034	.191	.106	.033	
4.0	.214	.111	.033	.209	.109	.032	.199	.106	.032	.190	.102	.031	.182	.099	.030	
5.0	.201	.103	.030	.197	.101	.029	.188	.098	.029	.180	.095	.028	.173	.092	.028	
6.0	.190	.095	.027	.185	.094	.027	.178	.091	.026	.170	.089	.026	.164	.086	.026	
7.0	.179	.088	.025	.175	.087	.025	.168	.085	.024	.161	.083	.024	.155	.081	.024	
8.0	.169	.082	.023	.165	.081	.023	.159	.079	.023	.153	.078	.022	.147	.076	.022	
9.0	.159	.077	.022	.156	.076	.021	.151	.075	.021	.145	.073	.021	.140	.071	.021	
10.0	.151	.072	.020	.148	.072	.020	.143	.070	.020	.138	.069	.020	.134	.067	.019	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.178	.178	.178	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.194	.175	.157	.166	.150	.135	.114	.103	.094	.065	.060	.054	.021	.019	.018	
2.0	.184	.150	.122	.157	.129	.106	.108	.090	.074	.062	.052	.043	.020	.017	.014	
3.0	.175	.132	.099	.150	.114	.086	.103	.079	.060	.059	.046	.035	.019	.015	.012	
4.0	.167	.119	.082	.143	.103	.071	.098	.071	.050	.057	.042	.030	.018	.014	.010	
5.0	.159	.108	.070	.137	.093	.061	.094	.065	.043	.055	.038	.025	.018	.013	.008	
6.0	.153	.099	.061	.131	.086	.053	.091	.060	.038	.053	.035	.022	.017	.012	.007	
7.0	.146	.092	.055	.126	.080	.048	.087	.056	.034	.051	.033	.020	.016	.011	.007	
8.0	.141	.087	.050	.121	.075	.043	.084	.053	.031	.049	.031	.018	.016	.010	.006	
9.0	.135	.082	.046	.116	.071	.040	.081	.050	.028	.047	.029	.017	.015	.010	.006	
10.0	.130	.077	.042	.112	.067	.037	.078	.047	.026	.045	.028	.016	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:218.47V I:0.9351A P:196.29W PF:0.9608 Freq:49.99Hz Lamp Flux:38844x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.: EVERFINE			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.7	16.0	14.9	16.2	16.4	14.5	15.8	14.8	16.0	16.3
3H	15.0	16.2	15.3	16.5	16.7	14.8	16.0	15.1	16.3	16.5
4H	15.1	16.3	15.5	16.5	16.8	14.9	16.0	15.2	16.3	16.6
6H	15.2	16.2	15.5	16.5	16.9	14.9	16.0	15.3	16.3	16.6
8H	15.2	16.2	15.6	16.5	16.9	14.9	15.9	15.3	16.3	16.6
12H	15.2	16.2	15.6	16.5	16.9	14.9	15.9	15.3	16.2	16.6
4H 2H	14.7	15.8	15.0	16.1	16.4	14.5	15.7	14.9	16.0	16.2
3H	15.2	16.1	15.6	16.5	16.8	15.0	16.0	15.4	16.3	16.6
4H	15.4	16.3	15.8	16.6	17.0	15.1	16.0	15.6	16.4	16.8
6H	15.5	16.3	15.9	16.7	17.1	15.3	16.0	15.7	16.4	16.8
8H	15.6	16.3	16.0	16.7	17.1	15.3	16.0	15.7	16.4	16.8
12H	15.6	16.3	16.1	16.7	17.1	15.3	16.0	15.8	16.4	16.9
8H 4H	15.4	16.1	15.8	16.5	16.9	15.2	15.9	15.6	16.3	16.7
6H	15.6	16.2	16.1	16.6	17.1	15.3	15.9	15.8	16.4	16.8
8H	15.7	16.2	16.2	16.7	17.2	15.4	15.9	15.9	16.4	16.9
12H	15.8	16.2	16.3	16.7	17.2	15.5	15.9	16.0	16.4	17.0
12H 4H	15.3	16.0	15.8	16.4	16.9	15.1	15.8	15.6	16.2	16.6
6H	15.6	16.1	16.1	16.6	17.1	15.3	15.8	15.8	16.3	16.8
8H	15.7	16.1	16.2	16.6	17.2	15.4	15.9	16.0	16.4	16.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.9 / - 1.0					+ 1.0 / - 1.2				
1.5H	+ 0.6 / - 0.7					+ 0.7 / - 0.8				
2.0H	+ 1.9 / - 1.7					+ 1.9 / - 1.8				

CIE Pub.117, 38844 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 12.7)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:218.47V I:0.9351A P:196.29W PF:0.9608 Freq:49.99Hz Lamp Flux:38844x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	65	55	49	65	55	49	63	55	49	43
0.80	75	66	59	74	65	59	73	64	59	53
1.00	83	74	68	82	74	68	80	74	67	61
1.25	90	81	76	88	81	75	86	79	74	68
1.50	94	86	81	93	85	80	90	83	79	72
2.00	100	93	88	98	92	87	95	89	85	78
2.50	103	97	92	101	95	91	97	92	89	81
3.00	106	100	96	103	98	94	99	95	92	84
4.00	109	104	100	106	102	99	102	98	96	87
5.00	110	107	103	108	104	101	103	100	98	89
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-07-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.47V I:0.9351A P:196.29W PF:0.9608 Freq:49.99Hz Lamp Flux:38844x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

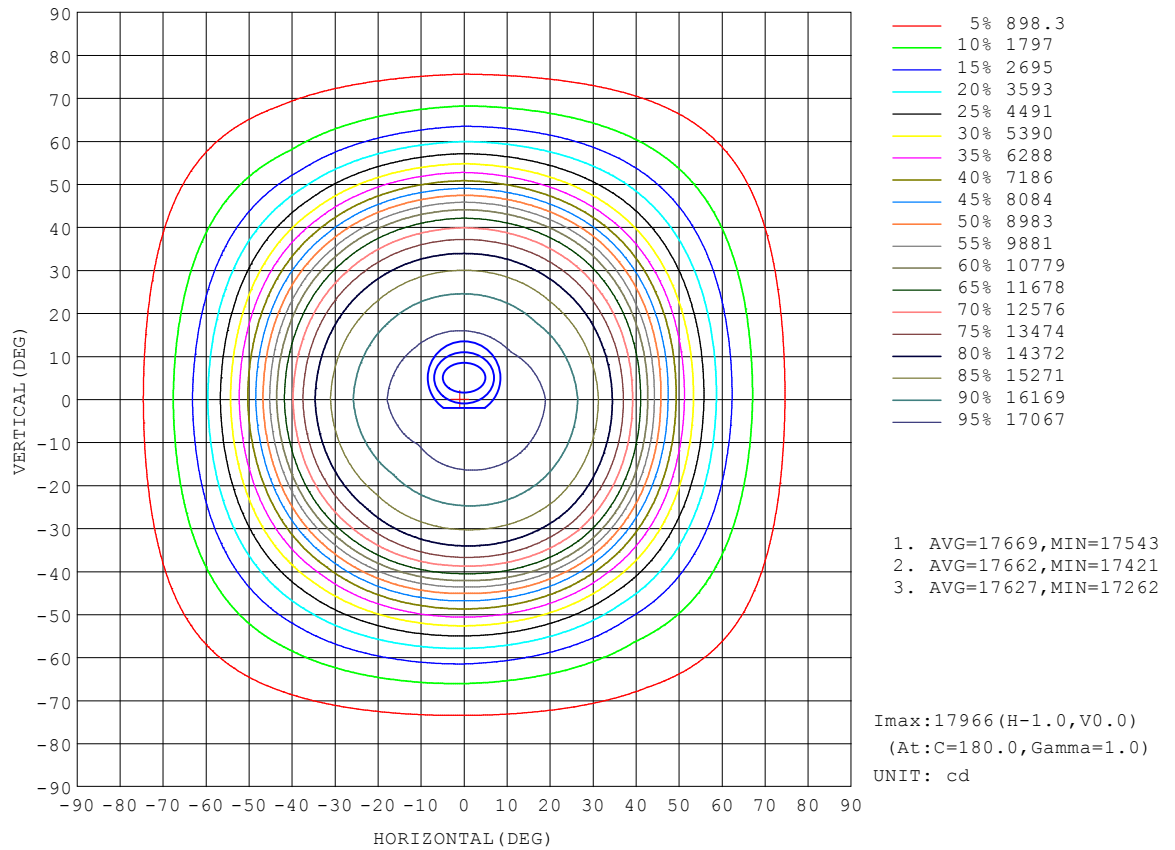


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.47V I:0.9351A P:196.29W PF:0.9608 Freq:49.99Hz Lamp Flux:38844x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

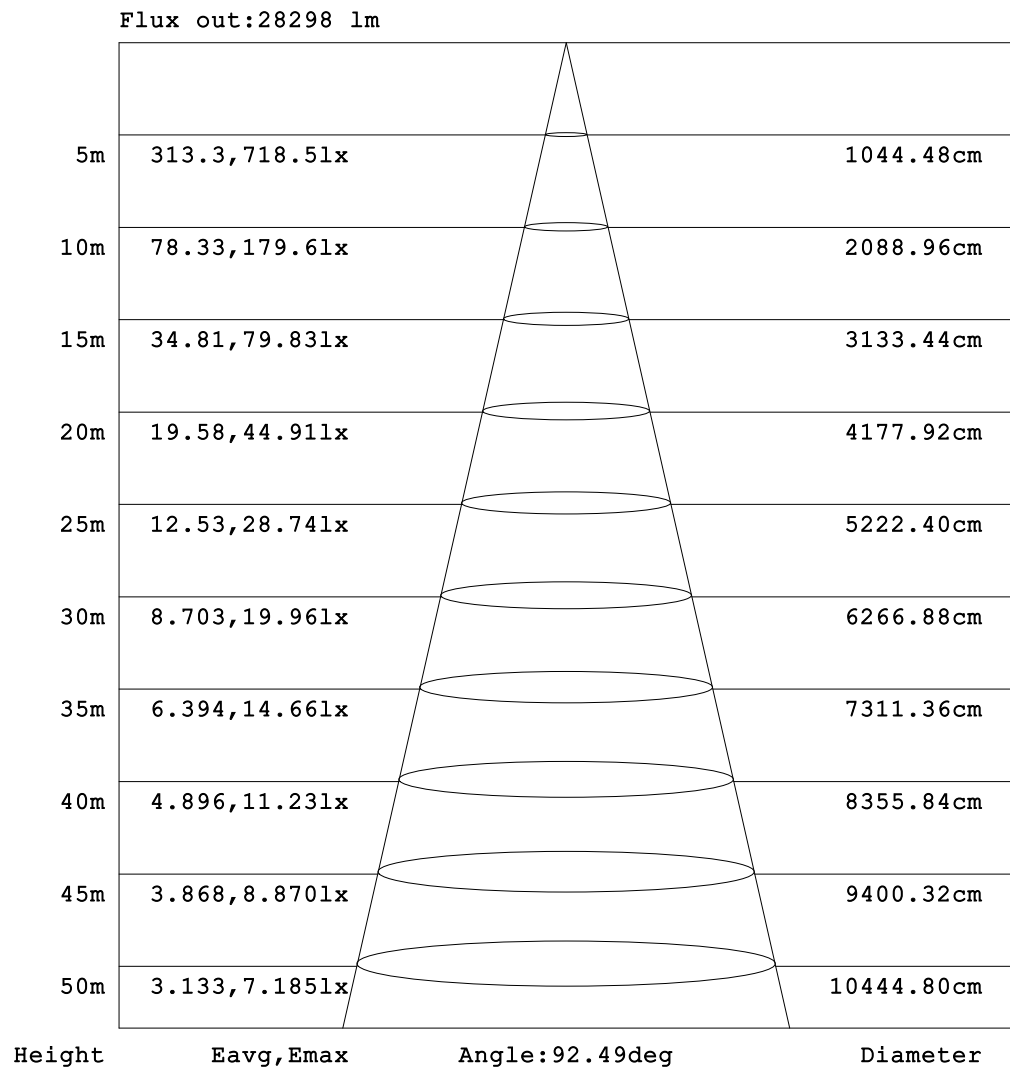


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Jason
 Test Date: 2025-07-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.250m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:218.47V I:0.9351A P:196.29W PF:0.9608 Freq:49.99Hz Lamp Flux:38844x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

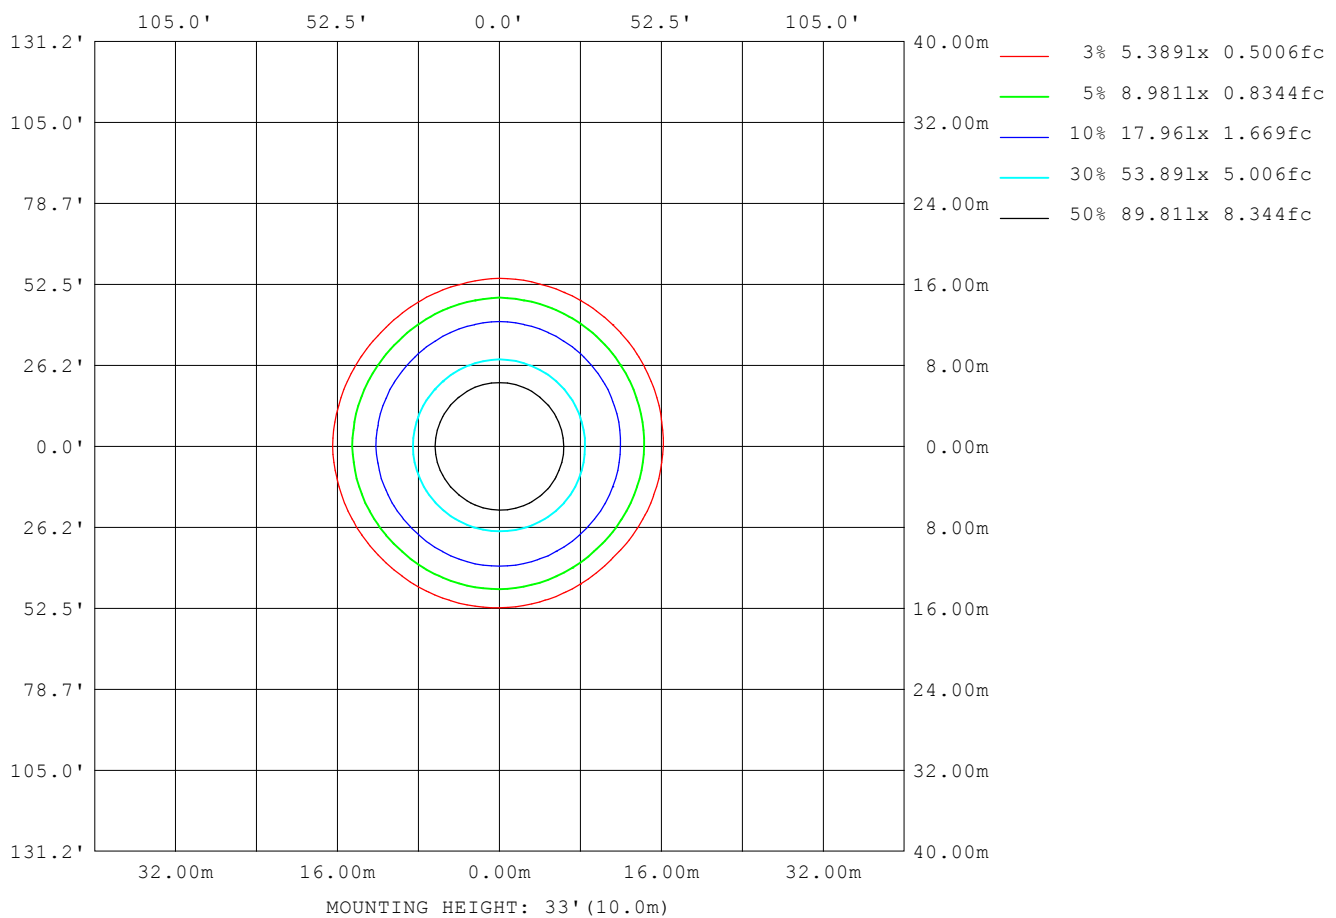

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-07-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:218.47V I:0.9351A P:196.29W PF:0.9608 Freq:49.99Hz Lamp Flux:38844x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	52609
L_0~180 (75) av	33300
L_0~180 (85) av	28354
L_90~270 (65) av	51623
L_90~270 (75) av	33165
L_90~270 (85) av	28459
L_45 (65) av	47836
L_45 (75) av	31980
L_45 (85) av	28468

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

Planar Illuminance Curve

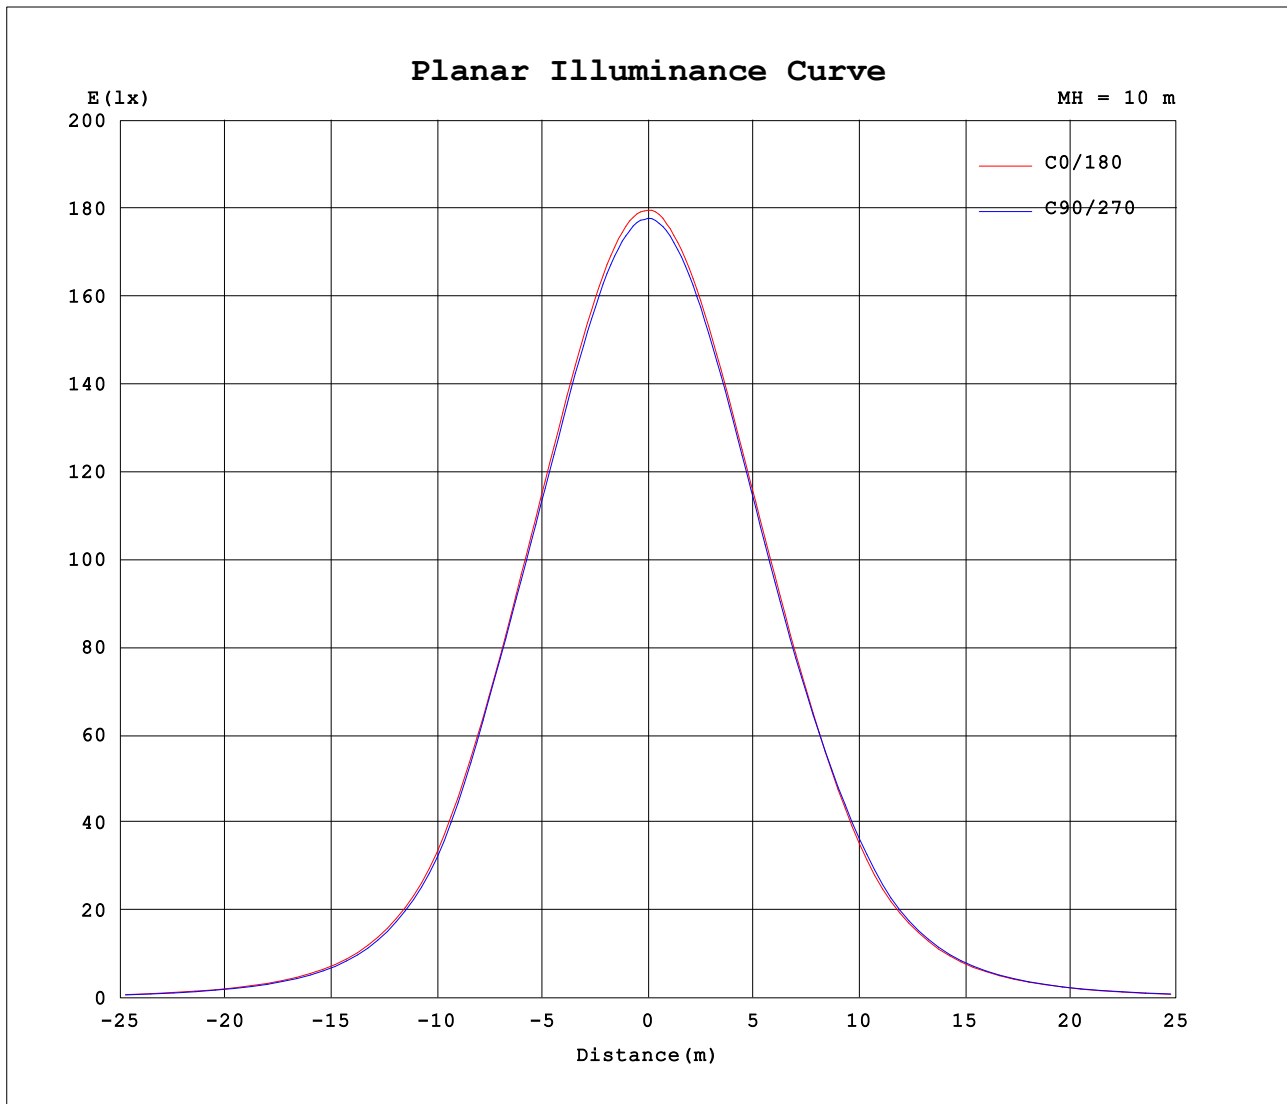

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-07-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.47V I:0.9351A P:196.29W PF:0.9608 Freq:49.99Hz Lamp Flux:38844x1 lm									
NAME:					TYPE:			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.: EVERFINE					SUR.:			Shielding Angle:	

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1796	1787	1778	1770	1796	1787	1778	1770										
5	1792	1782	1770	1763	1786	1776	1770	1764										
10	1772	1763	1750	1740	1765	1753	1747	1745										
15	1740	1731	1718	1706	1732	1720	1714	1710										
20	1696	1686	1674	1661	1686	1673	1671	1666										
25	1638	1629	1613	1603	1628	1614	1610	1608										
30	1554	1550	1534	1521	1549	1530	1527	1526										
35	1420	1429	1411	1396	1428	1408	1409	1408										
40	1219	1237	1195	1207	1249	1234	1253	1243										
45	940	940	905	928	1000	996	1032	1007										
50	686	651	659	658	733	723	757	723										
55	475	432	449	462	511	491	528	499										
60	324	277	305	313	349	321	357	345										
65	215	176	199	204	230	200	237	229										
70	138	117	126	130	143	128	152	145										
75	86.5	76.7	76.7	80.1	85.9	83.5	95.0	90.8										
80	48.4	44.5	43.1	44.7	45.3	48.8	55.8	52.9										
85	25.9	23.0	21.1	23.1	23.5	25.8	28.5	27.4										
90	12.4	12.0	12.0	12.1	7.90	8.52	9.84	8.78										
95	11.3	11.0	11.1	11.1	7.85	7.74	7.72	7.76										
100	10.8	10.6	10.6	10.6	8.67	8.56	8.51	8.56										
105	10.8	10.6	10.7	10.7	9.69	9.56	9.51	9.54										
110	11.2	11.1	11.2	11.1	10.8	10.7	10.6	10.6										
115	12.0	11.9	11.9	11.9	12.1	11.9	11.8	11.8										
120	13.0	12.9	12.9	12.9	13.3	13.2	13.1	13.1										
125	14.1	14.0	14.0	14.0	14.7	14.5	14.5	14.4										
130	15.4	15.3	15.3	15.3	16.1	16.0	15.9	15.9										
135	16.9	16.7	16.7	16.7	17.7	17.5	17.4	17.3										
140	18.3	18.1	18.2	18.1	19.2	19.0	18.9	18.7										
145	19.8	19.6	19.6	19.5	20.6	20.3	20.3	20.1										
150	21.2	21.1	21.0	20.9	22.0	21.7	21.6	21.4										
155	22.6	22.5	22.4	22.3	23.4	23.1	23.0	22.8										
160	24.0	23.8	23.7	23.6	24.7	24.4	24.3	24.1										
165	25.2	25.1	24.9	24.8	25.9	25.6	25.5	25.2										
170	26.2	26.1	26.0	25.8	26.9	26.6	26.4	26.1										
175	27.1	27.0	26.8	26.6	27.5	27.1	27.0	26.7										
180	27.5	27.4	27.1	26.9	27.6	27.3	27.2	26.9										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:2025-07-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.250m [K=1.0000]
 Remarks: