

LED High Bay Light

INSTRUCTION MANUAL

WARNING

1. TO AVOID THE RISK OF FIRE, EXPLOSION OR ELECTRIC SHOCK:

This product should only be installed, inspected and maintained by a qualified electrician in accordance with all applicable electrical codes.

- Verify that the power cord is properly wired, following applicable electrical codes.
- The light source contained in this luminaire may only be replaced by the manufacturer or its service agent or similarly qualified personnel
- The external flexible cable or cord of this luminaire is not replaceable; if the cord is damaged, the luminaire should be destroyed

2. TO AVOID ELECTRIC SHOCKS:

- Ensure power is turned off before and during installation and maintenance.
- Luminaires must be powered by a wiring system that complies with local codes and is equipped with an equipment grounding conductor.

3. TO AVOID BURNING YOUR HANDS:


- Ensure that the fixtures are cooled for 30 minutes after power is removed before performing maintenance.

4. TO AVOID PRODUCT AGING:

- Do not operate at ambient temperatures higher than those indicated on the luminaire data sheet.
- Use the correct power cord as specified on the fixture data sheet.
- Avoid use in environments containing sulfur, chlorine or other halides, methyl or ethyl acetate, cyanoacrylates, glycol ethers, formaldehyde or butadiene.
- Installation of luminaires not less than 92cm from the ceiling.
- Make sure that the power supply voltage is within the voltage range specified in the specifications.
- Use only our replacement parts.
- It is recommended to install the cable only in a dry location.
- Install fixtures using only our or equivalent parts.


Pendant Eyebolt Mounting:

1

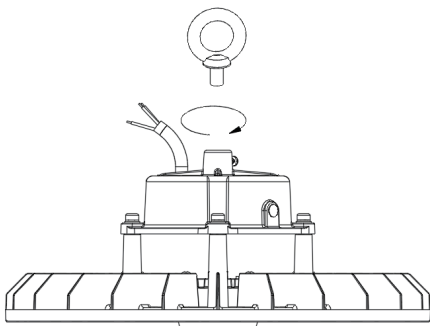

Pre-fasten the rings that need to be installed in the fixture, tighten the rings to install them on the fixture, and tighten the set screws to prevent the rings from

2

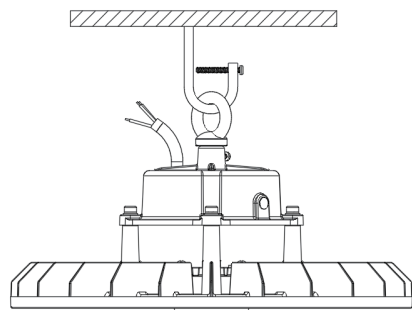


Use hanging chains, hooks, or other compliant mounting accessories to hang the fixture. Ensure that the mounting accessory is attached to a fixed hanging loop.

LED High Bay Light

INSTRUCTION MANUAL


Pole-pendant installation:

1

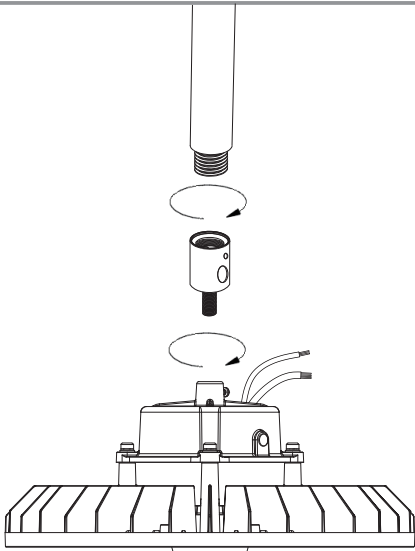

Installing the adaptor on the driver for 3/4" threaded conduit.

2

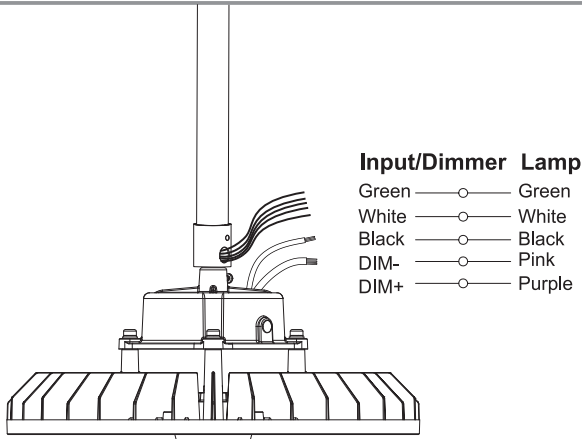

Input/Dimmer	Lamp
Green	Green
White	White
Black	Black
DIM-	Pink
DIM+	Purple

Connecting wires from conduit and the wires on the lamp, rotating the sleeve to make it fixed with lamp. Installation completed.

Refer to the wiring diagram for electrical connections and insulate and waterproof.

