


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:218.32V I:1.1370A P:242.29W PF:0.9761 Freq:49.99Hz Lamp Flux:37220x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 153.62 lm/W			
MODEL	HB02-240W	I _{max} (cd)	17246	S/MH (C0/180)	1.31
NOMINAL POWER(W)	240W	LOR(%)	100.0	S/MH (C90/270)	1.30
RATED VOLTAGE(V)		TOTAL FLUX(lm)	37220	η UP,DN(C0-180)	1.2,46.1
NOMINAL FLUX(lm)	37220	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.0,51.7
LAMPS INSIDE	1	η up (%)	2.2	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	0	η down (%)	97.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

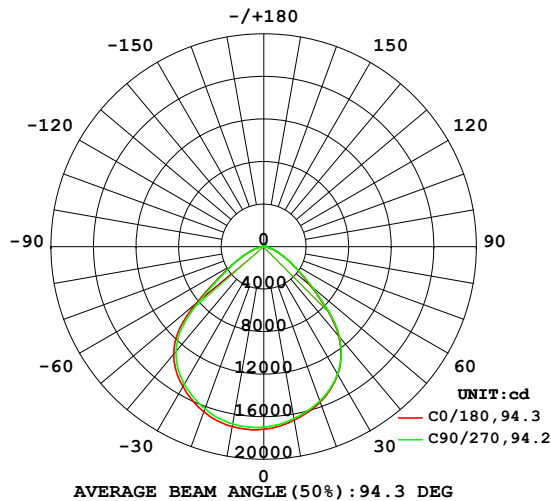

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

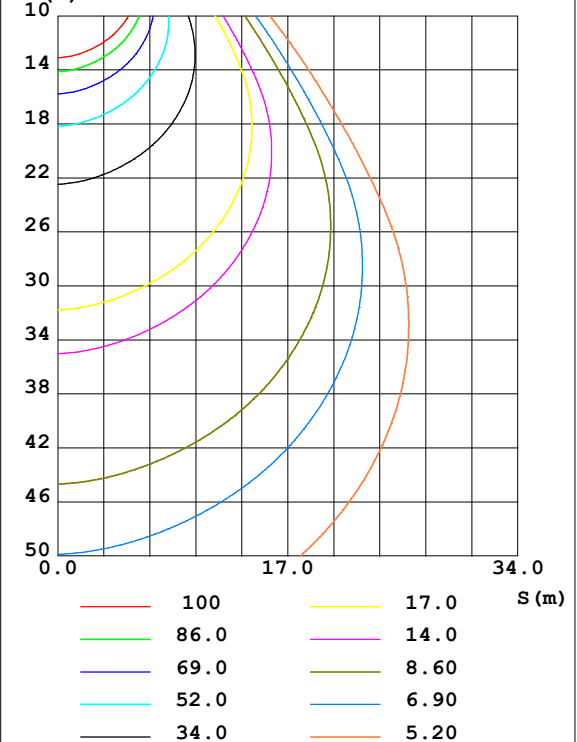

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-03-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1656	1639	1641	1663	1718	1713	1692	1662	0- 10	1611	1611	4.33,4.33
20	1555	1536	1543	1575	1653	1659	1623	1573	10- 20	4624	6235	16.8,16.8
30	1389	1367	1386	1437	1521	1528	1493	1436	20- 30	7027	13261	35.6,35.6
40	1097	1077	1109	1188	1318	1330	1284	1199	30- 40	8355	21616	58.1,58.1
50	580.2	584.9	601.9	655.6	825.1	829.0	768.4	690.9	40- 50	7473	29089	78.2,78.2
60	273.2	281.4	280.4	299.3	344.7	351.3	330.2	310.1	50- 60	4222	33311	89.5,89.5
70	117.5	120.6	121.6	126.2	140.9	141.9	136.2	128.0	60- 70	2058	35369	95,95
80	34.93	35.60	36.52	40.30	45.39	44.06	41.71	38.96	70- 80	840.2	36209	97.3,97.3
90	11.14	11.15	11.18	11.38	6.092	6.048	6.052	6.121	80- 90	187.9	36397	97.8,97.8
100	9.937	9.946	9.877	9.851	7.127	7.085	7.157	7.293	90-100	92.39	36490	98,98
110	10.64	10.71	10.54	10.30	8.907	8.871	8.994	9.179	100-110	95.86	36586	98.3,98.3
120	12.30	12.43	12.22	11.85	11.14	11.09	11.27	11.48	110-120	106.1	36692	98.6,98.6
130	14.54	14.74	14.52	14.04	13.73	13.70	13.96	14.30	120-130	115.6	36807	98.9,98.9
140	17.06	17.36	17.18	16.65	16.31	16.30	16.64	16.98	130-140	119.9	36927	99.2,99.2
150	19.37	19.70	19.56	19.10	18.68	18.72	19.08	19.39	140-150	112.8	37040	99.5,99.5
160	21.56	21.87	21.78	21.42	21.04	21.09	21.47	21.75	150-160	93.92	37134	99.8,99.8
170	23.26	23.56	23.53	23.29	23.02	23.07	23.40	23.53	160-170	63.46	37197	99.9,99.9
180	23.80	24.07	24.14	24.14	23.87	23.98	24.22	24.08	170-180	22.60	37220	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 25691 lm

%lum = 69.0%

%lamp = 69.0%

Conical surface Flux(120deg): 33311 lm

%lum = 89.5%


%lamp = 89.5%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:218.32V I:1.1370A P:242.29W PF:0.9761 Freq:49.99Hz Lamp Flux:37220x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

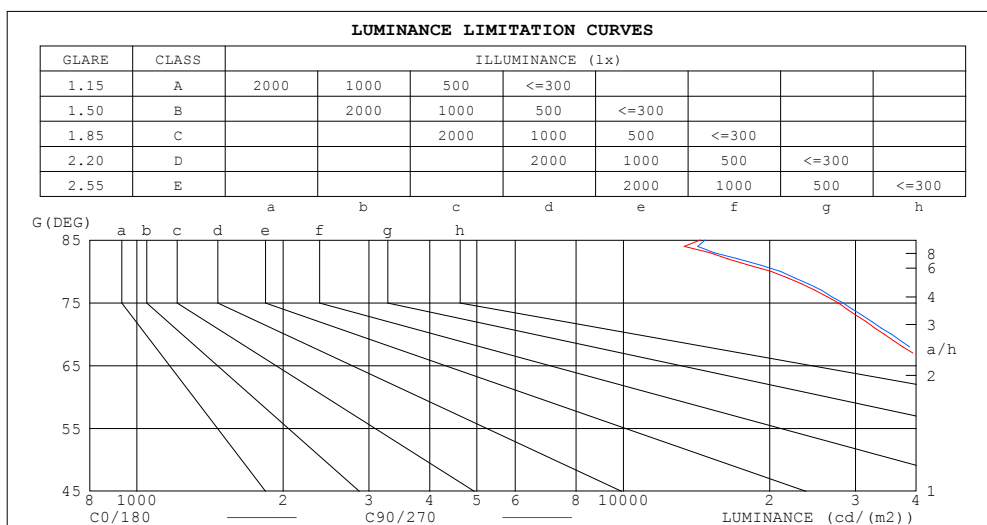


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-03-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:218.32V I:1.1370A P:242.29W PF:0.9761 Freq:49.99Hz Lamp Flux:37220x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.07	1.03	1.00	1.04	1.01	.98	.90	.97	.95	.95	.93	.92	.92	.90	.88	.86
2.0	.95	.90	.85	.93	.88	.84	.90	.85	.82	.86	.83	.79	.83	.80	.77	.75
3.0	.85	.79	.73	.84	.77	.72	.81	.75	.71	.78	.73	.69	.75	.71	.68	.66
4.0	.77	.69	.64	.76	.68	.63	.73	.67	.62	.70	.65	.61	.68	.64	.60	.58
5.0	.70	.62	.56	.68	.61	.55	.66	.60	.55	.64	.58	.54	.62	.57	.53	.51
6.0	.63	.55	.50	.62	.55	.49	.60	.54	.49	.59	.53	.48	.57	.52	.48	.46
7.0	.58	.50	.44	.57	.49	.44	.55	.49	.44	.54	.48	.43	.52	.47	.43	.41
8.0	.53	.45	.40	.52	.45	.40	.51	.44	.39	.50	.43	.39	.48	.43	.39	.37
9.0	.49	.41	.36	.48	.41	.36	.47	.40	.36	.46	.40	.35	.45	.39	.35	.34
10.0	.45	.38	.33	.45	.38	.33	.44	.37	.33	.43	.37	.32	.42	.36	.32	.31

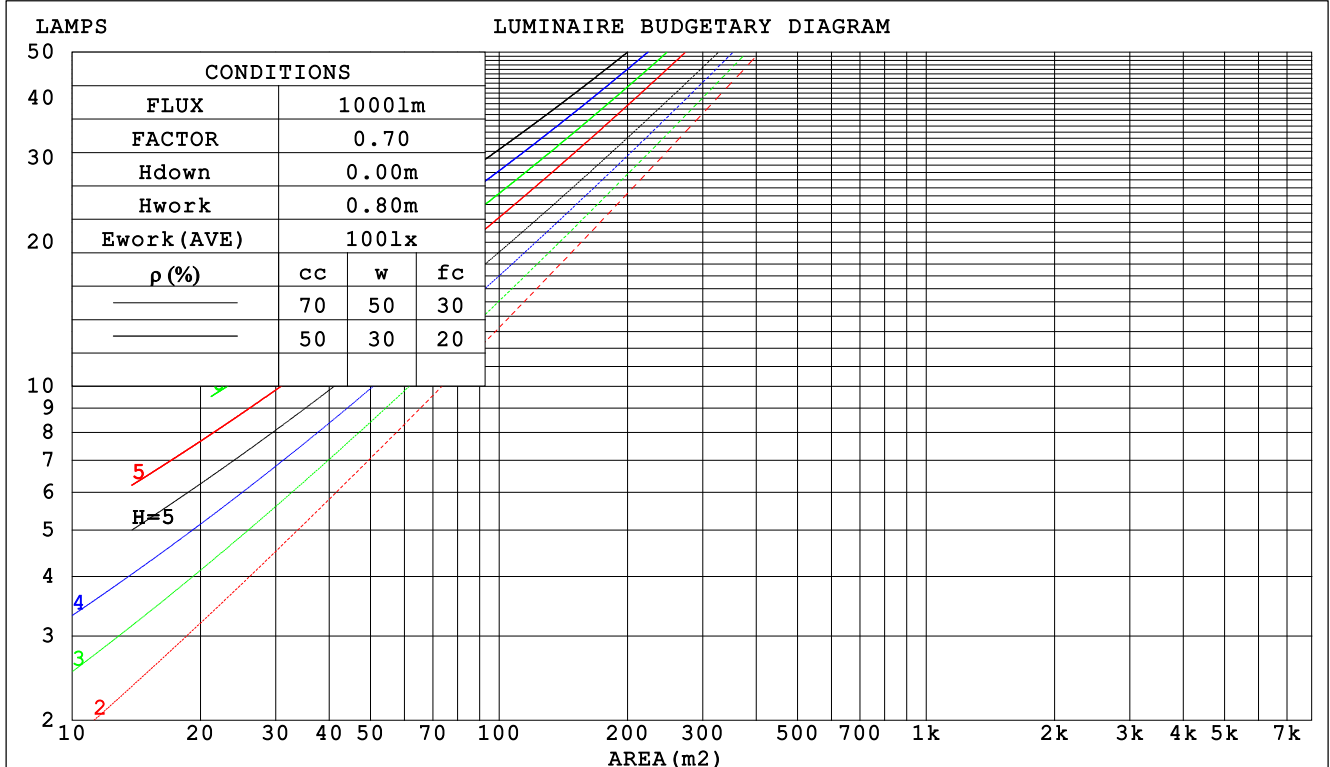

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:218.32V I:1.1370A P:242.29W PF:0.9761 Freq:49.99Hz Lamp Flux:37220x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.: EVERFINE		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.247	.141	.045	.240	.137	.043	.226	.129	.041	.213	.123	.039	.201	.116	.037		
2.0	.240	.131	.040	.233	.128	.040	.221	.123	.038	.209	.117	.037	.199	.112	.035		
3.0	.227	.121	.036	.221	.119	.036	.211	.114	.035	.200	.110	.034	.191	.106	.033		
4.0	.214	.111	.033	.209	.109	.032	.199	.106	.032	.190	.102	.031	.182	.099	.030		
5.0	.202	.103	.030	.197	.101	.029	.188	.098	.029	.180	.095	.028	.173	.092	.028		
6.0	.190	.095	.027	.186	.094	.027	.178	.091	.027	.171	.089	.026	.164	.086	.026		
7.0	.179	.088	.025	.175	.087	.025	.168	.085	.025	.162	.083	.024	.156	.081	.024		
8.0	.169	.083	.023	.166	.082	.023	.159	.080	.023	.153	.078	.022	.148	.076	.022		
9.0	.160	.077	.022	.157	.076	.021	.151	.075	.021	.146	.073	.021	.141	.071	.021		
10.0	.151	.073	.020	.149	.072	.020	.144	.070	.020	.139	.069	.020	.134	.067	.019		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.207	.207	.207	.177	.177	.177	.121	.121	.121	.069	.069	.069	.022	.022	.022	
1.0	.193	.174	.156	.165	.149	.134	.113	.103	.093	.065	.059	.054	.021	.019	.017	
2.0	.182	.149	.121	.156	.128	.105	.107	.089	.073	.062	.052	.043	.020	.017	.014	
3.0	.173	.131	.098	.149	.113	.085	.102	.079	.059	.059	.046	.035	.019	.015	.011	
4.0	.165	.117	.081	.142	.102	.070	.098	.071	.049	.056	.041	.029	.018	.013	.010	
5.0	.158	.107	.069	.136	.092	.060	.094	.065	.042	.054	.038	.025	.017	.012	.008	
6.0	.152	.098	.060	.130	.085	.052	.090	.060	.037	.052	.035	.022	.017	.011	.007	
7.0	.145	.091	.053	.125	.079	.046	.086	.055	.033	.050	.033	.020	.016	.011	.006	
8.0	.140	.085	.048	.120	.074	.042	.083	.052	.030	.048	.031	.018	.016	.010	.006	
9.0	.134	.081	.044	.115	.070	.039	.080	.049	.027	.047	.029	.016	.015	.010	.005	
10.0	.129	.076	.041	.111	.066	.036	.077	.047	.026	.045	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:218.32V I:1.1370A P:242.29W PF:0.9761 Freq:49.99Hz Lamp Flux:37220x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.7	28.0	27.0	28.2	28.5	26.8	28.1	27.1	28.3	28.6
3H	27.1	28.3	27.4	28.5	28.8	27.2	28.4	27.5	28.6	28.9
4H	27.2	28.3	27.5	28.6	28.9	27.3	28.4	27.6	28.7	29.0
6H	27.2	28.2	27.5	28.5	28.9	27.3	28.4	27.7	28.7	29.0
8H	27.2	28.2	27.5	28.5	28.8	27.3	28.3	27.6	28.6	28.9
12H	27.1	28.1	27.5	28.4	28.8	27.2	28.2	27.6	28.5	28.9
4H 2H	26.8	28.0	27.2	28.2	28.5	26.9	28.0	27.2	28.3	28.6
3H	27.3	28.3	27.7	28.6	29.0	27.4	28.4	27.8	28.7	29.1
4H	27.5	28.4	27.9	28.7	29.1	27.6	28.5	28.0	28.8	29.2
6H	27.6	28.4	28.0	28.7	29.1	27.7	28.5	28.1	28.8	29.2
8H	27.6	28.3	28.0	28.7	29.1	27.7	28.4	28.1	28.8	29.2
12H	27.6	28.2	28.0	28.6	29.1	27.7	28.3	28.1	28.7	29.2
8H 4H	27.5	28.2	27.9	28.6	29.0	27.6	28.3	28.0	28.7	29.1
6H	27.6	28.2	28.1	28.7	29.1	27.7	28.3	28.2	28.8	29.2
8H	27.7	28.2	28.2	28.6	29.1	27.8	28.3	28.3	28.7	29.2
12H	27.7	28.1	28.2	28.6	29.1	27.8	28.2	28.3	28.7	29.2
12H 4H	27.5	28.1	27.9	28.5	29.0	27.6	28.2	28.0	28.6	29.1
6H	27.6	28.1	28.1	28.6	29.1	27.7	28.2	28.2	28.7	29.2
8H	27.7	28.1	28.2	28.6	29.1	27.7	28.2	28.3	28.7	29.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.9 / - 1.1					+ 0.9 / - 1.1				
1.5H	+ 0.6 / - 0.7					+ 0.6 / - 0.7				
2.0H	+ 2.0 / - 1.5					+ 2.0 / - 1.5				

CIE Pub.117, 37220 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 12.6)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:218.32V I:1.1370A P:242.29W PF:0.9761 Freq:49.99Hz Lamp Flux:37220x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	65	55	49	64	55	49	63	54	48	43
0.80	75	65	59	74	65	59	72	64	58	52
1.00	83	74	68	82	73	68	80	74	67	61
1.25	90	81	75	88	81	75	86	79	74	68
1.50	94	86	81	93	85	80	90	83	79	72
2.00	100	93	88	98	92	87	95	89	85	78
2.50	103	97	92	101	95	91	97	92	89	81
3.00	106	100	96	103	98	95	99	95	92	84
4.00	109	104	100	106	102	99	102	99	96	87
5.00	111	107	103	108	105	102	103	101	98	89
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.32V I:1.1370A P:242.29W PF:0.9761 Freq:49.99Hz Lamp Flux:37220x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

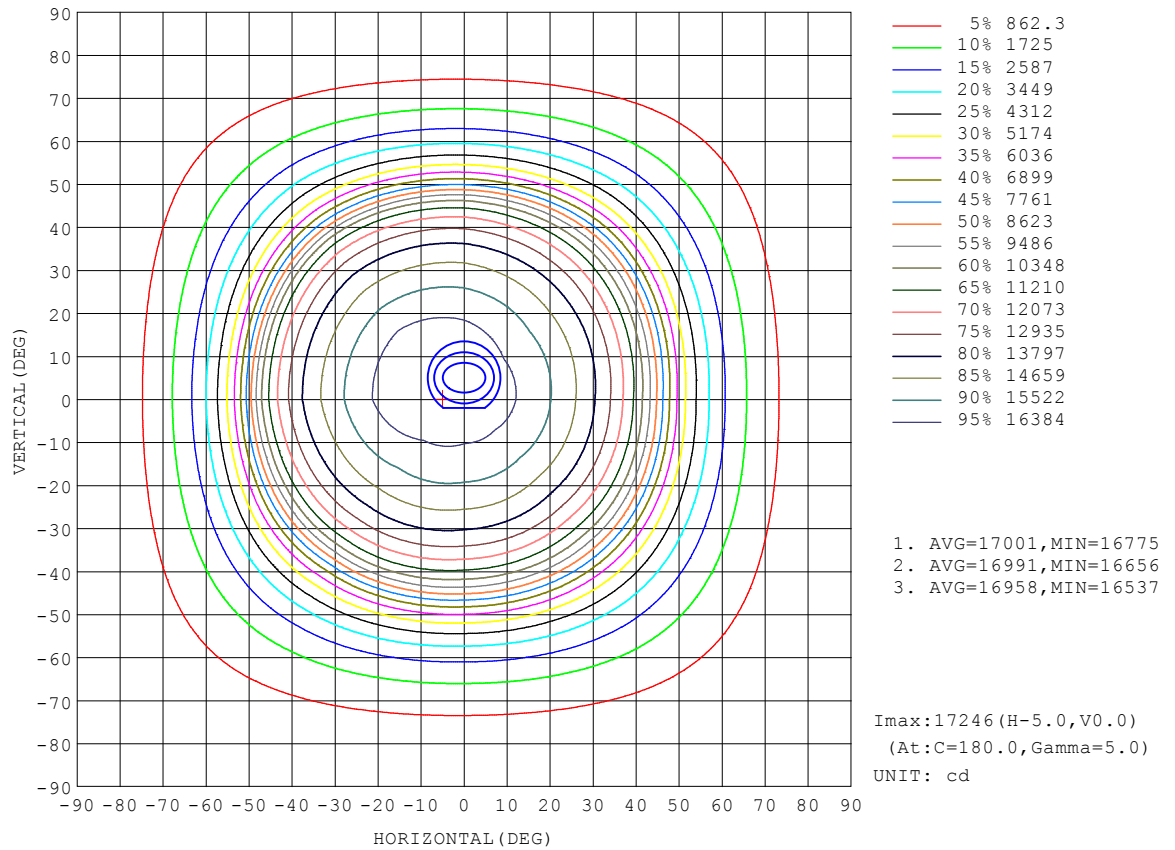


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.32V I:1.1370A P:242.29W PF:0.9761 Freq:49.99Hz Lamp Flux:37220x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Flux out:27844 lm

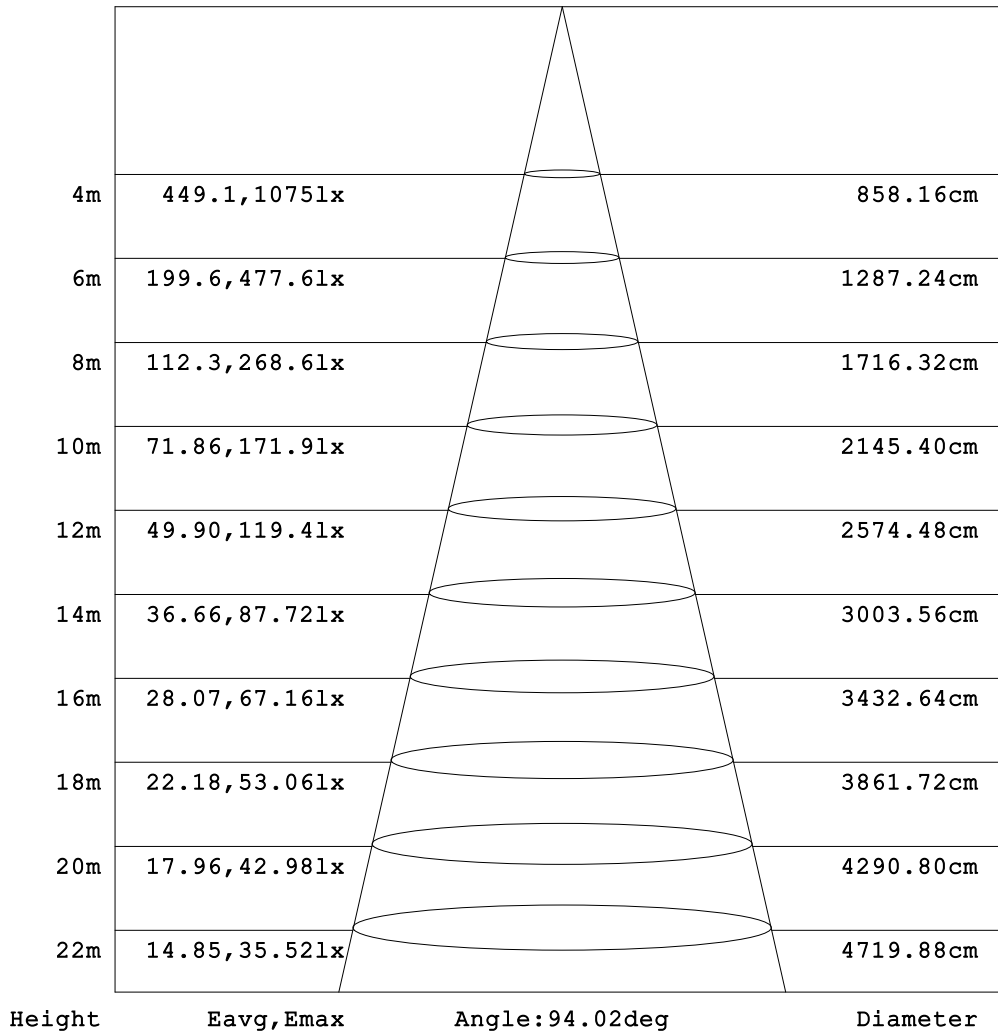


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.200m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:218.32V I:1.1370A P:242.29W PF:0.9761 Freq:49.99Hz Lamp Flux:37220x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

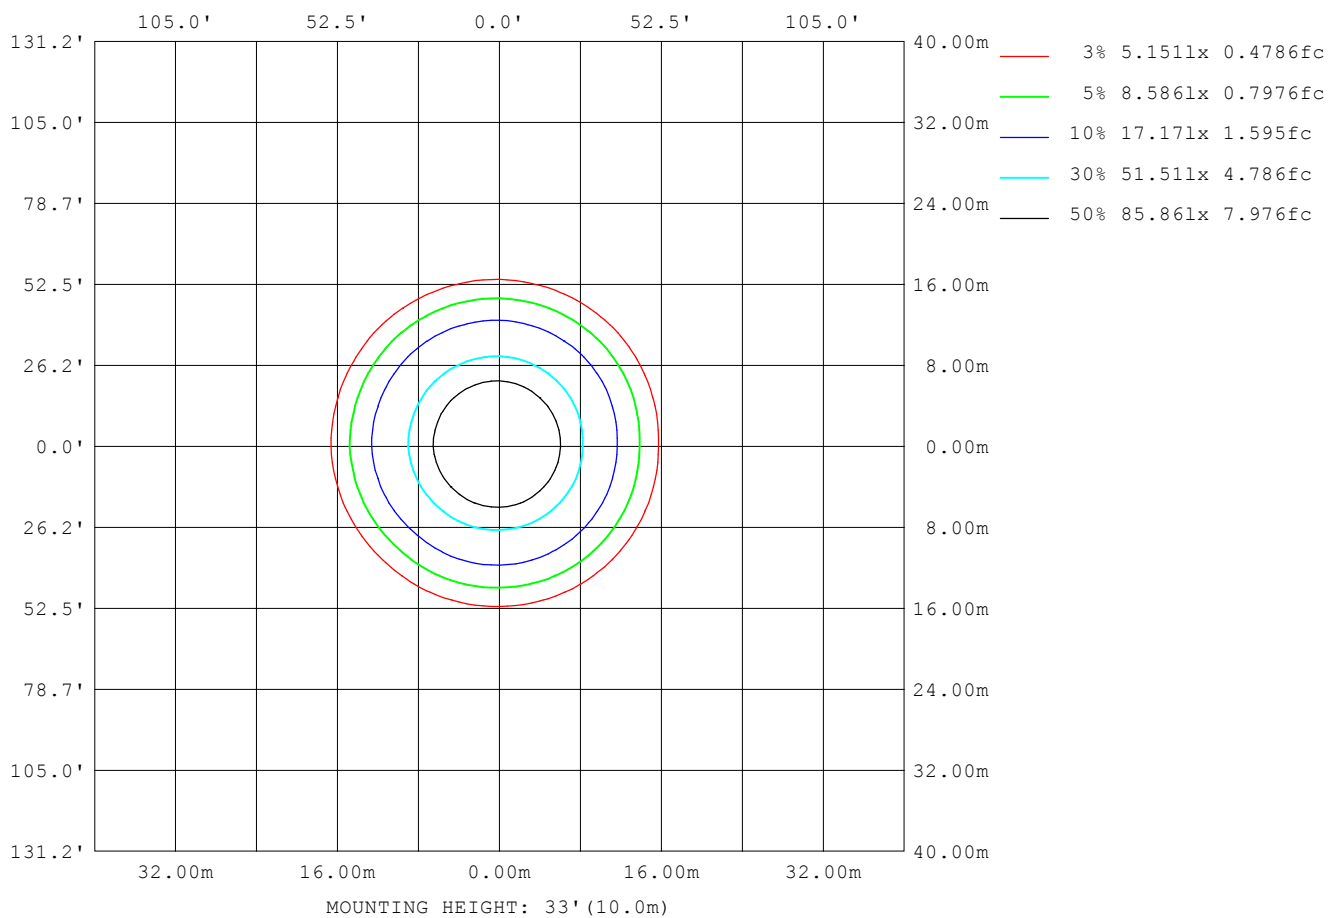

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:218.32V I:1.1370A P:242.29W PF:0.9761 Freq:49.99Hz Lamp Flux:37220x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	48012
L_0~180 (75) av	30147
L_0~180 (85) av	15903
L_90~270 (65) av	47856
L_90~270 (75) av	29687
L_90~270 (85) av	14617
L_45 (65) av	48243
L_45 (75) av	29970
L_45 (85) av	14548

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

Planar Illuminance Curve

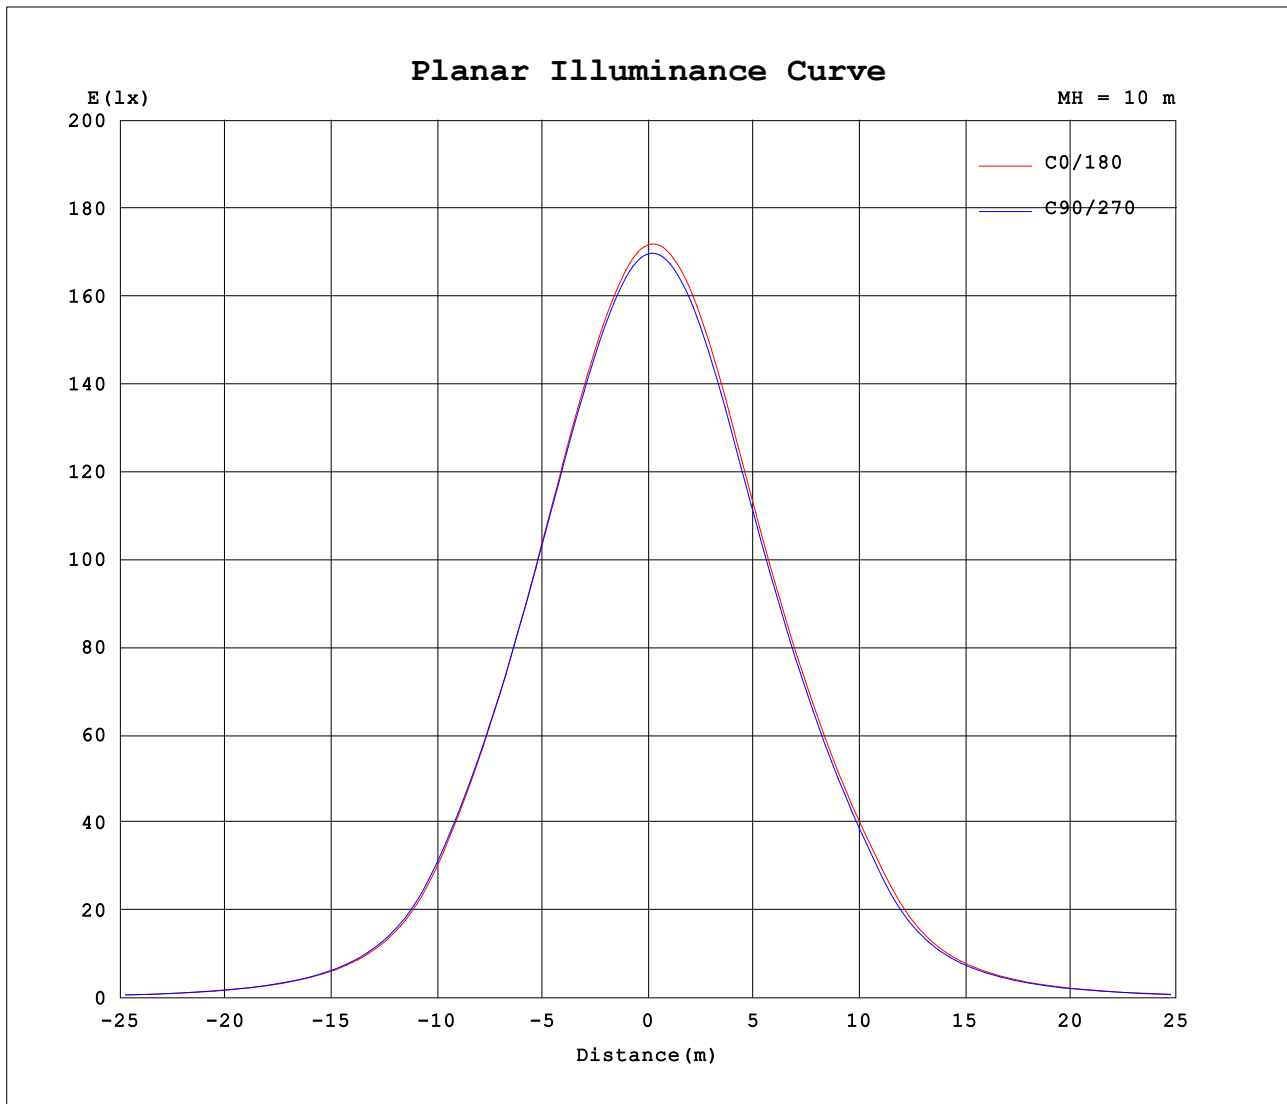

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.32V I:1.1370A P:242.29W PF:0.9761 Freq:49.99Hz Lamp Flux:37220x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1717	1705	1697	1693	1717	1705	1697	1693										
5	1694	1678	1676	1686	1725	1717	1702	1685										
10	1656	1639	1641	1663	1718	1713	1692	1662										
15	1610	1593	1597	1624	1694	1695	1667	1622										
20	1555	1536	1543	1575	1653	1659	1623	1573										
25	1482	1462	1474	1514	1592	1601	1564	1513										
30	1389	1367	1386	1437	1521	1528	1493	1436										
35	1267	1243	1270	1332	1435	1443	1405	1335										
40	1097	1077	1109	1188	1318	1330	1284	1199										
45	848	841	874	957	1141	1156	1097	990										
50	580	585	602	656	825	829	768	691										
55	400	410	413	446	524	535	498	462										
60	273	281	280	299	345	351	330	310										
65	182	188	188	197	224	228	217	203										
70	118	121	122	126	141	142	136	128										
75	71.6	73.1	73.1	77.2	84.4	83.9	80.6	76.1										
80	34.9	35.6	36.5	40.3	45.4	44.1	41.7	39.0										
85	12.5	12.6	12.8	13.8	15.2	14.3	12.6	10.1										
90	11.1	11.2	11.2	11.4	6.09	6.05	6.05	6.12										
95	10.3	10.3	10.3	10.4	6.49	6.45	6.49	6.60										
100	9.94	9.95	9.88	9.85	7.13	7.09	7.16	7.29										
105	10.1	10.2	10.0	9.88	7.93	7.89	7.99	8.16										
110	10.6	10.7	10.5	10.3	8.91	8.87	8.99	9.18										
115	11.4	11.5	11.3	11.0	9.98	9.95	10.1	10.3										
120	12.3	12.4	12.2	11.8	11.1	11.1	11.3	11.5										
125	13.4	13.5	13.3	12.9	12.4	12.3	12.5	12.8										
130	14.5	14.7	14.5	14.0	13.7	13.7	14.0	14.3										
135	15.8	16.1	15.9	15.3	15.1	15.1	15.4	15.7										
140	17.1	17.4	17.2	16.6	16.3	16.3	16.6	17.0										
145	18.2	18.5	18.4	17.9	17.5	17.5	17.9	18.2										
150	19.4	19.7	19.6	19.1	18.7	18.7	19.1	19.4										
155	20.5	20.8	20.7	20.3	19.9	19.9	20.3	20.6										
160	21.6	21.9	21.8	21.4	21.0	21.1	21.5	21.7										
165	22.5	22.8	22.8	22.5	22.1	22.2	22.6	22.8										
170	23.3	23.6	23.5	23.3	23.0	23.1	23.4	23.5										
175	23.7	24.0	24.0	23.9	23.6	23.7	24.0	24.0										
180	23.8	24.1	24.1	24.1	23.9	24.0	24.2	24.1										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: