


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:218.5V I:0.9191A P:198.6W PF:0.979 Freq:50.18Hz Lamp Flux:36642.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 184.52 lm/W			
MODEL		I _{max} (cd)	12713	S/MH(C0/180)	1.30
NOMINAL POWER(W)	200	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	36642	η UP,DN(C0-180)	1.3,47.9
NOMINAL FLUX(lm)	36642.2	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.2,49.6
LAMPS INSIDE	1	η up(%)	2.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.5	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

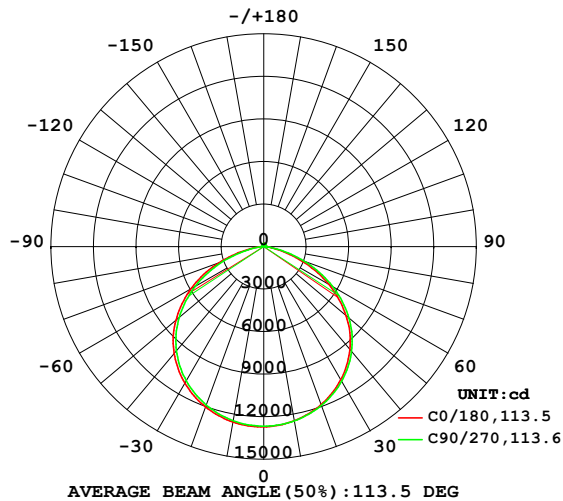

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

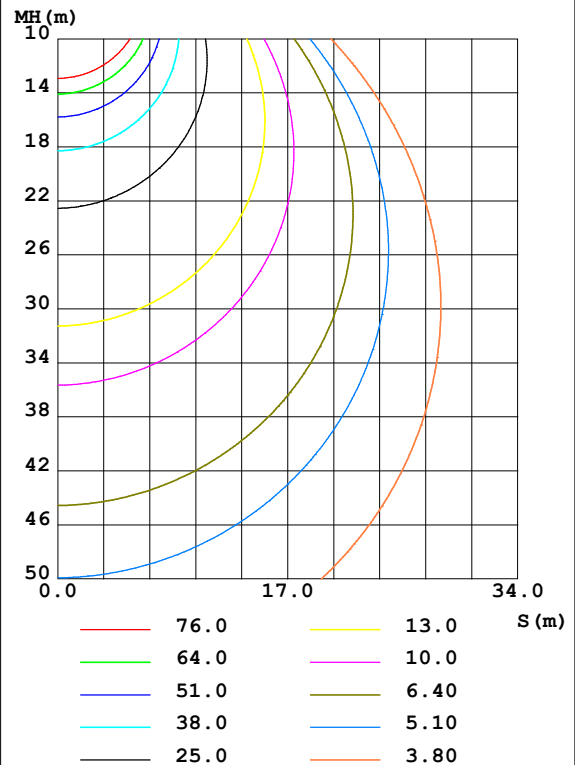

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	1247	1248	1256	1247					0- 10	1202	1202	3.28, 3.28
20	1185	1191	1203	1188					10- 20	3460	4662	12.7, 12.7
30	1086	1098	1113	1093					20- 30	5299	9961	27.2, 27.2
40	946.1	963.7	983.2	958.5					30- 40	6476	16437	44.9, 44.9
50	758.5	784.9	809.6	779.3					40- 50	6774	23211	63.3, 63.3
60	526.6	558.8	590.2	556.0					50- 60	6020	29231	79.8, 79.8
70	265.8	305.7	338.1	302.5					60- 70	4277	33508	91.4, 91.4
80	55.57	78.21	100.6	73.88					70- 80	1926	35434	96.7, 96.7
90	13.73	14.03	8.380	8.422					80- 90	299.2	35733	97.5, 97.5
100	12.07	12.19	9.367	9.554					90-100	118.6	35852	97.8, 97.8
110	12.15	12.03	11.50	11.78					100-110	118.7	35970	98.2, 98.2
120	13.19	12.97	13.87	14.12					110-120	125.9	36096	98.5, 98.5
130	14.70	14.41	16.06	16.29					120-130	129.3	36226	98.9, 98.9
140	16.66	16.36	18.20	18.38					130-140	126.6	36352	99.2, 99.2
150	18.73	18.45	19.98	20.07					140-150	115.2	36467	99.5, 99.5
160	20.55	20.35	21.32	21.33					150-160	92.96	36560	99.8, 99.8
170	21.87	21.71	22.20	22.13					160-170	60.71	36621	99.9, 99.9
180	22.46	22.42	22.53	22.37					170-180	21.19	36642	100, 100
DEG	LUMINOUS INTENSITY: $\times 10\text{cd}$									UNIT: lm		

Conical surface Flux(90deg): 19849 lm

%lum = 54.2%

%lamp = 54.2%

Conical surface Flux(120deg): 29231 lm

%lum = 79.8%


%lamp = 79.8%

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-06-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:218.5V I:0.9191A P:198.6W PF:0.979 Freq:50.18Hz Lamp Flux:36642.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

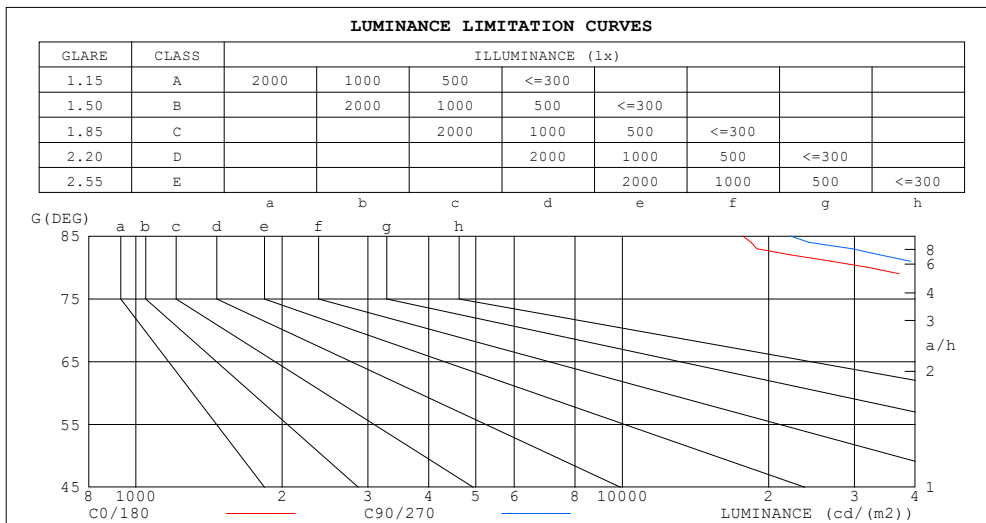

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	17697	22139
80	32000	45041
75	58079	69661
70	77701	89372
65	94522	102862
60	105326	111760
55	112755	117913
50	118001	122106
45	121527	124533


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-06-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:218.5V I:0.9191A P:198.6W PF:0.979 Freq:50.18Hz Lamp Flux:36642.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.04	1.00	.97	1.02	.98	.95	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.85	.79	.89	.83	.78	.85	.80	.76	.82	.77	.74	.78	.75	.72	.70
3.0	.80	.72	.66	.78	.71	.65	.75	.69	.64	.72	.67	.62	.69	.65	.61	.59
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.55	.48	.62	.54	.48	.60	.53	.47	.58	.51	.46	.56	.50	.46	.43
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.52	.46	.41	.50	.44	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.30	.43	.35	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

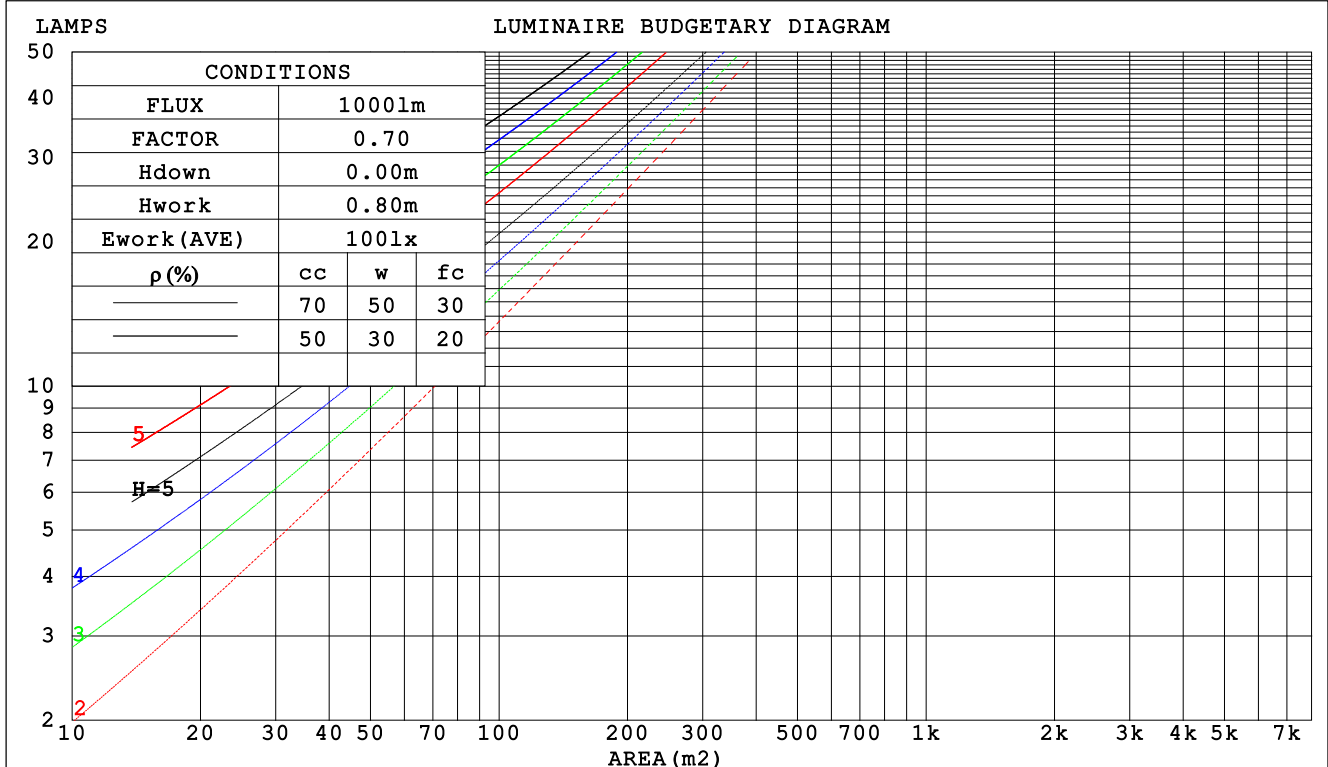

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:218.5V I:0.9191A P:198.6W PF:0.979 Freq:50.18Hz Lamp Flux:36642.2x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.: EVERFINE		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.290	.165	.052	.282	.161	.051	.268	.153	.049	.254	.147	.047	.242	.140	.045		
2.0	.278	.153	.047	.272	.150	.046	.259	.144	.045	.247	.138	.043	.236	.133	.042		
3.0	.261	.139	.042	.255	.136	.041	.243	.132	.040	.233	.127	.039	.223	.123	.038		
4.0	.242	.126	.037	.237	.124	.037	.227	.120	.036	.217	.117	.035	.208	.113	.034		
5.0	.225	.115	.033	.220	.113	.033	.211	.110	.032	.203	.107	.032	.195	.104	.031		
6.0	.210	.105	.030	.205	.104	.030	.197	.101	.029	.190	.098	.029	.182	.096	.029		
7.0	.196	.097	.027	.192	.096	.027	.184	.093	.027	.178	.091	.026	.171	.089	.026		
8.0	.183	.089	.025	.180	.088	.025	.173	.086	.025	.167	.084	.024	.161	.083	.024		
9.0	.172	.083	.023	.169	.082	.023	.163	.080	.023	.157	.079	.023	.152	.077	.022		
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.148	.074	.021	.144	.072	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.198	.175	.155	.169	.151	.133	.116	.104	.092	.067	.060	.054	.021	.019	.017	
2.0	.190	.151	.119	.162	.130	.103	.111	.090	.072	.064	.052	.042	.021	.017	.014	
3.0	.182	.134	.095	.156	.115	.082	.107	.080	.058	.062	.047	.034	.020	.015	.011	
4.0	.175	.120	.079	.150	.104	.068	.103	.072	.048	.060	.042	.028	.019	.014	.009	
5.0	.167	.110	.067	.144	.095	.059	.099	.066	.041	.057	.039	.025	.018	.013	.008	
6.0	.160	.101	.059	.138	.088	.052	.095	.062	.036	.055	.036	.022	.018	.012	.007	
7.0	.154	.095	.053	.132	.082	.046	.091	.058	.033	.053	.034	.020	.017	.011	.006	
8.0	.147	.089	.049	.127	.077	.042	.088	.054	.030	.051	.032	.018	.017	.010	.006	
9.0	.142	.084	.045	.122	.073	.039	.084	.051	.028	.049	.030	.017	.016	.010	.006	
10.0	.136	.080	.042	.117	.069	.037	.081	.049	.026	.047	.029	.016	.015	.009	.005	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Jason
 Test Date: 2025-06-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.250m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:218.5V I:0.9191A P:198.6W PF:0.979 Freq:50.18Hz Lamp Flux:36642.2x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: EVERFINE					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	16.6	18.1	16.9	18.3	18.6	16.8	18.3	17.1	18.5	18.8
	3H	17.7	19.0	18.0	19.3	19.6	18.0	19.4	18.4	19.7	19.9
	4H	18.0	19.3	18.3	19.5	19.9	18.4	19.7	18.7	20.0	20.3
	6H	18.0	19.2	18.4	19.5	19.9	18.5	19.7	18.9	20.0	20.4
	8H	18.0	19.2	18.4	19.5	19.8	18.5	19.7	18.9	20.0	20.3
	12H	18.0	19.1	18.3	19.4	19.8	18.5	19.6	18.9	19.9	20.3
4H	2H	17.2	18.4	17.5	18.7	19.0	17.3	18.6	17.7	18.9	19.2
	3H	18.4	19.5	18.8	19.8	20.2	18.7	19.8	19.0	20.1	20.5
	4H	18.7	19.7	19.1	20.1	20.5	19.1	20.1	19.5	20.5	20.8
	6H	18.8	19.7	19.3	20.1	20.5	19.3	20.2	19.7	20.6	21.0
	8H	18.8	19.6	19.3	20.1	20.5	19.3	20.1	19.7	20.5	21.0
	12H	18.8	19.5	19.3	20.0	20.4	19.3	20.0	19.7	20.4	20.9
8H	4H	18.8	19.7	19.3	20.1	20.5	19.2	20.0	19.6	20.4	20.8
	6H	19.0	19.7	19.5	20.1	20.6	19.4	20.1	19.9	20.5	21.0
	8H	19.0	19.6	19.5	20.1	20.6	19.5	20.1	20.0	20.5	21.0
	12H	19.0	19.5	19.5	20.0	20.5	19.5	20.0	20.0	20.5	21.0
12H	4H	18.8	19.6	19.3	20.0	20.4	19.1	19.9	19.6	20.3	20.8
	6H	19.0	19.6	19.5	20.1	20.6	19.4	20.0	19.9	20.5	21.0
	8H	19.0	19.5	19.5	20.0	20.5	19.4	20.0	20.0	20.4	21.0
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4					

CIE Pub.117, 36642 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 12.5)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:218.5V I:0.9191A P:198.6W PF:0.979 Freq:50.18Hz Lamp Flux:36642.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	55	45	39	32
0.80	68	56	49	66	56	49	65	55	48	41
1.00	76	65	58	75	65	58	72	66	57	50
1.25	83	73	66	82	72	66	79	71	65	57
1.50	88	79	72	87	78	71	83	76	70	62
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	74
3.00	102	96	91	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	99	95	92	82
5.00	109	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.5V I:0.9191A P:198.6W PF:0.979 Freq:50.18Hz Lamp Flux:36642.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

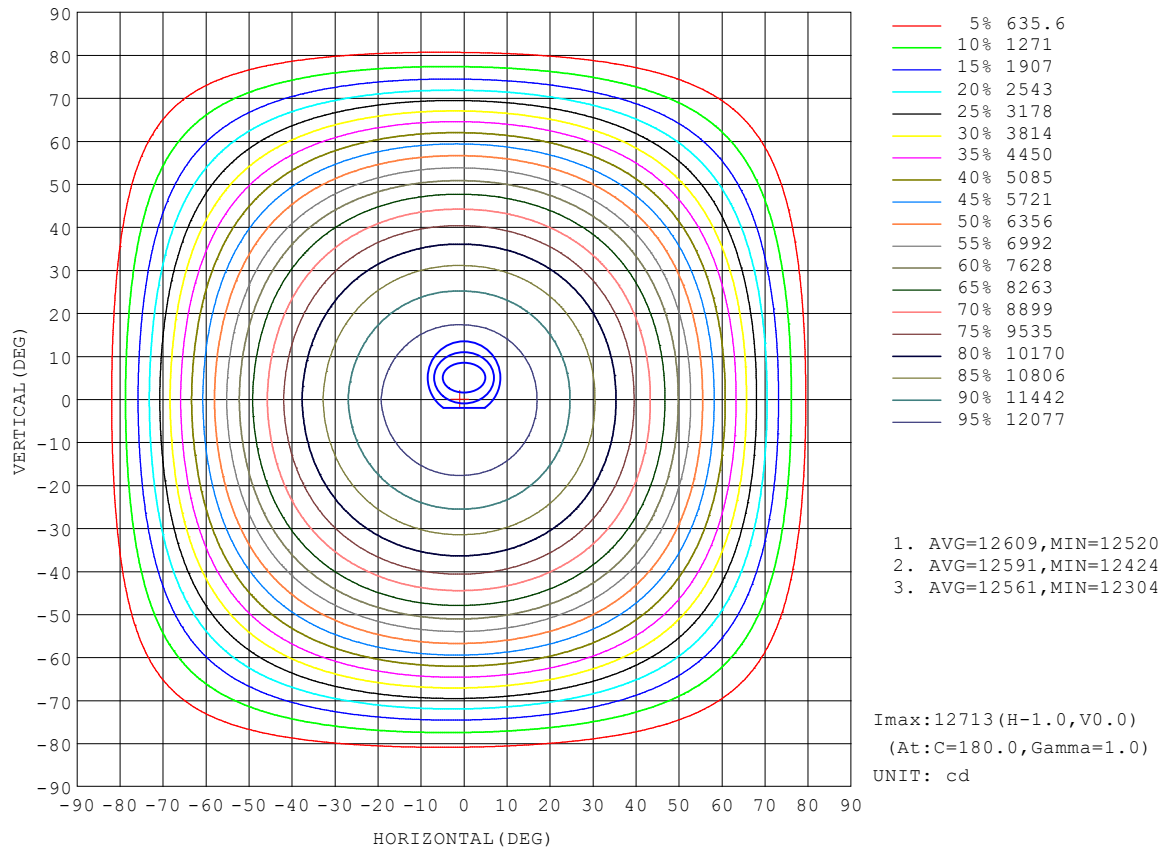


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.5V I:0.9191A P:198.6W PF:0.979 Freq:50.18Hz Lamp Flux:36642.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

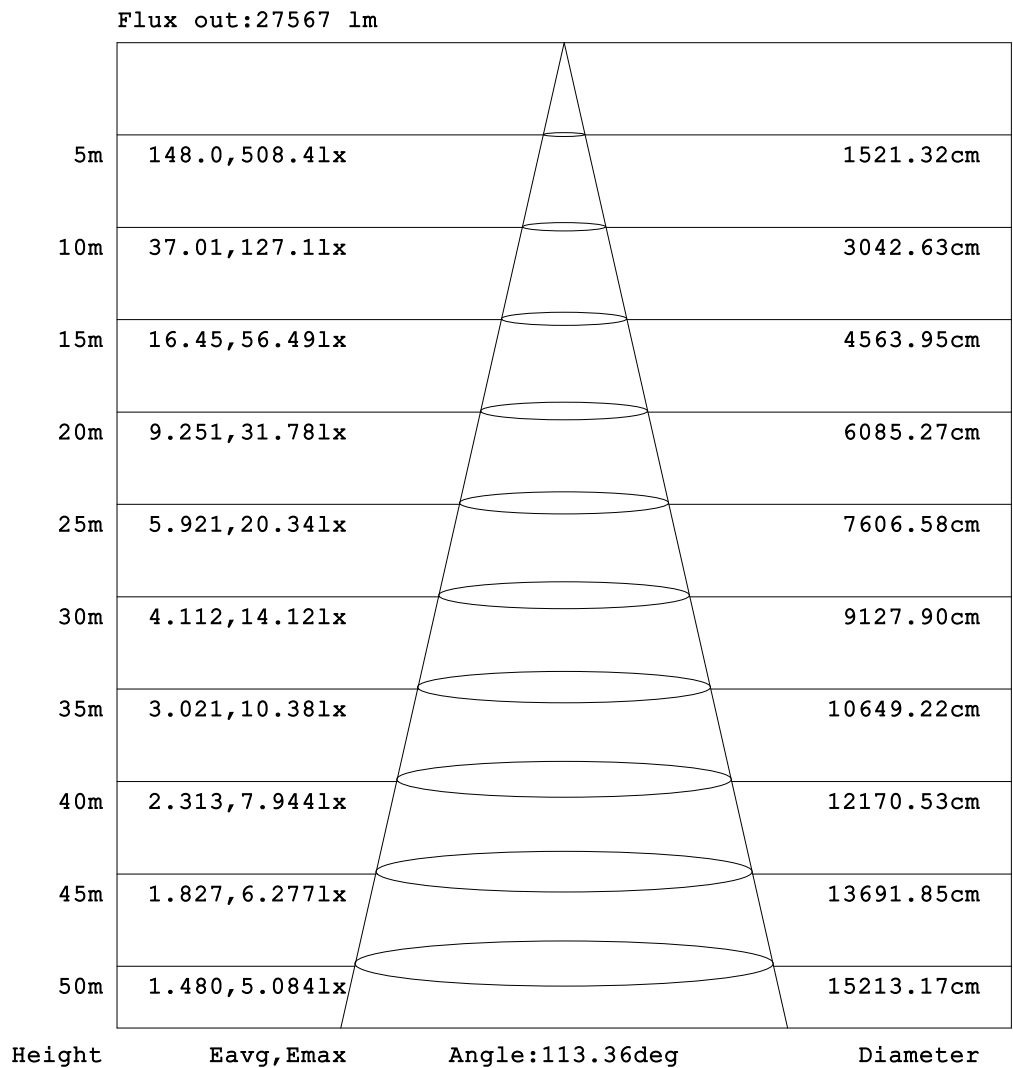


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:218.5V I:0.9191A P:198.6W PF:0.979 Freq:50.18Hz Lamp Flux:36642.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

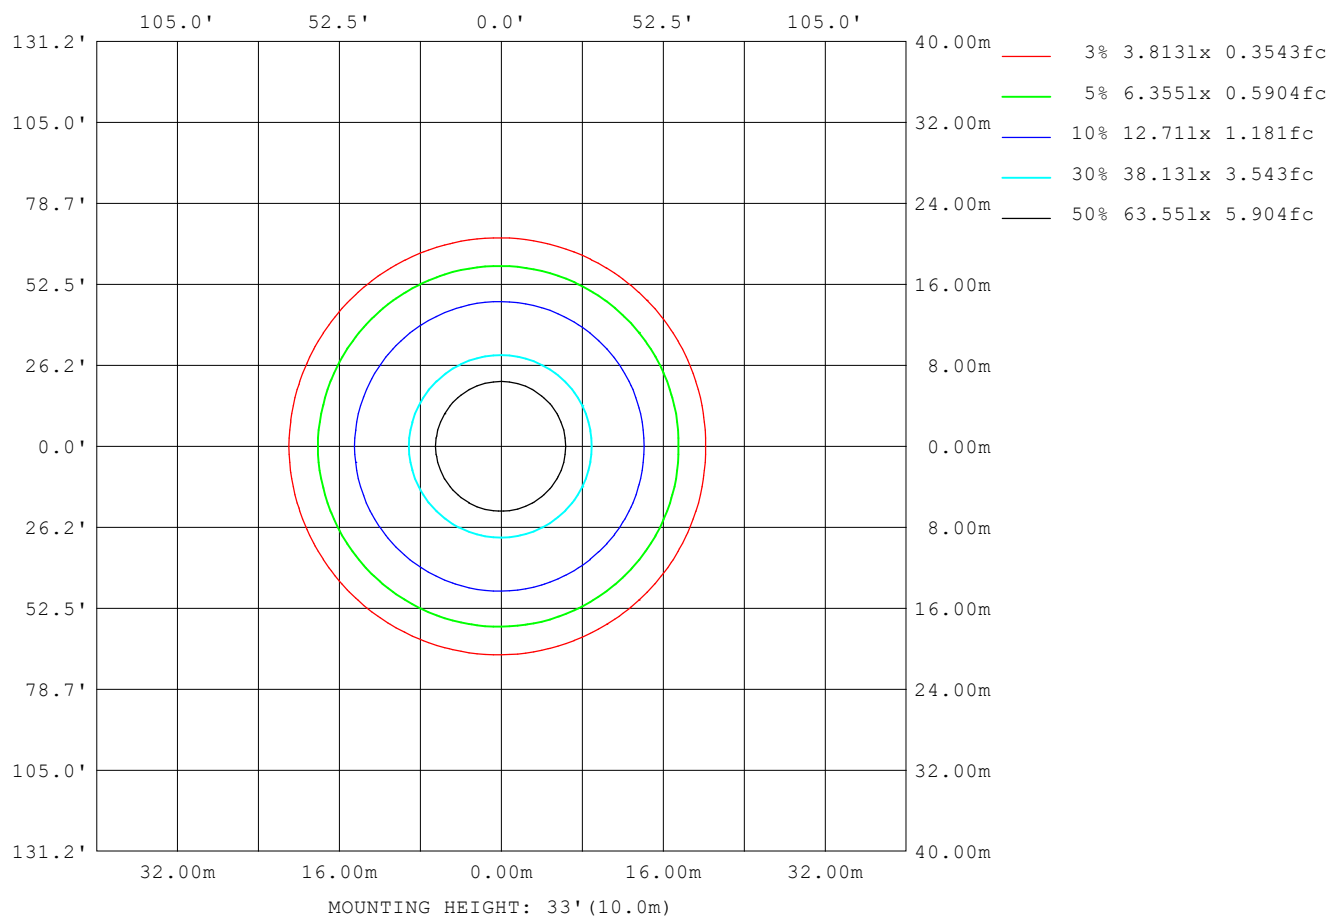

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-06-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:218.5V I:0.9191A P:198.6W PF:0.979 Freq:50.18Hz Lamp Flux:36642.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	102646
L_0~180 (75) av	69604
L_0~180 (85) av	21768
L_90~270 (65) av	102594
L_90~270 (75) av	69082
L_90~270 (85) av	18524
L_45 (65) av	103122
L_45 (75) av	69998
L_45 (85) av	19995

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

Planar Illuminance Curve

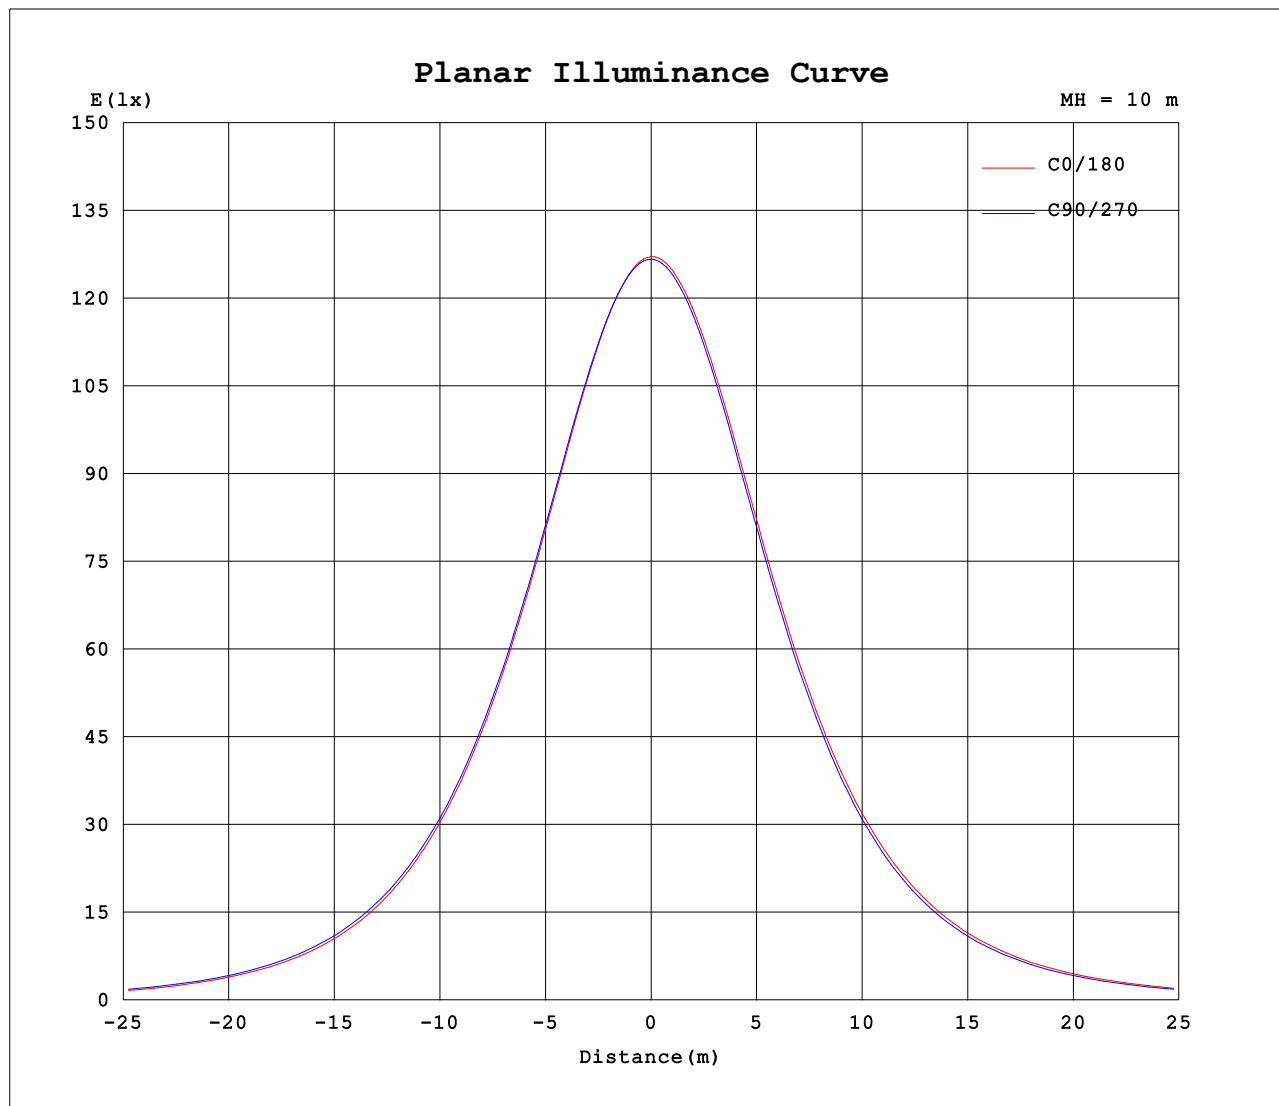

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-06-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.5V I:0.9191A P:198.6W PF:0.979 Freq:50.18Hz Lamp Flux:36642.2x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	90	180	270															
0	1271	1267	1271	1267															
5	1264	1262	1268	1262															
10	1247	1248	1256	1247															
15	1221	1224	1234	1222															
20	1185	1191	1203	1188															
25	1140	1149	1162	1145															
30	1086	1098	1113	1093															
35	1022	1036	1053	1031															
40	946	964	983	959															
45	859	881	903	875															
50	758	785	810	779															
55	647	676	704	672															
60	527	559	590	556															
65	399	435	468	432															
70	266	306	338	302															
75	150	180	210	177															
80	55.6	78.2	101	73.9															
85	15.4	19.3	22.5	13.0															
90	13.7	14.0	8.38	8.42															
95	12.7	13.0	8.72	8.84															
100	12.1	12.2	9.37	9.55															
105	11.9	11.9	10.3	10.6															
110	12.2	12.0	11.5	11.8															
115	12.6	12.4	12.7	13.0															
120	13.2	13.0	13.9	14.1															
125	13.9	13.6	15.0	15.2															
130	14.7	14.4	16.1	16.3															
135	15.6	15.3	17.2	17.4															
140	16.7	16.4	18.2	18.4															
145	17.7	17.4	19.2	19.3															
150	18.7	18.4	20.0	20.1															
155	19.7	19.4	20.7	20.8															
160	20.6	20.3	21.3	21.3															
165	21.3	21.1	21.8	21.8															
170	21.9	21.7	22.2	22.1															
175	22.3	22.2	22.4	22.3															
180	22.5	22.4	22.5	22.4															

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	12710	12668	12710	12668
3.0	12678	12653	12707	12649
6.0	12612	12601	12667	12594
9.0	12511	12515	12592	12503
12.0	12374	12394	12483	12378
15.0	12206	12242	12340	12221
18.0	12005	12057	12163	12028
21.0	11769	11838	11954	11806
24.0	11503	11585	11711	11548
27.0	11200	11299	11436	11257
30.0	10859	10976	11126	10932
33.0	10484	10619	10780	10571
36.0	10073	10224	10399	10175
39.0	9620	9790	9982	9740
42.0	9128	9315	9526	9265
45.0	8593	8806	9033	8753
48.0	8005	8249	8490	8194
51.0	7366	7639	7895	7586
54.0	6698	6987	7257	6942
57.0	5997	6301	6595	6266
60.0	5266	5588	5902	5560
63.0	4517	4850	5174	4827
66.0	3728	4093	4427	4070
69.0	2915	3321	3651	3294
72.0	2169	2533	2847	2497
75.0	1503	1803	2100	1773
78.0	885.9	1156	1421	1122
81.0	420.7	612.4	805.8	570.6
84.0	192.2	253.1	350.4	196.7
87.0	144.3	149.0	106.4	84.28
90.0	137.3	140.3	83.80	84.22
93.0	131.1	133.7	85.48	86.36
96.0	125.7	128.0	88.26	89.59
99.0	121.7	123.1	92.15	93.90
102.0	119.6	120.1	96.94	99.20
105.0	119.3	119.1	102.8	105.6
108.0	120.3	119.4	109.8	112.7
111.0	122.3	120.8	117.6	120.4
114.0	125.0	123.1	124.9	127.6
117.0	128.3	126.1	132.0	134.5
120.0	131.9	129.7	138.7	141.2
123.0	136.0	133.5	145.3	147.6
126.0	140.4	137.8	151.8	154.1
129.0	145.3	142.5	158.3	160.6
132.0	150.6	147.6	165.0	167.2
135.0	156.4	153.3	171.6	173.6
138.0	162.5	159.4	178.0	179.8
141.0	168.7	165.7	184.0	185.7
144.0	174.8	172.0	189.8	191.2
147.0	181.1	178.2	195.0	196.1
150.0	187.3	184.5	199.8	200.7
153.0	193.2	190.6	204.4	205.0
156.0	198.8	196.4	208.4	208.8
159.0	203.9	201.8	212.0	212.2
162.0	208.6	206.6	215.3	215.3
165.0	212.9	211.0	218.2	217.9
168.0	216.6	214.9	220.6	220.1
171.0	219.6	218.1	222.6	221.8
174.0	222.1	221.0	224.2	223.1
177.0	223.8	223.1	224.9	223.6
180.0	224.6	224.2	225.3	223.7

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Jason
 Test Date: 2025-06-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.250m [K=1.0000]
 Remarks: