


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:219.17V I:0.9283A P:199.99W PF:0.9830 Freq:50.09Hz Lamp Flux:28978.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 144.90 lm/W			
MODEL		Imax(cd)	10069	S/MH(C0/180)	1.29
NOMINAL POWER(W)	200	LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	28979	η UP,DN(C0-180)	1.5,48.9
NOMINAL FLUX(lm)	28978.9	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.8,48.9
LAMPS INSIDE	1	η up(%)	2.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

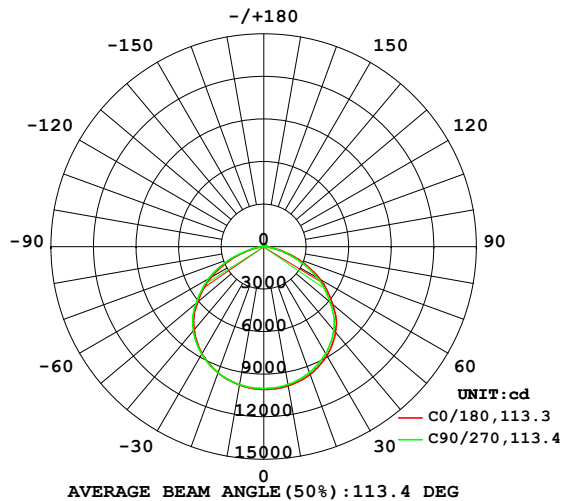

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

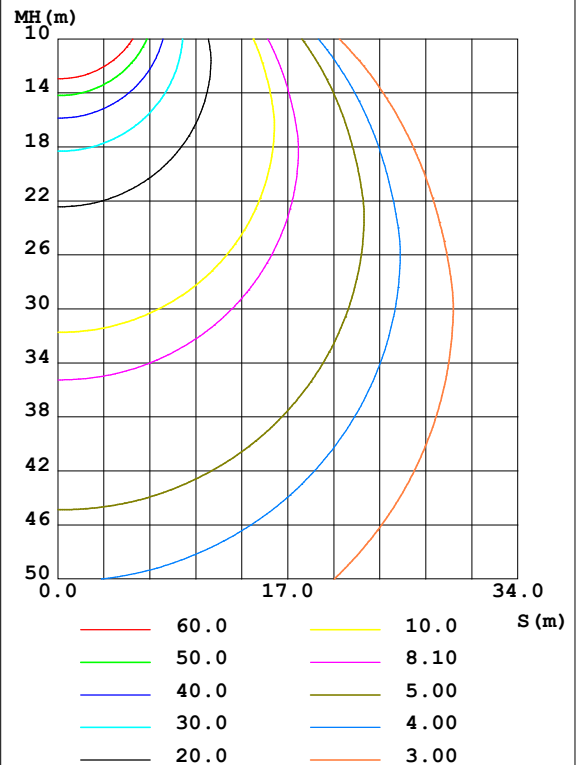

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-02-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	996.9	993.0	987.2	981.2	991.0	987.7	987.4	988.7	0- 10	950.6	950.6	3.28,3.28
20	958.2	953.3	944.3	935.0	946.0	943.3	946.1	951.0	10- 20	2745	3696	12.8,12.8
30	888.9	883.7	872.2	859.1	870.8	869.1	875.2	884.0	20- 30	4219	7914	27.3,27.3
40	788.0	783.2	768.6	751.5	764.4	763.6	773.2	785.8	30- 40	5179	13094	45.2,45.2
50	634.6	630.5	612.4	590.3	608.8	610.1	623.7	642.4	40- 50	5419	18512	63.9,63.9
60	457.6	452.9	434.1	409.2	426.0	428.8	445.9	466.4	50- 60	4746	23258	80.3,80.3
70	254.5	249.3	227.4	201.4	218.7	222.2	241.8	264.7	60- 70	3337	26595	91.8,91.8
80	72.41	70.02	57.24	44.21	47.05	49.28	61.06	77.05	70- 80	1476	28071	96.9,96.9
90	14.04	14.01	13.92	13.83	4.958	4.963	4.974	5.096	80- 90	256.0	28327	97.8,97.8
100	13.65	13.59	13.49	13.44	5.298	5.272	5.219	5.147	90-100	102.5	28430	98.1,98.1
110	13.40	13.34	13.25	13.23	5.854	5.816	5.745	5.659	100-110	99.96	28530	98.5,98.5
120	13.39	13.33	13.26	13.28	6.434	6.385	6.307	6.219	110-120	95.96	28626	98.8,98.8
130	13.64	13.58	13.53	13.57	7.124	7.063	6.963	6.856	120-130	90.06	28716	99.1,99.1
140	14.02	13.96	13.90	13.93	8.151	8.062	7.928	7.777	130-140	82.10	28798	99.4,99.4
150	14.45	14.39	14.31	14.32	9.675	9.566	9.396	9.206	140-150	71.58	28870	99.6,99.6
160	14.86	14.80	14.70	14.67	11.58	11.47	11.29	11.09	150-160	57.61	28927	99.8,99.8
170	14.93	14.87	14.74	14.66	13.31	13.19	13.04	12.85	160-170	38.29	28965	100,100
180	14.38	14.30	14.14	14.02	14.41	14.28	14.17	14.00	170-180	13.44	28979	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 15834 lm

%lum = 54.6%

%lamp = 54.6%

Conical surface Flux(120deg): 23258 lm

%lum = 80.3%


%lamp = 80.3%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-02-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.850m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:219.17V I:0.9283A P:199.99W PF:0.9830 Freq:50.09Hz Lamp Flux:28978.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

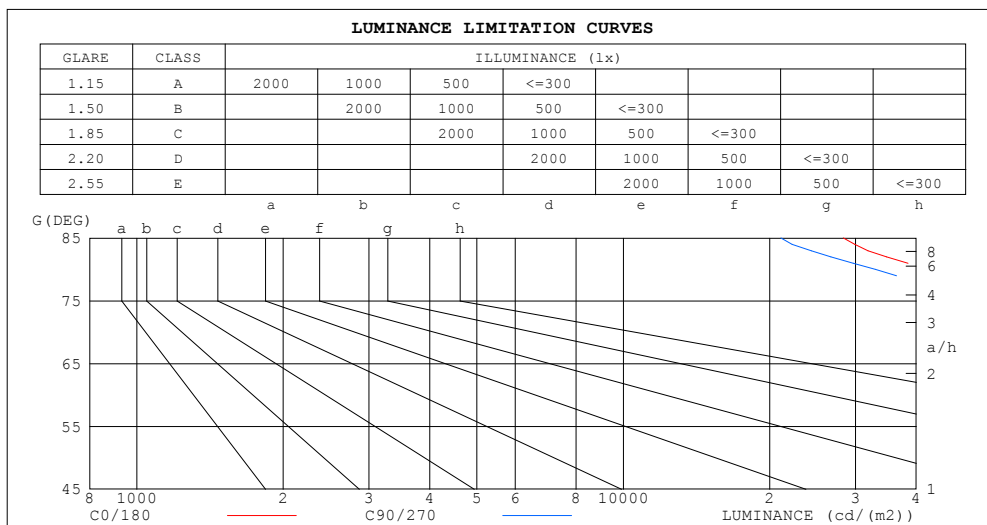


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-02-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:219.17V I:0.9283A P:199.99W PF:0.9830 Freq:50.09Hz Lamp Flux:28978.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.04	1.00	.97	1.02	.98	.95	.97	.94	.92	.93	.91	.88	.89	.87	.85	.83
2.0	.91	.85	.79	.89	.83	.78	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.66	.79	.71	.65	.75	.69	.64	.72	.67	.63	.70	.65	.61	.59
4.0	.71	.63	.56	.70	.62	.56	.67	.60	.55	.64	.58	.54	.62	.57	.53	.50
5.0	.64	.55	.48	.62	.54	.48	.60	.53	.47	.58	.51	.46	.56	.50	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.52	.46	.41	.50	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.33	.44	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.36	.30	.26	.24

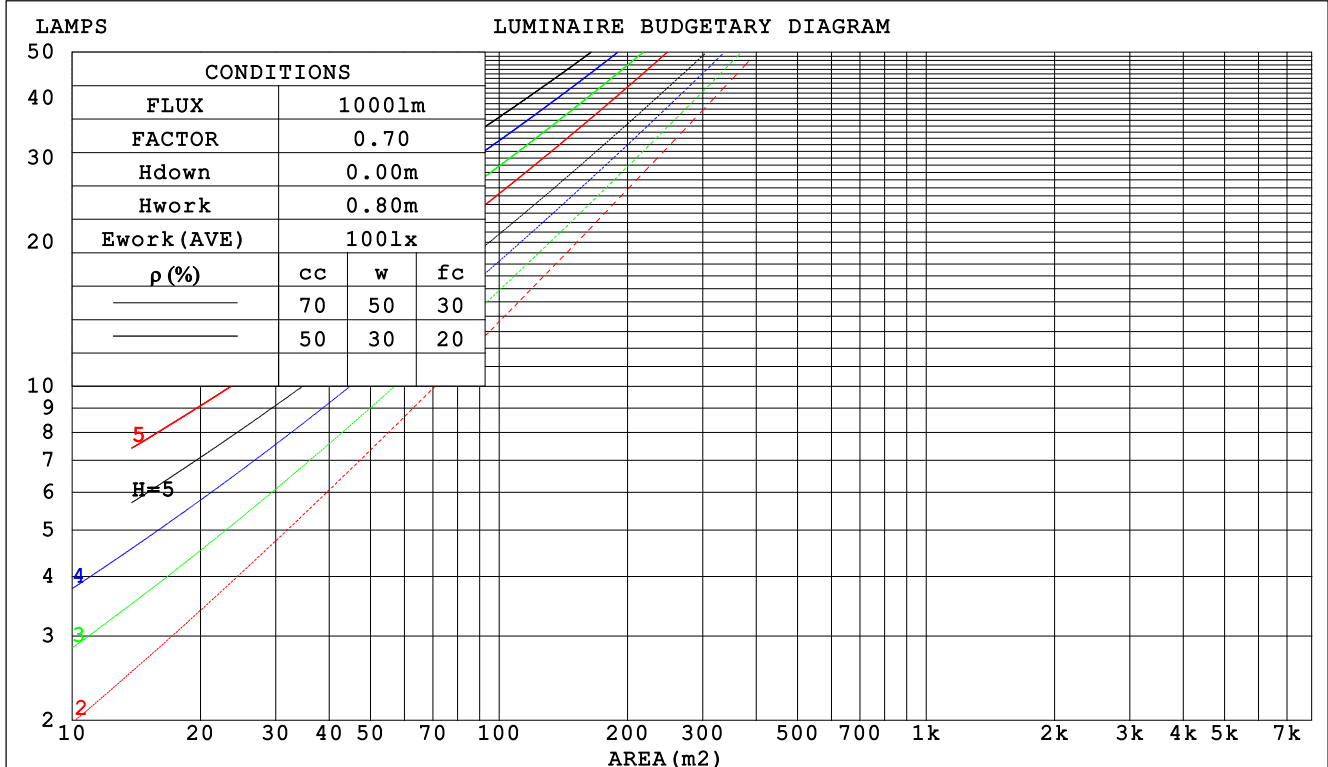

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-02-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:219.17V I:0.9283A P:199.99W PF:0.9830 Freq:50.09Hz Lamp Flux:28978.9x1 lm									
NAME:				TYPE:			WEIGHT:		
SPEC.:				DIM.:			SERIAL No.:		
MFR.: EVERFINE				SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.289	.165	.052	.282	.161	.051	.267	.153	.049	.254	.146	.047	.242	.140	.045		
2.0	.278	.152	.047	.271	.149	.046	.258	.144	.045	.246	.138	.043	.236	.133	.042		
3.0	.260	.138	.041	.254	.136	.041	.243	.132	.040	.232	.127	.039	.222	.123	.038		
4.0	.242	.126	.037	.237	.124	.037	.226	.120	.036	.217	.117	.035	.208	.113	.034		
5.0	.225	.115	.033	.220	.113	.033	.211	.110	.032	.203	.107	.032	.195	.104	.031		
6.0	.209	.105	.030	.205	.104	.030	.197	.101	.029	.189	.098	.029	.182	.096	.029		
7.0	.195	.097	.027	.192	.095	.027	.184	.093	.027	.178	.091	.026	.171	.089	.026		
8.0	.183	.089	.025	.180	.088	.025	.173	.086	.025	.167	.085	.024	.161	.083	.024		
9.0	.172	.083	.023	.169	.082	.023	.163	.080	.023	.157	.079	.023	.152	.077	.022		
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.148	.074	.021	.144	.072	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.177	.177	.177	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.196	.174	.153	.168	.149	.132	.115	.102	.091	.066	.059	.053	.021	.019	.017	
2.0	.188	.149	.117	.161	.129	.101	.110	.089	.071	.064	.052	.041	.020	.017	.013	
3.0	.180	.132	.093	.154	.114	.081	.106	.079	.057	.061	.046	.033	.020	.015	.011	
4.0	.173	.118	.077	.148	.102	.067	.102	.071	.047	.059	.042	.028	.019	.014	.009	
5.0	.165	.108	.066	.142	.093	.057	.098	.065	.040	.057	.038	.024	.018	.013	.008	
6.0	.158	.100	.057	.136	.086	.050	.094	.060	.035	.055	.036	.021	.018	.012	.007	
7.0	.152	.093	.051	.131	.080	.045	.090	.056	.032	.052	.033	.019	.017	.011	.006	
8.0	.146	.087	.047	.125	.075	.041	.087	.053	.029	.050	.031	.017	.016	.010	.006	
9.0	.140	.082	.043	.120	.071	.038	.083	.050	.027	.049	.030	.016	.016	.010	.005	
10.0	.134	.078	.040	.116	.068	.035	.080	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-02-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:219.17V I:0.9283A P:199.99W PF:0.9830 Freq:50.09Hz Lamp Flux:28978.9x1 lm												
NAME:					TYPE:			WEIGHT:				
SPEC.:					DIM.:			SERIAL No.:				
MFR.: EVERFINE					SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	17.1	18.5	17.4	18.8	19.0	16.9	18.3	17.2	18.6	18.8	
	3H	18.3	19.7	18.7	19.9	20.2	18.0	19.4	18.4	19.7	19.9	
	4H	18.7	20.0	19.1	20.3	20.6	18.3	19.6	18.7	19.9	20.2	
	6H	18.9	20.1	19.2	20.4	20.7	18.5	19.7	18.8	20.0	20.3	
	8H	18.9	20.0	19.3	20.4	20.7	18.4	19.6	18.8	19.9	20.3	
	12H	18.9	20.0	19.3	20.3	20.7	18.4	19.5	18.8	19.9	20.2	
	4H	2H	17.6	18.9	17.9	19.2	19.5	17.4	18.7	17.8	19.0	19.3
		3H	19.0	20.1	19.4	20.4	20.8	18.7	19.9	19.1	20.2	20.5
		4H	19.5	20.5	19.9	20.8	21.2	19.2	20.2	19.6	20.5	20.9
		6H	19.7	20.6	20.1	21.0	21.4	19.3	20.2	19.8	20.6	21.0
		8H	19.7	20.6	20.2	21.0	21.4	19.3	20.2	19.8	20.6	21.0
		12H	19.8	20.5	20.2	20.9	21.4	19.3	20.1	19.8	20.5	21.0
8H	4H	19.6	20.4	20.0	20.8	21.3	19.3	20.1	19.7	20.5	21.0	
	6H	19.9	20.6	20.4	21.0	21.5	19.6	20.2	20.0	20.7	21.2	
	8H	20.0	20.6	20.5	21.1	21.5	19.6	20.2	20.1	20.7	21.2	
	12H	20.0	20.5	20.5	21.0	21.6	19.6	20.1	20.1	20.6	21.1	
12H	4H	19.6	20.3	20.0	20.7	21.2	19.3	20.0	19.7	20.5	20.9	
	6H	19.9	20.5	20.4	21.0	21.5	19.6	20.2	20.0	20.6	21.1	
	8H	20.0	20.5	20.5	21.0	21.5	19.6	20.1	20.1	20.6	21.1	
Variations with the observer position at spacings:												
S = 1.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.3					
1.5H		+ 0.2 / - 0.4					+ 0.2 / - 0.4					
2.0H		+ 0.3 / - 0.4					+ 0.3 / - 0.3					

CIE Pub.117, 28979 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 11.7)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-02-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:219.17V I:0.9283A P:199.99W PF:0.9830 Freq:50.09Hz Lamp Flux:28978.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	55	45	39	32
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	66	58	75	65	58	73	66	57	50
1.25	84	73	66	82	73	66	79	71	65	58
1.50	89	79	72	87	78	72	84	76	70	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	74
3.00	103	96	91	100	94	89	96	91	87	78
4.00	106	101	97	104	99	95	99	95	92	83
5.00	109	104	100	106	102	99	101	98	95	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-02-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.17V I:0.9283A P:199.99W PF:0.9830 Freq:50.09Hz Lamp Flux:28978.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

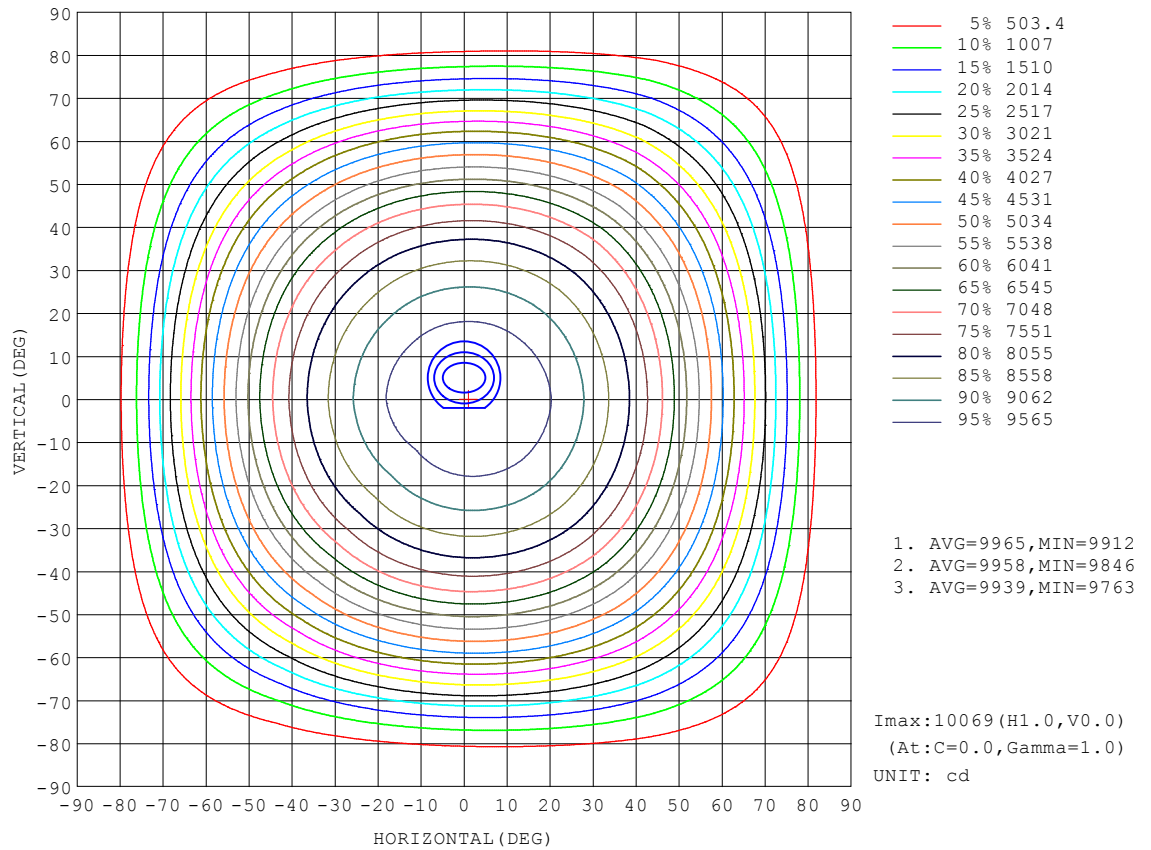


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-02-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.17V I:0.9283A P:199.99W PF:0.9830 Freq:50.09Hz Lamp Flux:28978.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

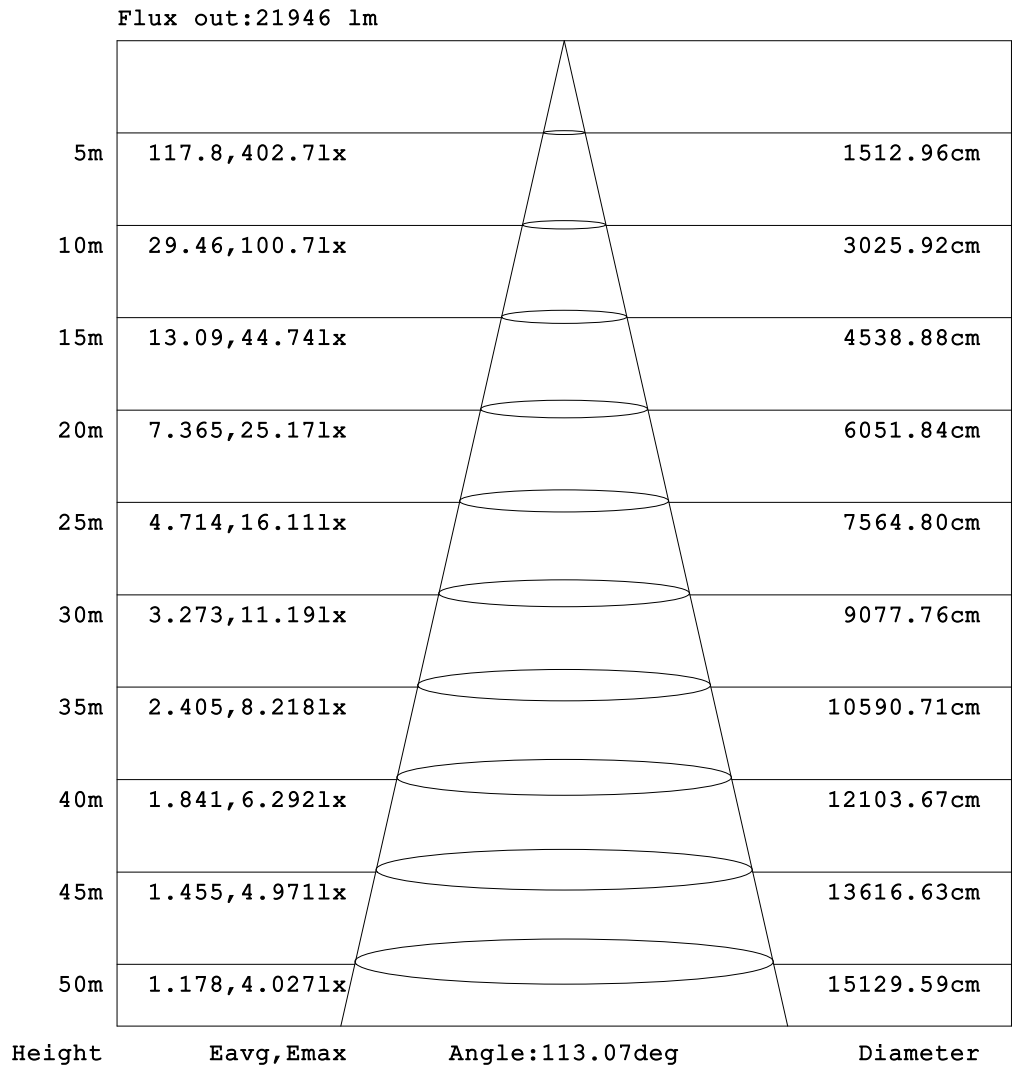


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-02-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:219.17V I:0.9283A P:199.99W PF:0.9830 Freq:50.09Hz Lamp Flux:28978.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

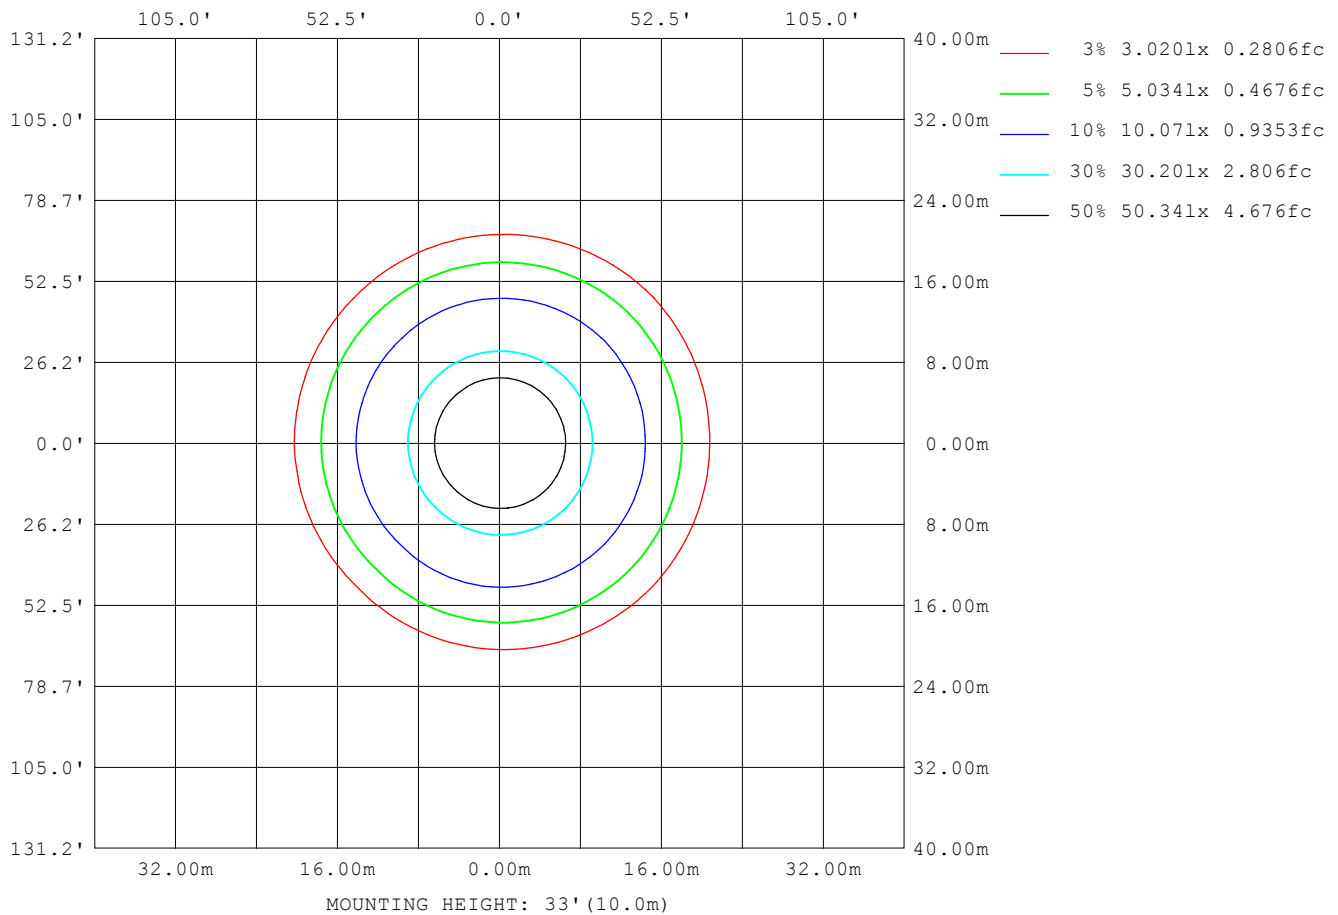

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-02-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:219.17V I:0.9283A P:199.99W PF:0.9830 Freq:50.09Hz Lamp Flux:28978.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	79926
L_0~180 (75) av	53003
L_0~180 (85) av	19160
L_90~270 (65) av	79599
L_90~270 (75) av	52460
L_90~270 (85) av	18788
L_45 (65) av	79598
L_45 (75) av	52931
L_45 (85) av	20676

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-02-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

Planar Illuminance Curve

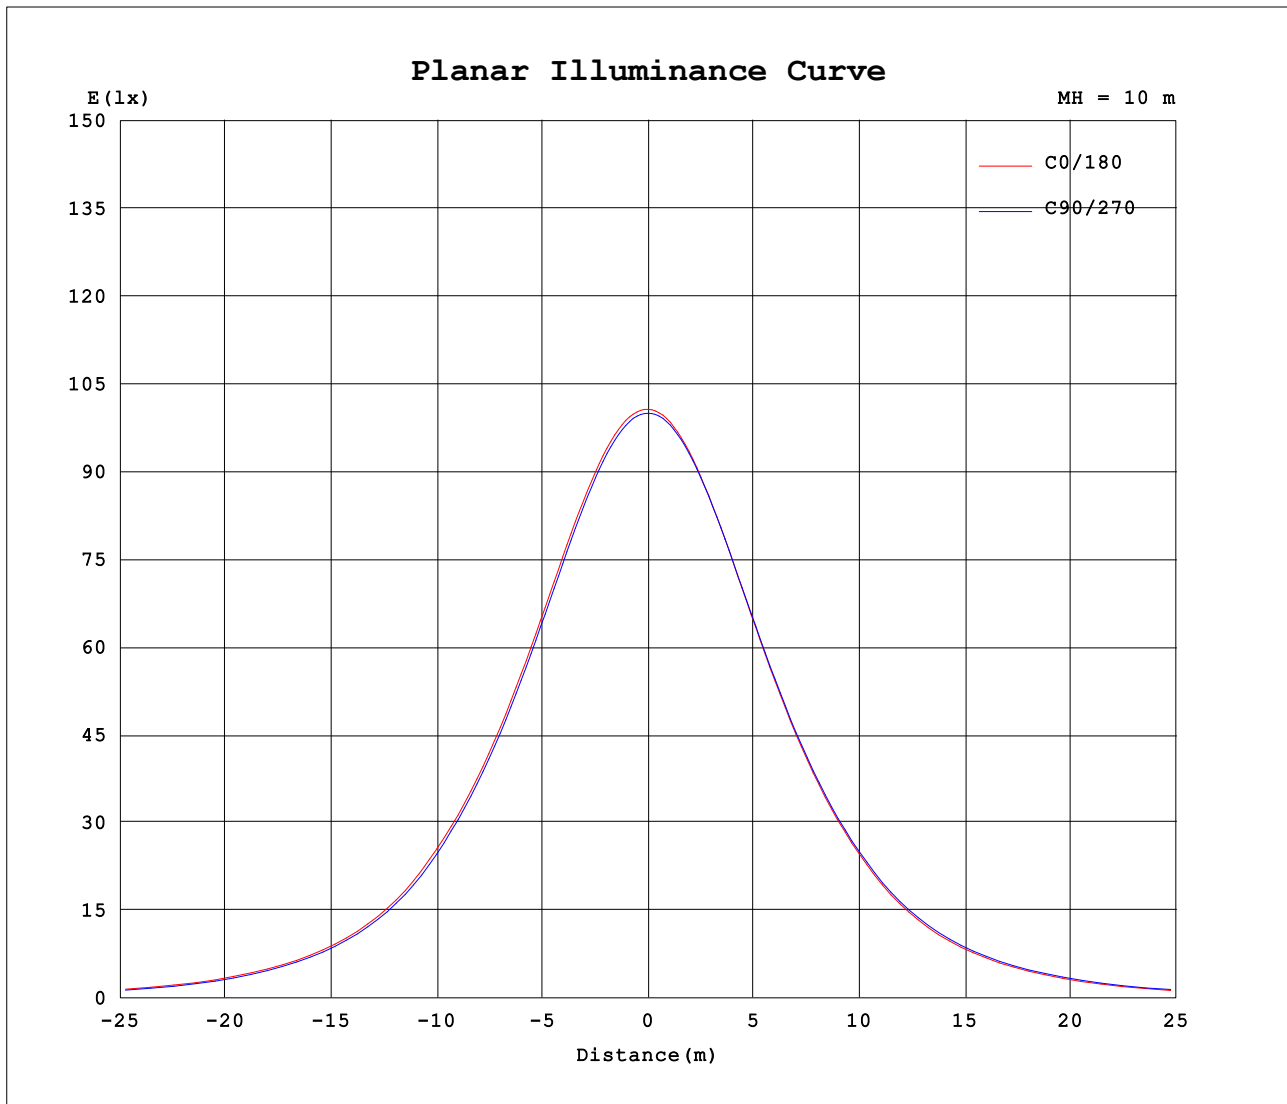

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-02-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.17V I:0.9283A P:199.99W PF:0.9830 Freq:50.09Hz Lamp Flux:28978.9x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1007	1003	1000	998	1007	1003	1000	998										
5	1005	1002	997	993	1003	999	997	997										
10	997	993	987	981	991	988	987	989										
15	981	977	969	962	972	970	971	974										
20	958	953	944	935	946	943	946	951										
25	927	922	912	901	912	910	914	921										
30	889	884	872	859	871	869	875	884										
35	843	838	825	809	822	820	828	839										
40	788	783	769	751	764	764	773	786										
45	724	718	699	678	698	698	710	725										
50	635	630	612	590	609	610	624	642										
55	548	544	525	503	518	521	536	556										
60	458	453	434	409	426	429	446	466										
65	355	350	329	305	320	324	344	366										
70	254	249	227	201	219	222	242	265										
75	153	150	130	110	121	125	142	163										
80	72.4	70.0	57.2	44.2	47.1	49.3	61.1	77.0										
85	24.7	23.3	18.4	15.7	8.69	10.8	14.4	22.4										
90	14.0	14.0	13.9	13.8	4.96	4.96	4.97	5.10										
95	13.8	13.8	13.7	13.6	5.08	5.07	5.04	4.98										
100	13.6	13.6	13.5	13.4	5.30	5.27	5.22	5.15										
105	13.5	13.4	13.3	13.3	5.57	5.53	5.47	5.38										
110	13.4	13.3	13.2	13.2	5.85	5.82	5.74	5.66										
115	13.4	13.3	13.2	13.2	6.14	6.10	6.02	5.94										
120	13.4	13.3	13.3	13.3	6.43	6.38	6.31	6.22										
125	13.5	13.4	13.4	13.4	6.76	6.70	6.61	6.52										
130	13.6	13.6	13.5	13.6	7.12	7.06	6.96	6.86										
135	13.8	13.8	13.7	13.8	7.58	7.51	7.39	7.26										
140	14.0	14.0	13.9	13.9	8.15	8.06	7.93	7.78										
145	14.2	14.2	14.1	14.1	8.84	8.75	8.59	8.42										
150	14.5	14.4	14.3	14.3	9.68	9.57	9.40	9.21										
155	14.7	14.6	14.5	14.5	10.6	10.5	10.3	10.1										
160	14.9	14.8	14.7	14.7	11.6	11.5	11.3	11.1										
165	15.0	14.9	14.8	14.7	12.6	12.4	12.3	12.1										
170	14.9	14.9	14.7	14.7	13.3	13.2	13.0	12.9										
175	14.7	14.6	14.5	14.4	13.9	13.8	13.7	13.5										
180	14.4	14.3	14.1	14.0	14.4	14.3	14.2	14.0										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-02-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks: