


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:218.32V I:1.1354A P:241.96W PF:0.9761 Freq:49.99Hz Lamp Flux:36684.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 151.62 lm/W			
MODEL	HB02-240W	I _{max} (cd)	12600	S/MH (C0/180)	1.30
NOMINAL POWER(W)	240W	LOR(%)	100.0	S/MH (C90/270)	1.30
RATED VOLTAGE(V)		TOTAL FLUX(lm)	36685	η UP,DN(C0-180)	1.2,48.1
NOMINAL FLUX(lm)	36684.6	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.0,49.7
LAMPS INSIDE	1	η up (%)	2.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	0	η down (%)	97.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

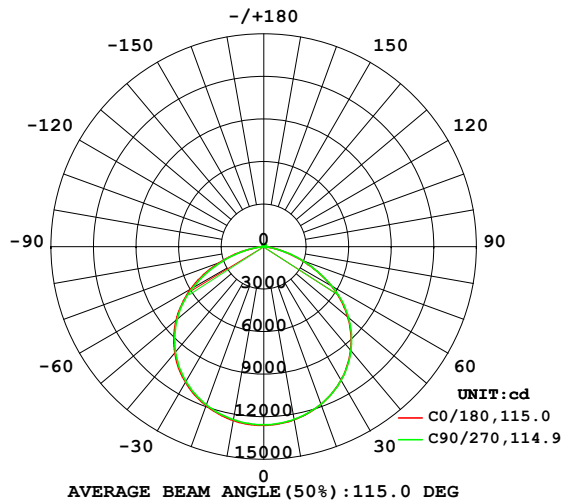

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

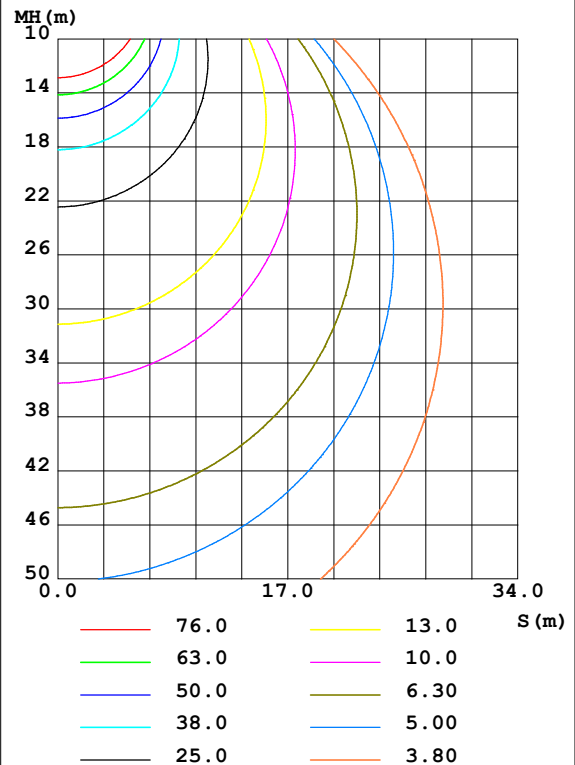

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-03-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1239	1238	1237	1236	1245	1241	1239	1237	0- 10	1191	1191	3.25, 3.25
20	1182	1182	1182	1182	1193	1189	1187	1184	10- 20	3436	4627	12.6, 12.6
30	1088	1089	1090	1092	1105	1100	1098	1094	20- 30	5278	9905	27, 27
40	953.5	955.4	957.5	960.0	977.2	971.6	969.0	964.6	30- 40	6469	16374	44.6, 44.6
50	774.0	777.0	780.7	784.2	806.4	799.6	797.6	792.6	40- 50	6796	23170	63.2, 63.2
60	548.1	553.8	550.1	555.0	593.0	585.5	577.9	569.4	50- 60	6104	29274	79.8, 79.8
70	286.6	293.5	293.1	295.8	334.5	329.3	319.1	312.5	60- 70	4324	33598	91.6, 91.6
80	62.06	65.44	69.48	72.70	91.31	86.61	85.55	82.20	70- 80	1968	35567	97, 97
90	13.75	13.80	13.72	13.78	7.179	7.165	7.137	7.127	80- 90	301.7	35868	97.8, 97.8
100	12.05	12.07	12.24	12.32	7.839	7.838	7.970	7.985	90-100	110.1	35978	98.1, 98.1
110	11.91	11.90	11.88	11.86	9.571	9.582	9.630	9.652	100-110	109.0	36087	98.4, 98.4
120	12.75	12.74	12.67	12.60	11.62	11.64	11.63	11.65	110-120	113.3	36201	98.7, 98.7
130	14.01	13.98	13.92	13.85	13.70	13.72	13.72	13.73	120-130	116.3	36317	99, 99
140	15.50	15.46	15.39	15.33	15.56	15.56	15.54	15.53	130-140	113.4	36430	99.3, 99.3
150	16.96	16.93	16.86	16.80	17.10	17.09	17.07	17.05	140-150	101.9	36532	99.6, 99.6
160	18.21	18.18	18.12	18.07	18.25	18.22	18.21	18.18	150-160	81.32	36614	99.8, 99.8
170	19.10	19.08	19.02	18.99	19.05	19.02	19.01	18.96	160-170	52.71	36666	100, 100
180	19.40	19.39	19.34	19.31	19.43	19.38	19.36	19.30	170-180	18.31	36685	100, 100
DEG	LUMINOUS INTENSITY: $\times 10\text{cd}$									UNIT: lm		

Conical surface Flux(90deg): 19792 lm

%lum = 54.0%

%lamp = 54.0%

Conical surface Flux(120deg): 29274 lm

%lum = 79.8%


%lamp = 79.8%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:218.32V I:1.1354A P:241.96W PF:0.9761 Freq:49.99Hz Lamp Flux:36684.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

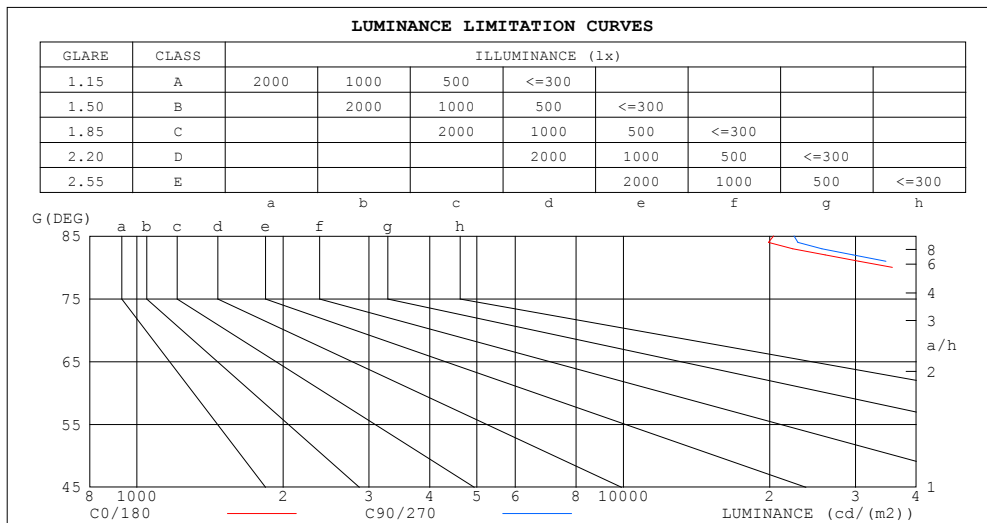

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	20369	22425
80	35741	40012
75	62676	66611
70	83792	85690
65	98505	99401
60	109629	110010
55	116429	117700
50	120415	121463
45	122944	123732


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-03-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:218.32V I:1.1354A P:241.96W PF:0.9761 Freq:49.99Hz Lamp Flux:36684.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.04	1.00	.97	1.02	.98	.95	.97	.94	.91	.93	.91	.88	.89	.87	.85	.83
2.0	.91	.85	.79	.89	.83	.78	.85	.80	.76	.82	.77	.74	.78	.75	.72	.70
3.0	.80	.72	.66	.78	.71	.65	.75	.69	.64	.72	.67	.62	.69	.65	.61	.59
4.0	.71	.62	.56	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.48	.62	.54	.48	.60	.52	.47	.58	.51	.46	.55	.50	.45	.43
6.0	.57	.48	.42	.56	.48	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.52	.43	.37	.51	.42	.37	.49	.42	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.39	.33	.46	.38	.33	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.35	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.40	.32	.27	.39	.32	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

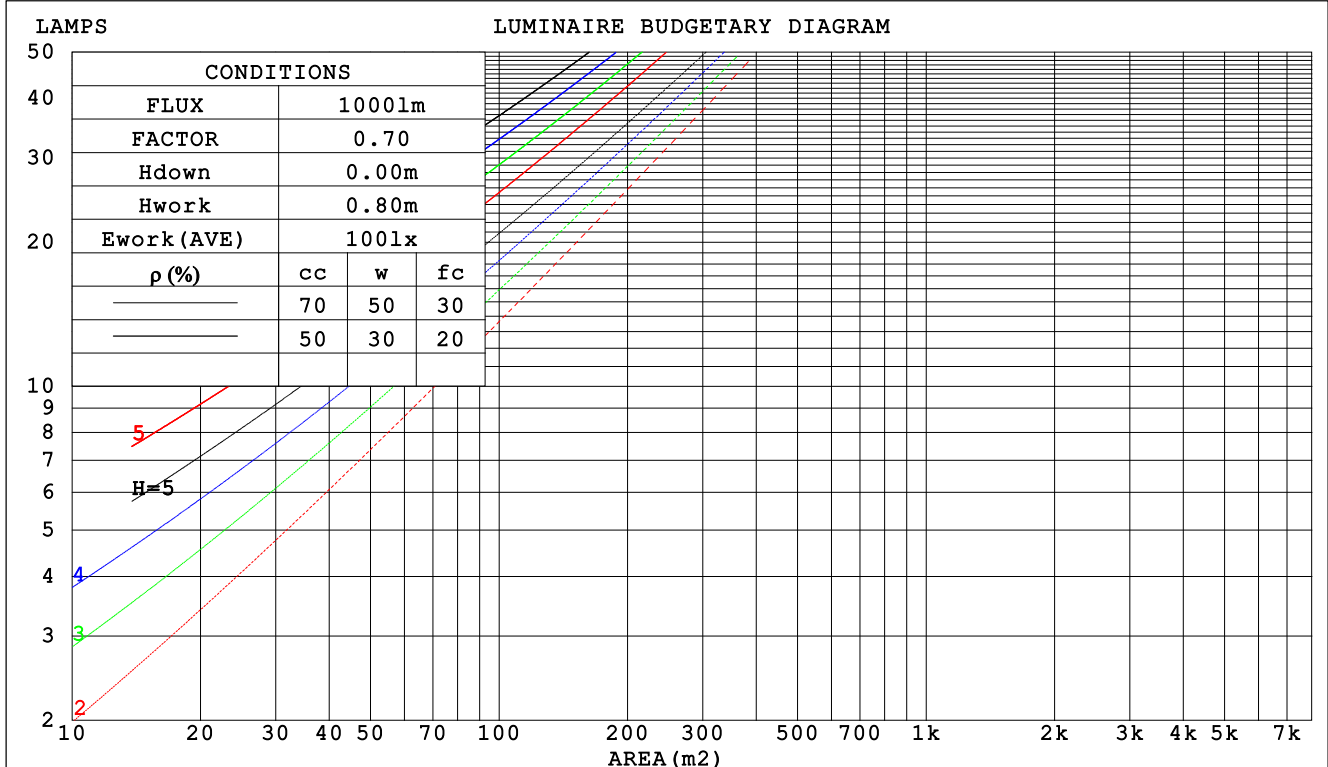

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:218.32V I:1.1354A P:241.96W PF:0.9761 Freq:49.99Hz Lamp Flux:36684.6x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.: EVERFINE		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.291	.166	.052	.283	.162	.051	.269	.154	.049	.256	.147	.047	.243	.141	.045		
2.0	.280	.153	.047	.273	.150	.046	.260	.145	.045	.248	.139	.044	.237	.134	.042		
3.0	.262	.139	.042	.256	.137	.041	.244	.132	.040	.234	.128	.039	.224	.124	.038		
4.0	.243	.126	.037	.238	.124	.037	.228	.121	.036	.218	.117	.035	.210	.114	.035		
5.0	.226	.115	.033	.221	.114	.033	.212	.110	.033	.204	.107	.032	.196	.105	.031		
6.0	.210	.105	.030	.206	.104	.030	.198	.101	.030	.190	.099	.029	.183	.096	.029		
7.0	.196	.097	.027	.192	.096	.027	.185	.094	.027	.178	.091	.027	.172	.089	.026		
8.0	.184	.090	.025	.180	.089	.025	.174	.087	.025	.167	.085	.024	.162	.083	.024		
9.0	.172	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.152	.077	.022		
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.144	.073	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.207	.207	.207	.177	.177	.177	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.196	.173	.153	.168	.149	.132	.115	.102	.091	.066	.059	.053	.021	.019	.017	
2.0	.188	.149	.117	.161	.128	.101	.110	.089	.070	.064	.052	.041	.020	.017	.013	
3.0	.180	.132	.093	.154	.113	.080	.106	.079	.056	.061	.046	.033	.020	.015	.011	
4.0	.173	.118	.077	.148	.102	.067	.102	.071	.047	.059	.042	.028	.019	.014	.009	
5.0	.166	.108	.065	.142	.093	.057	.098	.065	.040	.057	.038	.024	.018	.012	.008	
6.0	.159	.100	.057	.136	.086	.050	.094	.060	.035	.055	.035	.021	.018	.012	.007	
7.0	.152	.093	.051	.131	.080	.045	.090	.056	.032	.052	.033	.019	.017	.011	.006	
8.0	.146	.087	.047	.125	.075	.041	.087	.053	.029	.050	.031	.017	.016	.010	.006	
9.0	.140	.082	.043	.120	.071	.038	.083	.050	.027	.049	.030	.016	.016	.010	.005	
10.0	.134	.078	.040	.116	.068	.035	.080	.047	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:218.32V I:1.1354A P:241.96W PF:0.9761 Freq:49.99Hz Lamp Flux:36684.6x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	29.3	30.8	29.6	31.0	31.2	29.3	30.8	29.6	31.0	31.3
3H	30.4	31.8	30.8	32.1	32.3	30.5	31.8	30.8	32.1	32.4
4H	30.7	32.0	31.1	32.3	32.6	30.8	32.1	31.2	32.4	32.7
6H	30.8	32.0	31.2	32.3	32.6	30.9	32.1	31.3	32.4	32.7
8H	30.8	31.9	31.2	32.3	32.6	30.9	32.0	31.3	32.4	32.7
12H	30.7	31.9	31.1	32.2	32.5	30.9	32.0	31.2	32.3	32.6
4H 2H	29.8	31.1	30.2	31.4	31.7	29.8	31.1	30.2	31.4	31.7
3H	31.1	32.2	31.5	32.5	32.9	31.1	32.3	31.5	32.6	32.9
4H	31.5	32.5	31.9	32.9	33.2	31.6	32.6	32.0	32.9	33.3
6H	31.6	32.5	32.0	32.9	33.3	31.7	32.6	32.1	33.0	33.4
8H	31.6	32.4	32.0	32.8	33.3	31.7	32.5	32.1	32.9	33.4
12H	31.6	32.3	32.0	32.8	33.2	31.7	32.4	32.1	32.9	33.3
8H 4H	31.6	32.4	32.0	32.8	33.2	31.6	32.5	32.1	32.9	33.3
6H	31.8	32.4	32.2	32.9	33.4	31.9	32.5	32.3	33.0	33.5
8H	31.8	32.4	32.3	32.8	33.3	31.9	32.5	32.4	32.9	33.4
12H	31.8	32.3	32.3	32.8	33.3	31.9	32.4	32.4	32.9	33.4
12H 4H	31.5	32.3	32.0	32.7	33.2	31.6	32.4	32.1	32.8	33.2
6H	31.7	32.3	32.2	32.8	33.3	31.8	32.4	32.3	32.9	33.4
8H	31.8	32.3	32.3	32.8	33.3	31.9	32.4	32.4	32.9	33.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.5					+ 0.2 / - 0.4				
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4				

CIE Pub.117, 36685 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 12.5$)
Area: 0.1 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:218.32V I:1.1354A P:241.96W PF:0.9761 Freq:49.99Hz Lamp Flux:36684.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	56	45	39	55	45	38	32
0.80	67	56	49	66	55	48	64	55	48	41
1.00	76	65	58	75	65	58	72	66	57	50
1.25	83	73	66	82	72	66	79	71	65	57
1.50	88	79	72	87	78	71	83	76	70	62
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	99	95	92	83
5.00	109	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.32V I:1.1354A P:241.96W PF:0.9761 Freq:49.99Hz Lamp Flux:36684.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

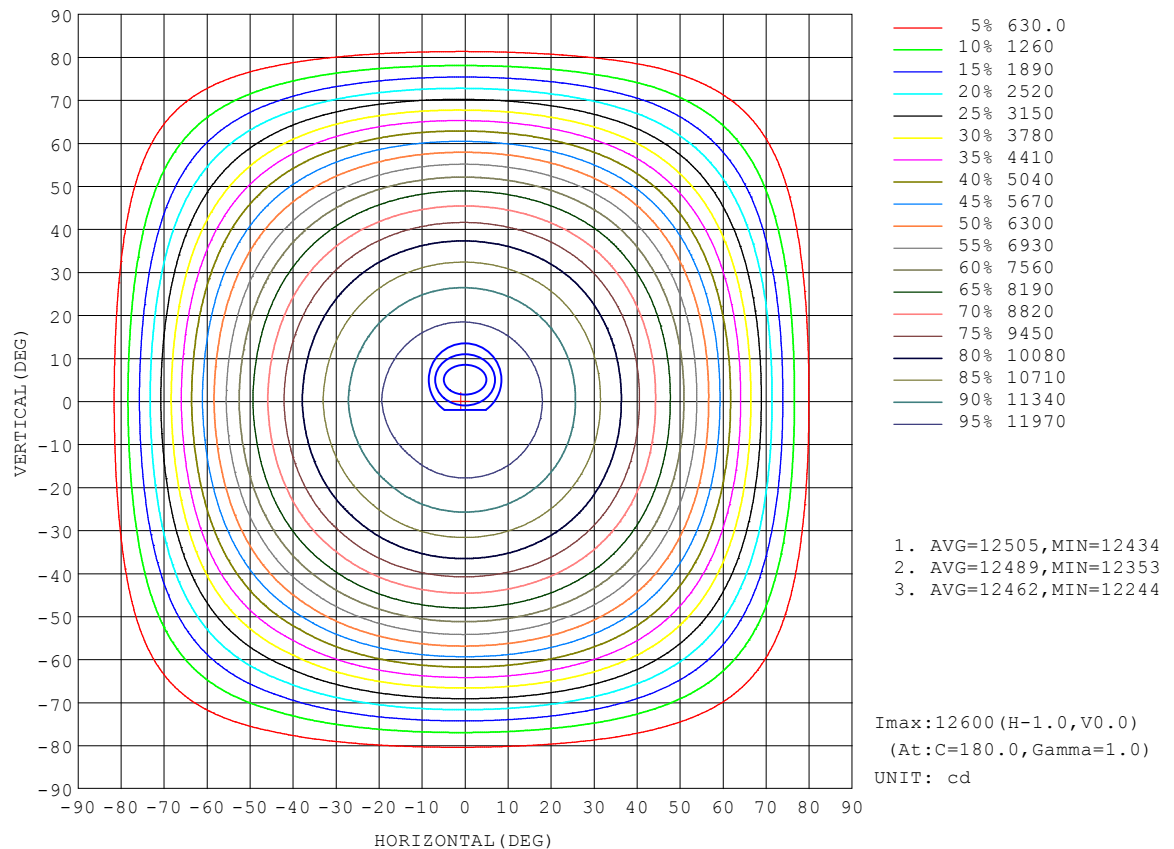


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.32V I:1.1354A P:241.96W PF:0.9761 Freq:49.99Hz Lamp Flux:36684.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Flux out:28162 lm

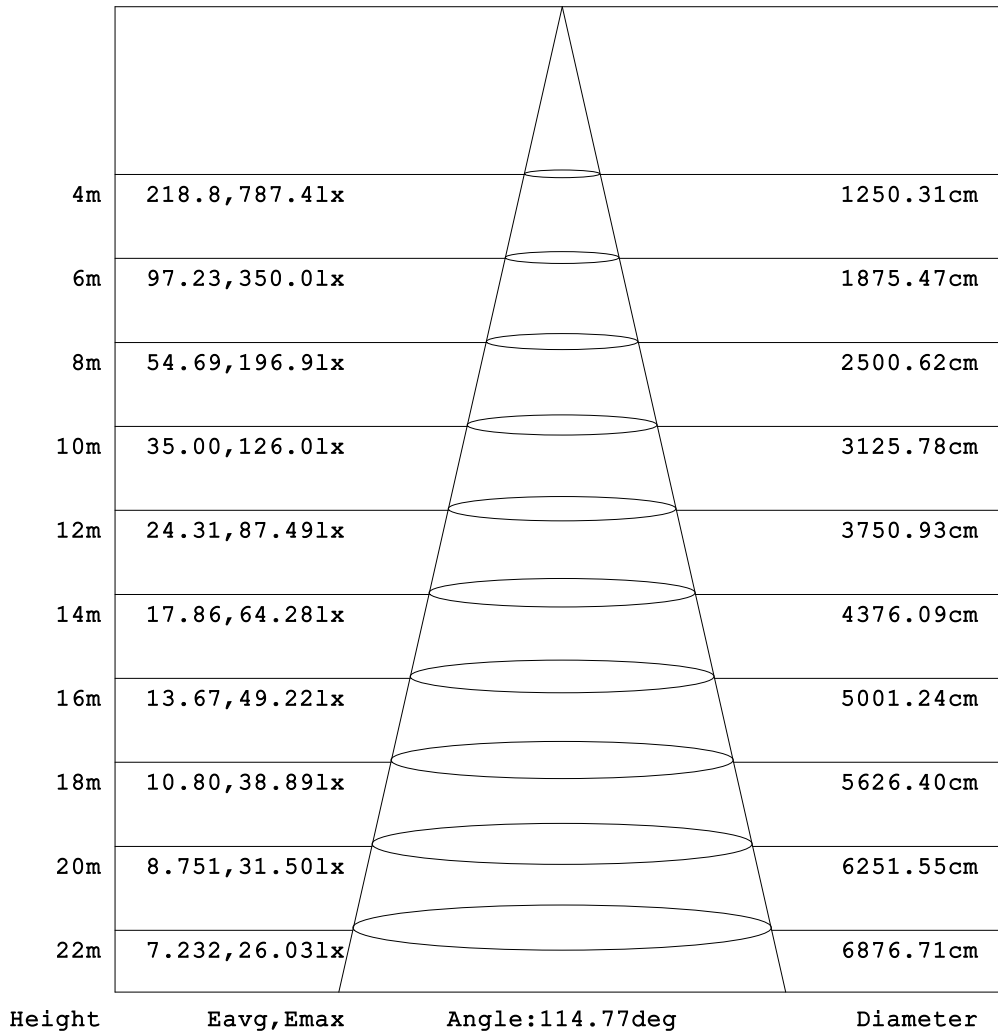


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.200m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:218.32V I:1.1354A P:241.96W PF:0.9761 Freq:49.99Hz Lamp Flux:36684.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

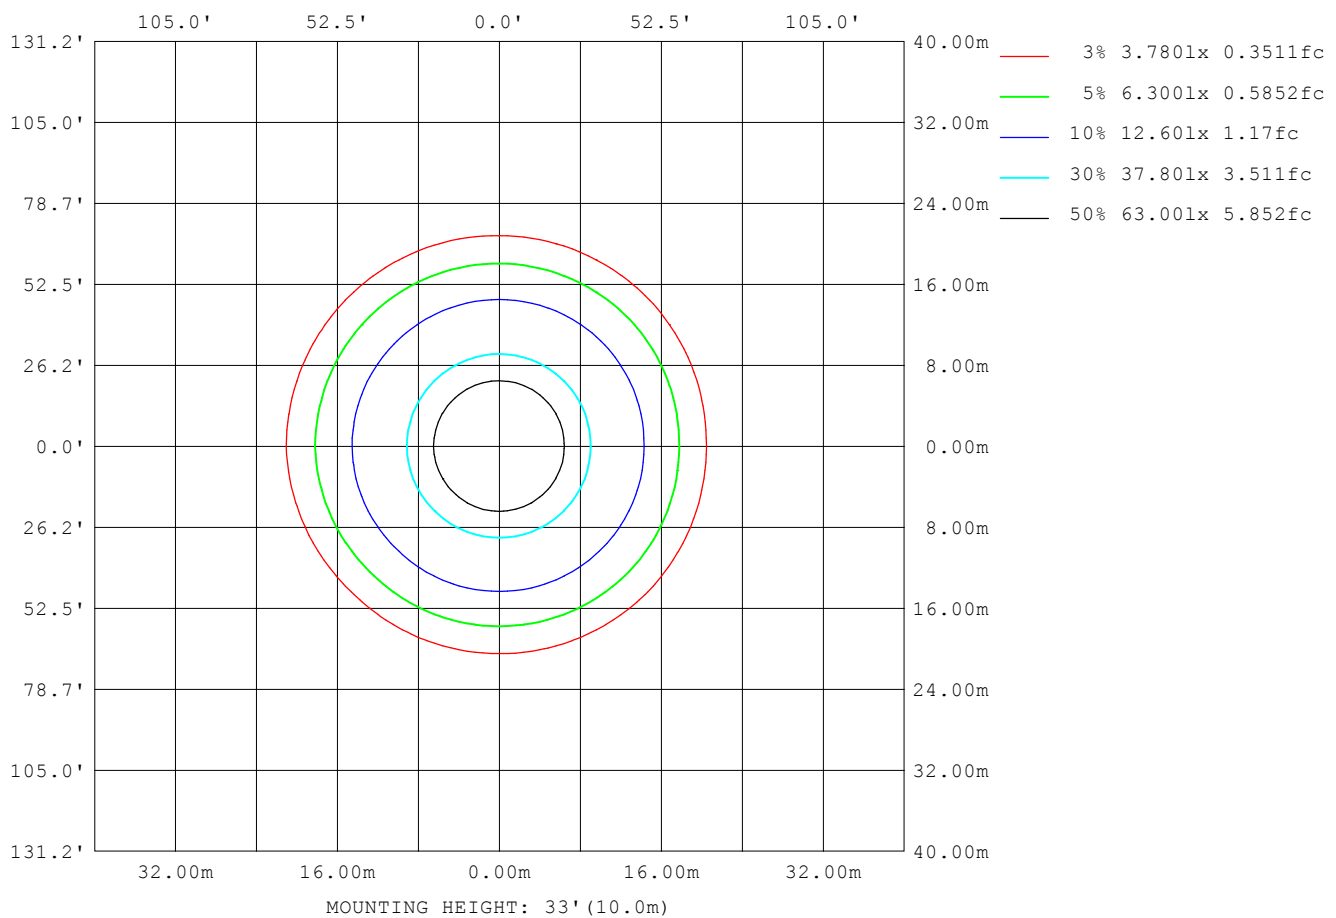

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-03-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:218.32V I:1.1354A P:241.96W PF:0.9761 Freq:49.99Hz Lamp Flux:36684.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	104612
L_0~180 (75) av	71507
L_0~180 (85) av	22119
L_90~270 (65) av	102590
L_90~270 (75) av	71580
L_90~270 (85) av	22276
L_45 (65) av	103449
L_45 (75) av	71087
L_45 (85) av	21421

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

Planar Illuminance Curve

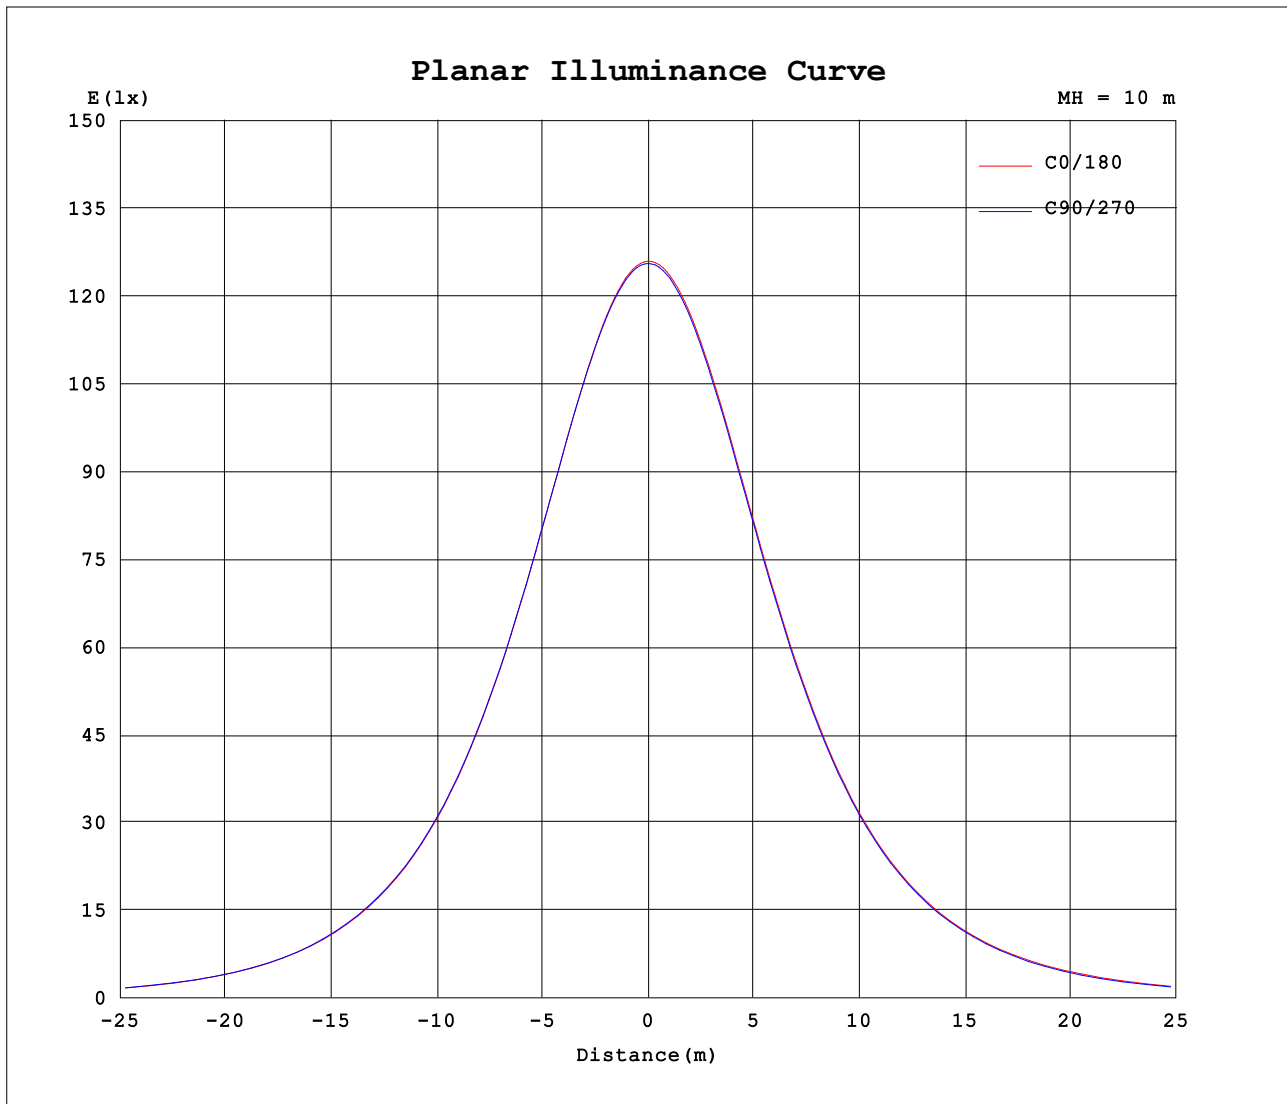

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-03-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.32V I:1.1354A P:241.96W PF:0.9761 Freq:49.99Hz Lamp Flux:36684.6x1 lm									
NAME:					TYPE:			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.: EVERFINE					SUR.:			Shielding Angle:	

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1260	1258	1256	1255	1260	1258	1256	1255										
5	1254	1252	1251	1250	1257	1254	1252	1250										
10	1239	1238	1237	1236	1245	1241	1239	1237										
15	1215	1215	1214	1214	1223	1220	1217	1215										
20	1182	1182	1182	1182	1193	1189	1187	1184										
25	1140	1141	1141	1142	1154	1150	1147	1144										
30	1088	1089	1090	1092	1105	1100	1098	1094										
35	1026	1028	1029	1031	1046	1041	1038	1034										
40	953	955	958	960	977	972	969	965										
45	869	872	875	878	898	891	889	884										
50	774	777	781	784	806	800	798	793										
55	668	671	675	679	705	698	695	690										
60	548	554	550	555	593	585	578	569										
65	416	425	420	423	468	461	447	440										
70	287	293	293	296	334	329	319	312										
75	162	168	172	175	208	201	198	192										
80	62.1	65.4	69.5	72.7	91.3	86.6	85.6	82.2										
85	17.8	16.9	19.5	19.7	20.8	18.9	19.3	19.2										
90	13.7	13.8	13.7	13.8	7.18	7.17	7.14	7.13										
95	12.7	12.7	12.7	12.7	7.32	7.32	7.32	7.32										
100	12.1	12.1	12.2	12.3	7.84	7.84	7.97	7.98										
105	11.8	11.8	11.8	11.9	8.60	8.61	8.76	8.78										
110	11.9	11.9	11.9	11.9	9.57	9.58	9.63	9.65										
115	12.3	12.3	12.2	12.1	10.6	10.6	10.6	10.6										
120	12.8	12.7	12.7	12.6	11.6	11.6	11.6	11.7										
125	13.3	13.3	13.3	13.2	12.6	12.7	12.7	12.7										
130	14.0	14.0	13.9	13.9	13.7	13.7	13.7	13.7										
135	14.7	14.7	14.6	14.6	14.7	14.7	14.7	14.7										
140	15.5	15.5	15.4	15.3	15.6	15.6	15.5	15.5										
145	16.3	16.2	16.1	16.1	16.4	16.4	16.3	16.3										
150	17.0	16.9	16.9	16.8	17.1	17.1	17.1	17.0										
155	17.6	17.6	17.5	17.5	17.7	17.7	17.7	17.7										
160	18.2	18.2	18.1	18.1	18.2	18.2	18.2	18.2										
165	18.7	18.7	18.6	18.6	18.7	18.7	18.7	18.6										
170	19.1	19.1	19.0	19.0	19.1	19.0	19.0	19.0										
175	19.3	19.3	19.3	19.2	19.3	19.3	19.2	19.2										
180	19.4	19.4	19.3	19.3	19.4	19.4	19.4	19.3										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: