


室内灯具光度数据

实测参数: U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz 实检光通:16824.5x1 lm					
灯具名称:		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面:		遮光角:	

光源数据		光度数据				光效: 166.59 lm/W
型号		峰值光强 (cd)	7077	S/MH (C0/180)	1.28	
标称功率 (W)	100	灯具效率 (%)	100.0	S/MH (C90/270)	1.28	
额定电源电压 (V)	220	总光通量 (lm)	16825	η UP, DN (C0-180)	1.6, 44.9	
额定光通量 (lm)	16824.5	CIE分类	直接	η UP, DN (C180-360)	0.8, 52.7	
灯具内光源数 (只)	1	上射光通比 (%)	2.4	CIBSE SHR NOM	1.25	
实测电源电压 (V)	220	下射光通比 (%)	97.6	CIBSE SHR MAX	1.35	

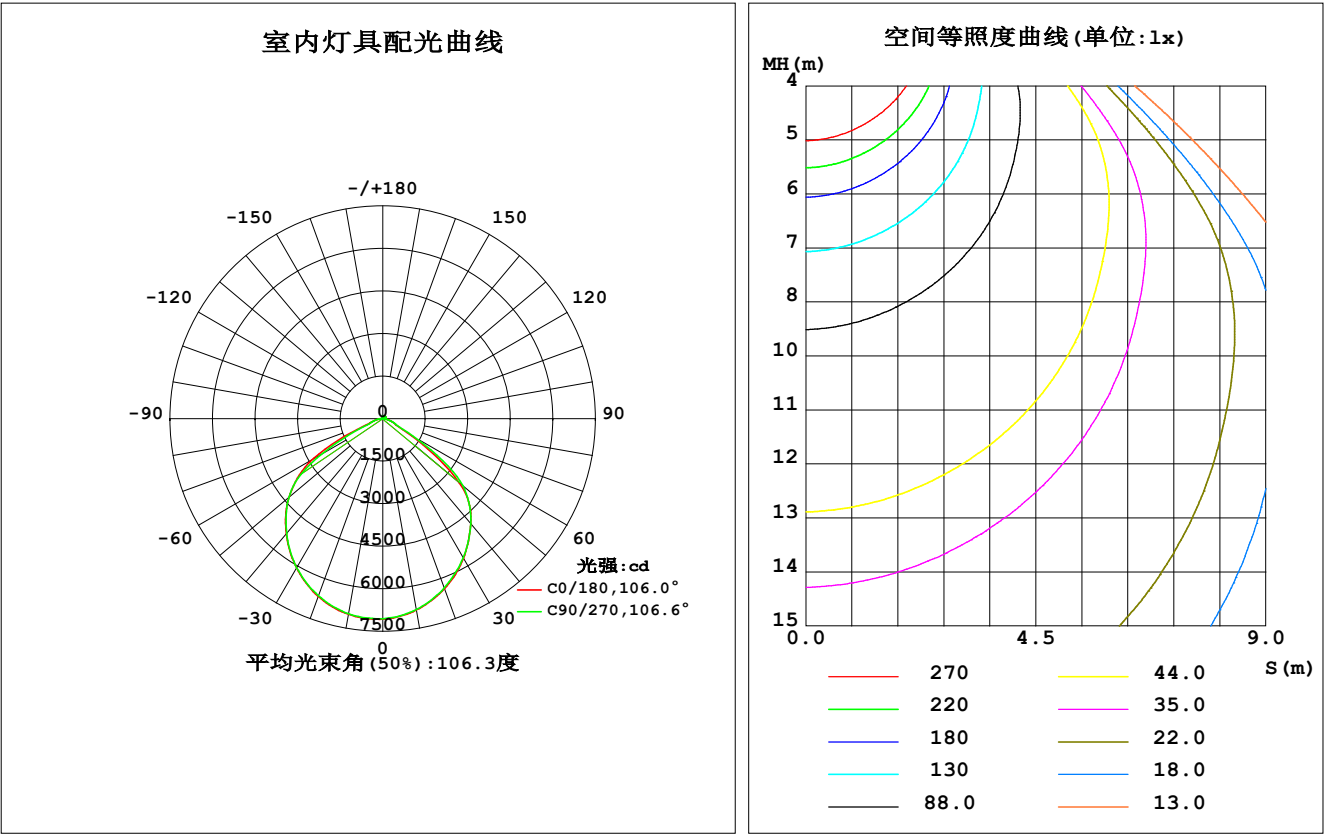

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	$\Phi_{\text{环}}$	$\Phi_{\text{总}}$	%lum, lamp
10	6846	6829	6835	6859	7007	7004	6983	6955	0- 10	666.8	666.8	3.96, 3.96
20	6379	6340	6348	6408	6672	6668	6640	6593	10- 20	1901	2568	15.3, 15.3
30	5694	5649	5671	5729	6081	6081	6072	6003	20- 30	2863	5431	32.3, 32.3
40	4829	4819	4830	4883	5298	5298	5277	5205	30- 40	3429	8861	52.7, 52.7
50	3530	3565	3684	3755	4316	4326	4319	4248	40- 50	3517	12378	73.6, 73.6
60	987.9	1044	1249	1551	2819	2749	2442	2085	50- 60	2677	15055	89.5, 89.5
70	376.2	373.5	384.8	409.9	530.5	511.8	475.3	444.6	60- 70	959.5	16015	95.2, 95.2
80	139.9	130.6	127.5	131.9	186.1	194.5	192.8	181.5	70- 80	307.2	16322	97, 97
90	82.27	82.16	82.18	82.17	24.28	24.84	25.83	25.60	80- 90	98.08	16420	97.6, 97.6
100	81.83	81.80	81.60	81.35	25.80	25.80	26.08	26.44	90-100	58.11	16478	97.9, 97.9
110	83.43	83.56	83.44	83.17	30.18	30.20	30.55	31.05	100-110	58.48	16536	98.3, 98.3
120	86.32	86.40	86.16	85.72	36.23	36.30	36.70	37.17	110-120	58.58	16595	98.6, 98.6
130	89.54	89.66	89.40	89.03	43.14	43.21	43.55	43.91	120-130	57.30	16652	99, 99
140	93.45	93.41	92.95	92.43	49.35	49.35	49.59	49.93	130-140	53.25	16705	99.3, 99.3
150	98.61	98.45	98.03	97.61	57.21	57.31	57.94	58.68	140-150	46.63	16752	99.6, 99.6
160	102.1	102.0	101.9	101.9	70.15	70.27	70.98	71.88	150-160	37.94	16790	99.8, 99.8
170	101.6	101.6	101.5	101.7	84.65	84.64	85.33	86.22	160-170	25.44	16815	99.9, 99.9
180	95.95	95.99	96.39	96.92	96.26	95.94	96.57	96.87	170-180	9.054	16825	100, 100
单位: $^{\circ}$	光强: cd									单位: lm		

锥面光通量(90度): 10645 lm

%lum = 63.3%

%lamp = 63.3%

锥面光通量(120度): 15055 lm

%lum = 89.5%


%lamp = 89.5%

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数: U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz 实检光通:16824.5x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

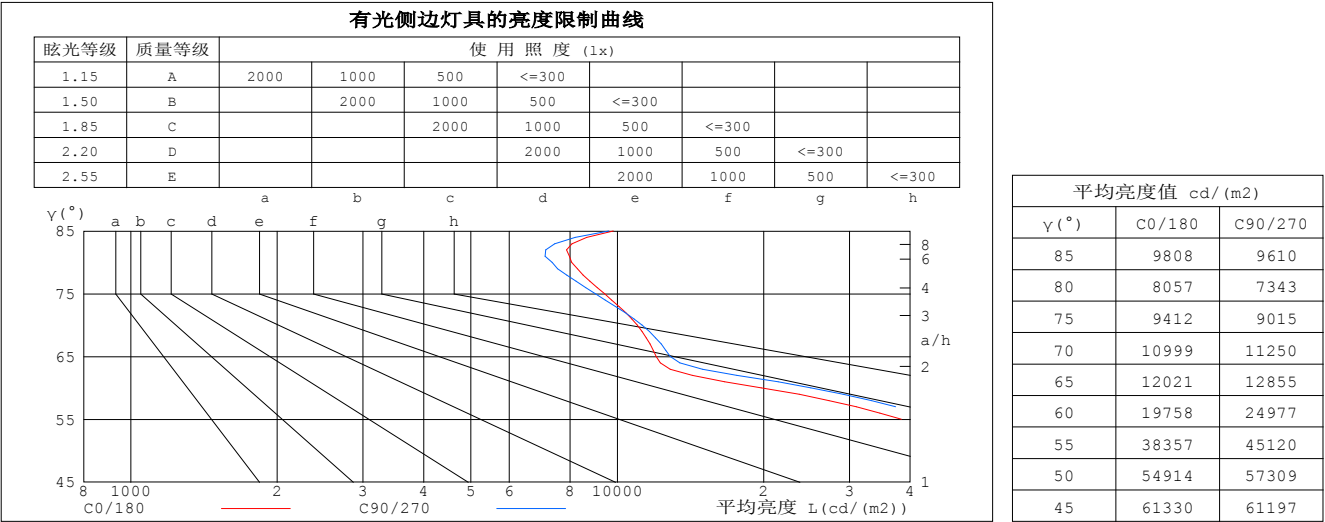


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:DAMIN
测试日期:2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.850米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz 实检光通:16824.5x1 lm															
灯具名称:				灯具类型:				灯具重量:							
灯具规格:				外型尺寸:				测试编号:							
制造厂商: EVERFINE				发光口面:				遮光角:							

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.06	1.03	.00	1.04	1.01	.98	.99	.97	.94	.95	.93	.91	.91	.89	.88	.86
2.0	.95	.89	.84	.93	.87	.83	.89	.84	.80	.85	.82	.78	.82	.79	.76	.74
3.0	.84	.77	.71	.83	.76	.71	.79	.74	.69	.76	.72	.68	.74	.70	.66	.64
4.0	.76	.68	.62	.74	.67	.61	.71	.65	.60	.69	.63	.59	.66	.62	.58	.56
5.0	.68	.60	.54	.67	.59	.53	.64	.58	.53	.62	.56	.52	.60	.55	.51	.49
6.0	.61	.53	.47	.60	.53	.47	.58	.52	.46	.57	.51	.46	.55	.49	.45	.43
7.0	.56	.48	.42	.55	.47	.42	.53	.46	.41	.52	.46	.41	.50	.45	.40	.39
8.0	.51	.43	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.46	.41	.36	.35
9.0	.47	.39	.34	.46	.39	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.31
10.0	.43	.36	.31	.43	.36	.31	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28

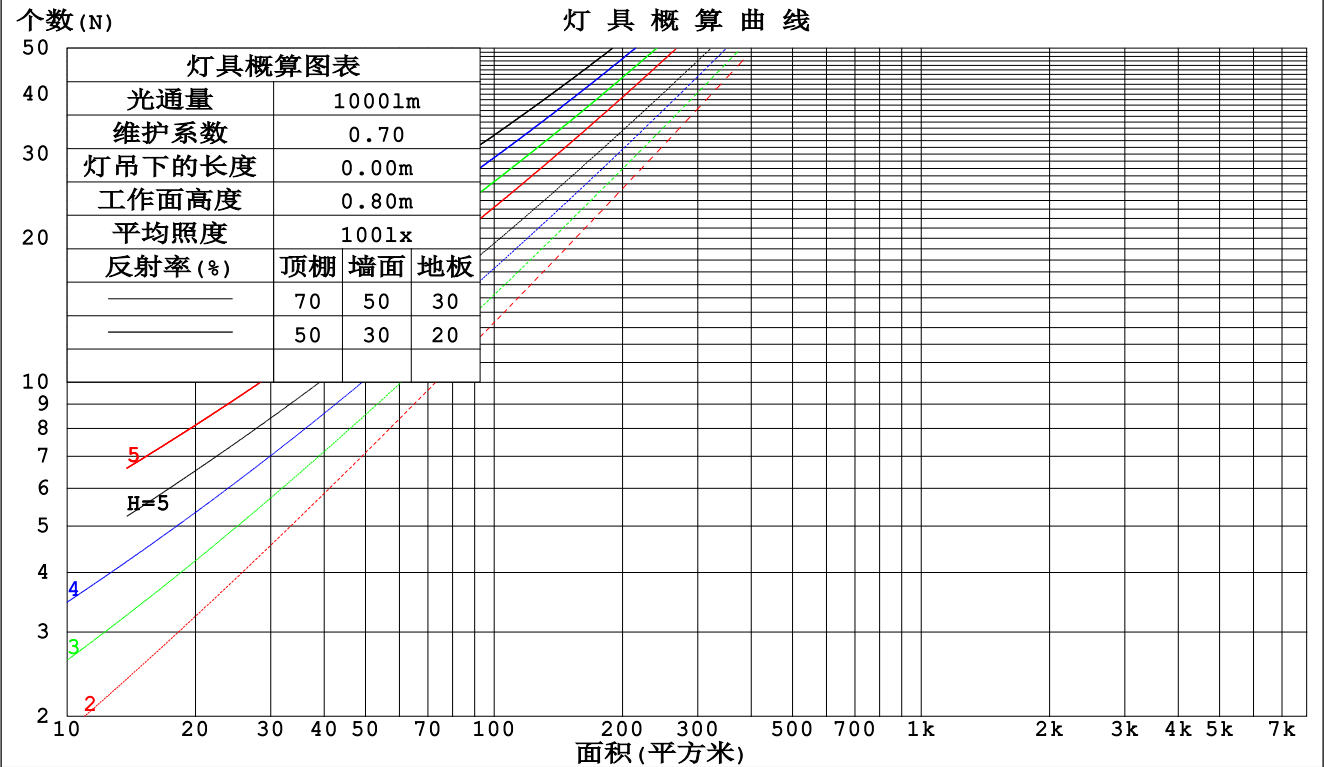

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz 实检光通:16824.5x1 lm					
灯具名称:		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面:		遮光角:	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.254	.144	.046	.246	.140	.045	.232	.133	.042	.218	.126	.040	.206	.120	.039	
2.0	.247	.135	.041	.240	.132	.041	.227	.126	.039	.216	.121	.038	.205	.116	.037	
3.0	.234	.125	.037	.228	.122	.037	.217	.118	.036	.207	.113	.035	.198	.109	.034	
4.0	.221	.115	.034	.216	.113	.033	.206	.109	.033	.197	.106	.032	.188	.102	.031	
5.0	.208	.106	.031	.203	.104	.030	.195	.101	.030	.186	.098	.029	.179	.095	.029	
6.0	.196	.098	.028	.191	.097	.028	.184	.094	.027	.176	.092	.027	.169	.089	.026	
7.0	.184	.091	.026	.180	.090	.026	.173	.088	.025	.167	.085	.025	.160	.083	.024	
8.0	.174	.085	.024	.170	.084	.024	.164	.082	.023	.158	.080	.023	.152	.078	.023	
9.0	.164	.079	.022	.161	.078	.022	.155	.077	.022	.150	.075	.021	.144	.073	.021	
10.0	.155	.074	.021	.152	.074	.021	.147	.072	.020	.142	.071	.020	.137	.069	.020	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.209	.209	.209	.178	.178	.178	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.195	.175	.157	.167	.150	.135	.114	.103	.094	.066	.060	.054	.021	.019	.018	
2.0	.185	.151	.122	.158	.130	.106	.108	.090	.074	.063	.052	.043	.020	.017	.014	
3.0	.176	.133	.098	.151	.115	.085	.104	.080	.060	.060	.046	.035	.019	.015	.012	
4.0	.169	.119	.081	.145	.103	.071	.100	.072	.050	.058	.042	.029	.019	.014	.010	
5.0	.162	.109	.069	.139	.094	.060	.096	.066	.043	.055	.039	.025	.018	.013	.008	
6.0	.155	.100	.061	.133	.087	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
7.0	.149	.093	.054	.128	.081	.047	.088	.057	.033	.051	.033	.020	.017	.011	.007	
8.0	.143	.087	.049	.123	.076	.043	.085	.053	.030	.050	.031	.018	.016	.010	.006	
9.0	.137	.082	.045	.118	.072	.040	.082	.050	.028	.048	.030	.017	.015	.010	.006	
10.0	.132	.078	.042	.114	.068	.037	.079	.048	.026	.046	.028	.016	.015	.009	.005	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz 实检光通:16824.5x1 lm											
灯具名称:			灯具类型:			灯具重量:					
灯具规格:			外型尺寸:			测试编号:					
制造厂商: EVERFINE			发光口面:			遮光角:					
反射比:	天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
	墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
	工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸		交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	2H	24.5	25.9	24.8	26.1	26.3	24.8	26.2	25.1	26.4	26.7
	3H	24.5	25.8	24.8	26.0	26.3	24.8	26.1	25.2	26.3	26.6
	4H	24.5	25.7	24.9	26.0	26.3	24.8	26.0	25.2	26.3	26.6
	6H	24.5	25.6	24.9	25.9	26.2	24.8	25.9	25.1	26.2	26.5
	8H	24.5	25.5	24.9	25.8	26.2	24.7	25.8	25.1	26.1	26.4
	12H	24.5	25.5	24.8	25.8	26.1	24.7	25.7	25.1	26.1	26.4
4H	2H	24.5	25.6	24.8	25.9	26.2	24.7	25.9	25.1	26.2	26.5
	3H	24.6	25.6	24.9	25.9	26.2	24.8	25.8	25.2	26.2	26.5
	4H	24.6	25.5	25.0	25.9	26.2	24.9	25.8	25.3	26.1	26.5
	6H	24.6	25.4	25.1	25.8	26.2	24.9	25.7	25.3	26.0	26.5
	8H	24.6	25.4	25.1	25.8	26.2	24.9	25.6	25.3	26.0	26.4
	12H	24.7	25.3	25.1	25.7	26.2	24.9	25.5	25.3	26.0	26.4
8H	4H	24.5	25.3	25.0	25.7	26.1	24.8	25.5	25.2	25.9	26.4
	6H	24.6	25.2	25.1	25.7	26.1	24.8	25.4	25.3	25.9	26.4
	8H	24.7	25.2	25.1	25.6	26.1	24.9	25.4	25.3	25.8	26.3
	12H	24.7	25.2	25.2	25.6	26.2	24.9	25.3	25.4	25.8	26.4
12H	4H	24.5	25.2	25.0	25.6	26.0	24.7	25.4	25.2	25.8	26.3
	6H	24.6	25.1	25.1	25.6	26.1	24.8	25.3	25.3	25.8	26.3
	8H	24.6	25.1	25.2	25.6	26.1	24.8	25.3	25.4	25.8	26.3
不同间隔布灯时,观察者位置引起的UGR变化:											
S = 1.0H	+ 0.9 / - 1.3					+ 0.7 / - 1.0					
1.5H	+ 0.6 / - 0.9					+ 0.5 / - 1.0					
2.0H	+ 2.4 / - 4.6					+ 2.3 / - 4.9					

依据CIE Pub.117计算, 16825lm光源光通,表格已经进行修正(8log(F/F0) = 9.8).
出光口面积: 0.1 m2

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:DAMIN
测试日期:2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.850米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz 实检光通:16824.5x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	61	50	44	60	50	44	59	49	43	37
0.80	72	61	55	71	61	54	69	60	54	48
1.00	81	71	65	80	70	64	77	71	64	57
1.25	88	79	73	86	78	72	84	77	71	65
1.50	93	84	78	91	83	78	88	81	76	69
2.00	99	92	86	97	90	85	93	88	84	76
2.50	102	95	90	100	94	89	96	91	87	79
3.00	105	99	94	103	97	93	98	94	91	82
4.00	108	103	99	106	101	98	101	98	95	86
5.00	110	106	102	107	104	100	103	100	97	88
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHR _{NOM} = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:DAMIN
测试日期:2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.850米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz 实检光通:16824.5x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

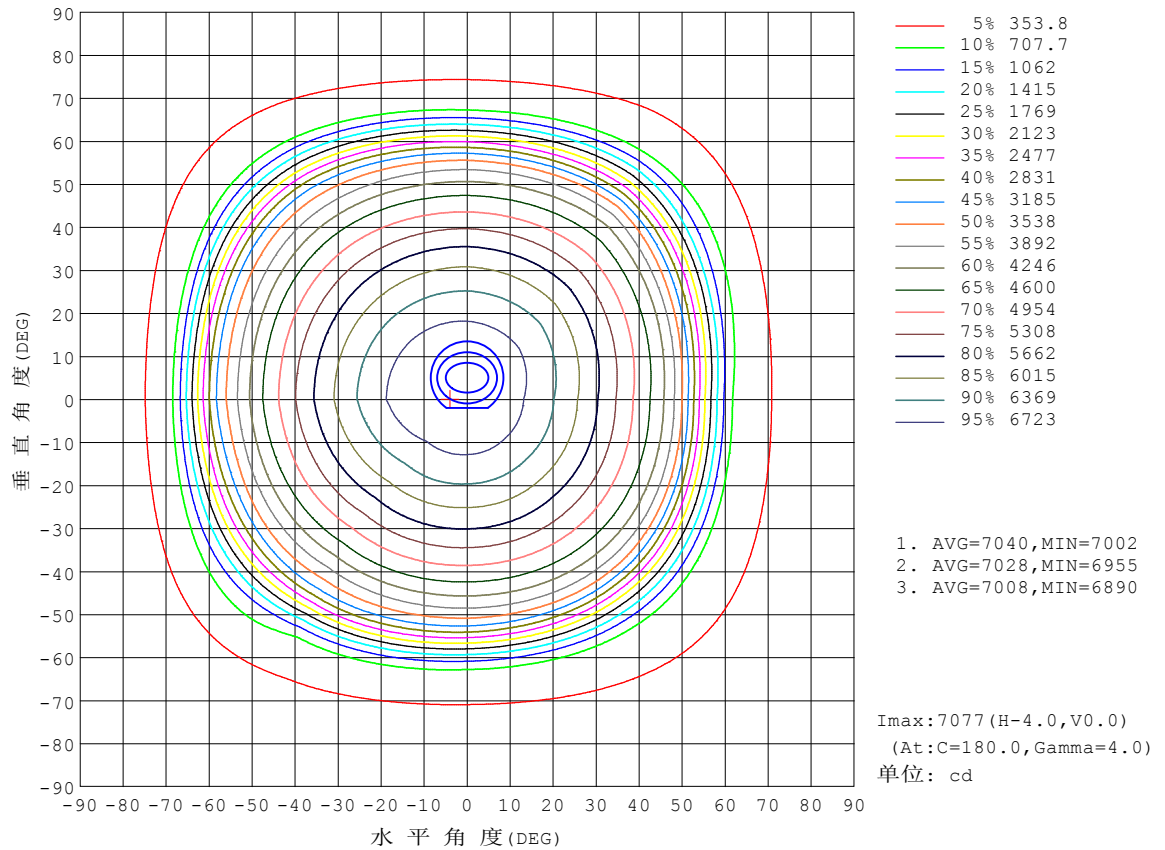


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz 实检光通:16824.5x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

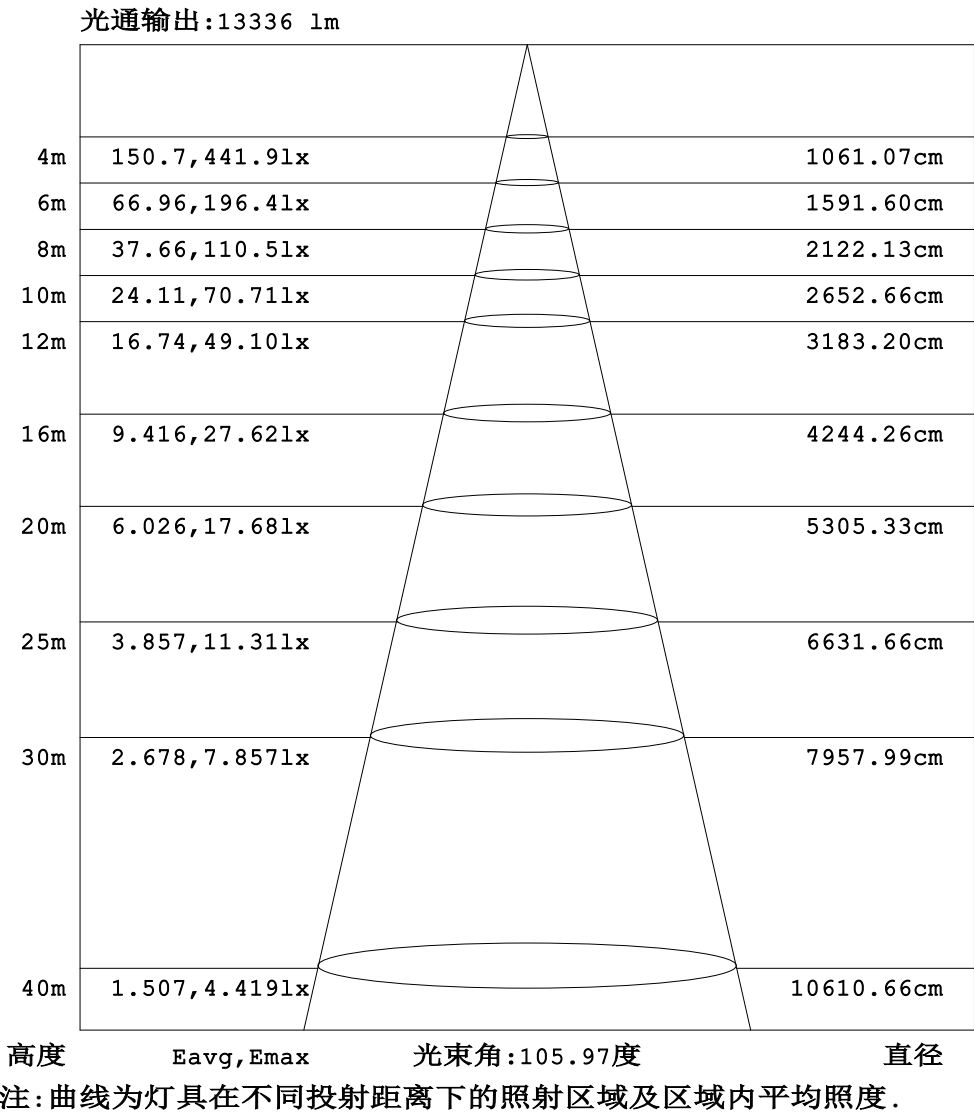


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:DAMIN
测试日期:2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.850米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz 实检光通:16824.5x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

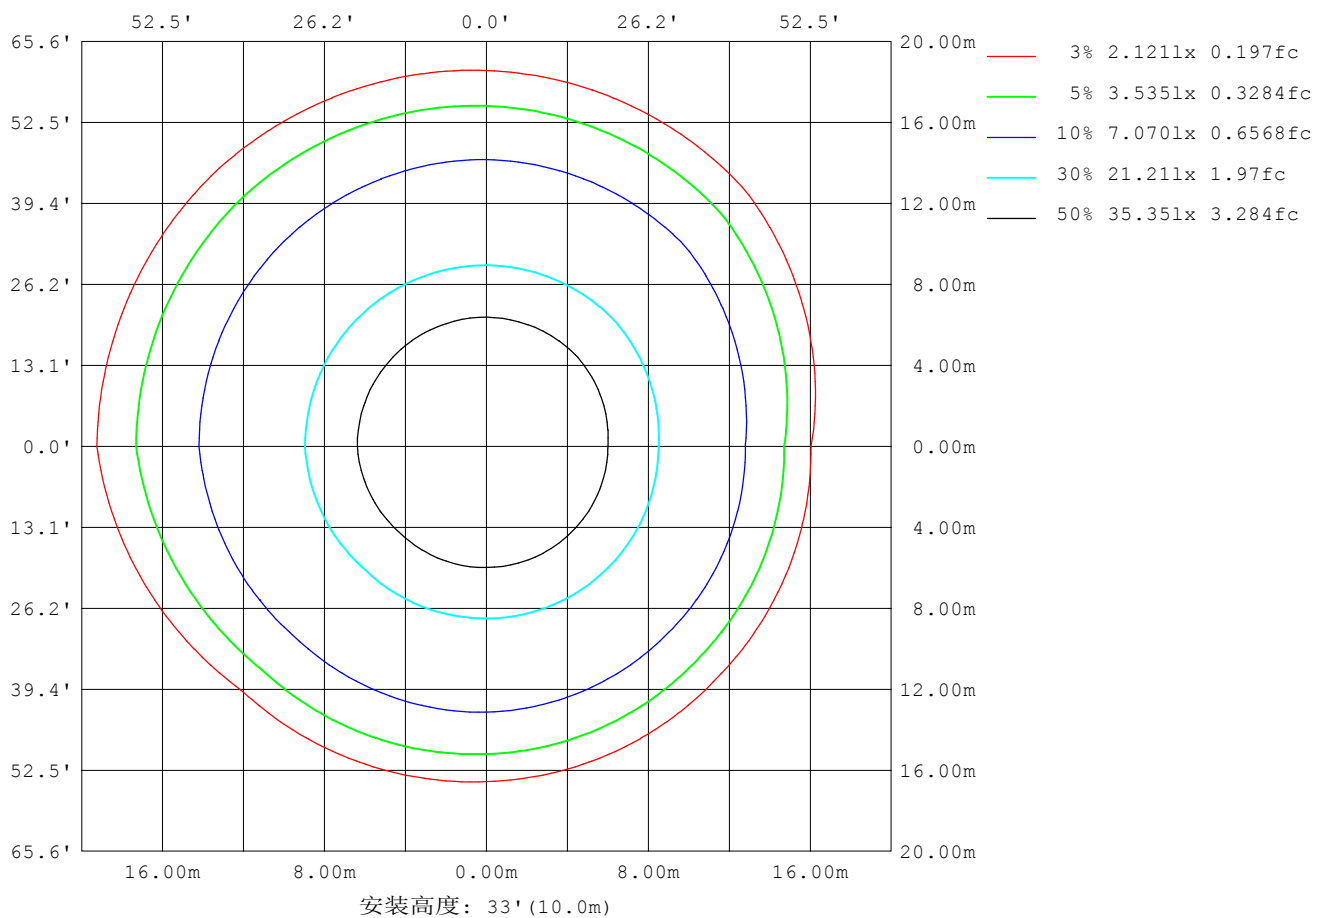

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz 实检光通:16824.5x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	23688
L横 (75) av	11448
L横 (85) av	9006
L纵 (65) av	20129
L纵 (75) av	10962
L纵 (85) av	9561
L45 (65) av	20168
L45 (75) av	11062
L45 (85) av	9318

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

平面照度曲线

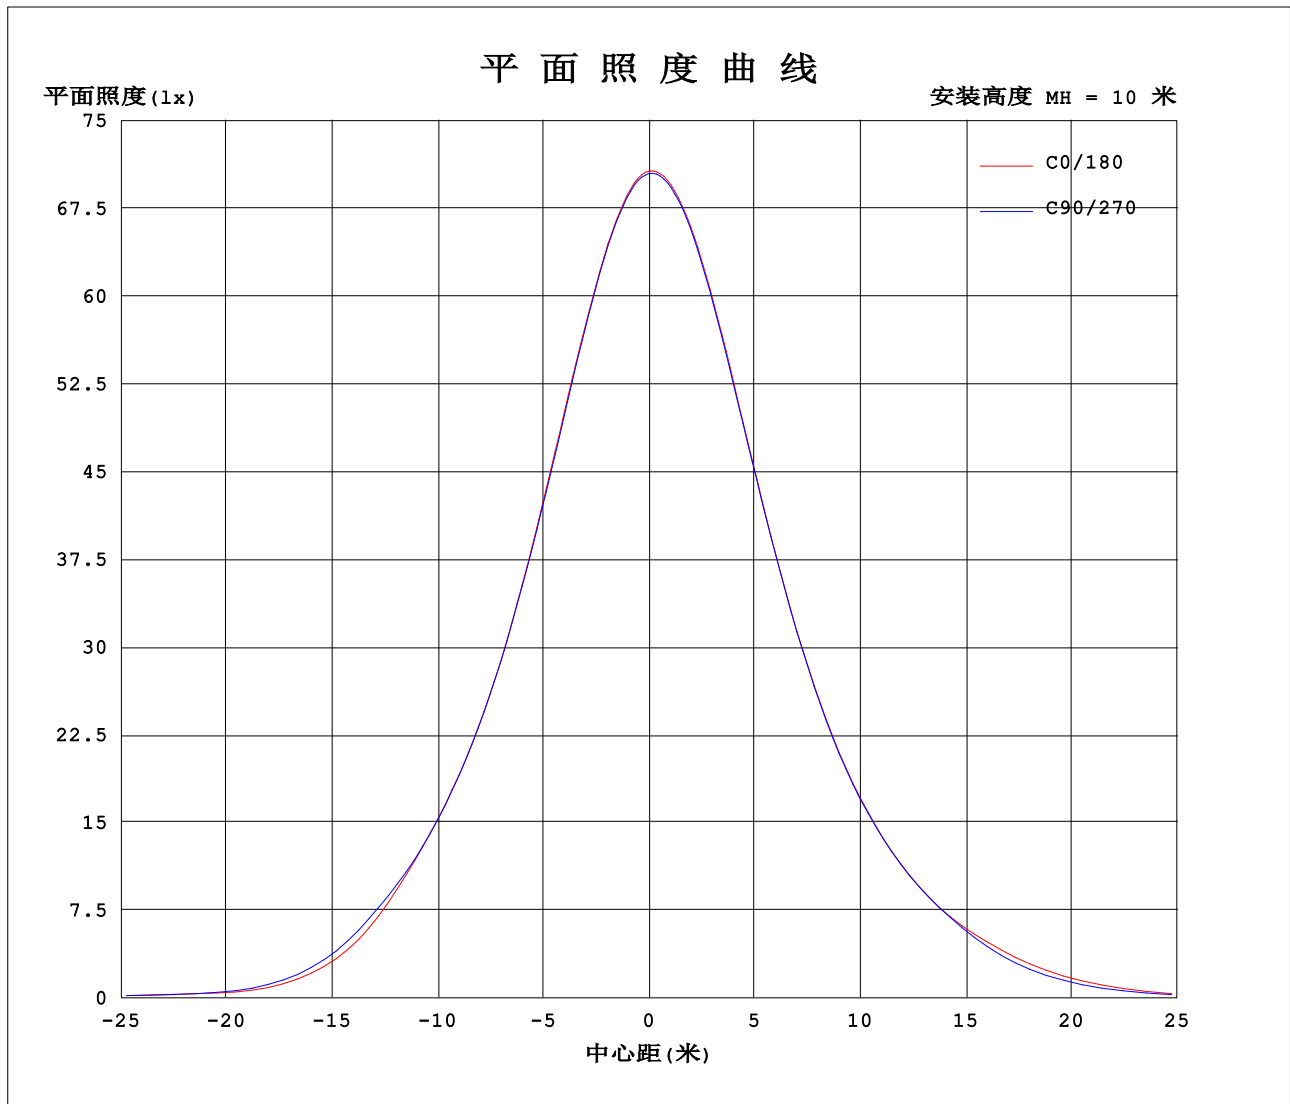

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz 实检光通:16824.5x1 lm								
灯具名称:				灯具类型:				灯具重量:
灯具规格:				外型尺寸:				测试编号:
制造厂商: EVERFINE				发光口面:				遮光角:

表--1									单位: cd									
C (DEG) γ (DEG)		0	45	90	135	180	225	270	315									
0	0	7070	7057	7051	7049	7070	7057	7051	7049									
5	5	6996	6989	6975	6983	7071	7065	7050	7037									
10	10	6846	6829	6835	6859	7007	7004	6983	6955									
15	15	6642	6614	6621	6662	6873	6869	6845	6802									
20	20	6379	6340	6348	6408	6672	6668	6640	6593									
25	25	6063	6018	6025	6089	6402	6398	6379	6328									
30	30	5694	5649	5671	5729	6081	6081	6072	6003									
35	35	5270	5248	5264	5323	5709	5713	5701	5627									
40	40	4829	4819	4830	4883	5298	5298	5277	5205									
45	45	4337	4309	4327	4379	4845	4845	4819	4755									
50	50	3530	3565	3684	3755	4316	4326	4319	4248									
55	55	2200	2282	2588	2893	3676	3704	3643	3415									
60	60	988	1044	1249	1551	2819	2749	2442	2085									
65	65	508	515	543	592	1494	1402	1158	900									
70	70	376	374	385	410	530	512	475	445									
75	75	244	234	233	249	349	348	334	314									
80	80	140	131	128	132	186	195	193	181									
85	85	85.5	84.0	83.8	83.7	71.5	79.3	82.9	77.9									
90	90	82.3	82.2	82.2	82.2	24.3	24.8	25.8	25.6									
95	95	81.5	81.5	81.4	81.2	24.6	24.6	24.8	25.0									
100	100	81.8	81.8	81.6	81.3	25.8	25.8	26.1	26.4									
105	105	82.6	82.7	82.5	82.2	27.7	27.7	28.0	28.5									
110	110	83.4	83.6	83.4	83.2	30.2	30.2	30.5	31.1									
115	115	84.6	84.8	84.5	84.3	33.0	33.1	33.5	34.0									
120	120	86.3	86.4	86.2	85.7	36.2	36.3	36.7	37.2									
125	125	88.0	88.1	87.9	87.4	39.7	39.7	40.1	40.6									
130	130	89.5	89.7	89.4	89.0	43.1	43.2	43.6	43.9									
135	135	91.4	91.4	91.0	90.6	46.4	46.4	46.6	46.9									
140	140	93.5	93.4	92.9	92.4	49.4	49.4	49.6	49.9									
145	145	95.8	95.8	95.3	94.8	52.6	52.6	53.1	53.6									
150	150	98.6	98.5	98.0	97.6	57.2	57.3	57.9	58.7									
155	155	101	101	100	100	63.2	63.4	64.1	64.9									
160	160	102	102	102	102	70.1	70.3	71.0	71.9									
165	165	102	102	102	102	77.6	77.6	78.4	79.3									
170	170	102	102	101	102	84.7	84.6	85.3	86.2									
175	175	99.6	99.7	99.8	100	90.9	90.8	91.5	92.2									
180	180	96.0	96.0	96.4	96.9	96.3	95.9	96.6	96.9									

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注: