


室内灯具光度数据

实测参数: U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz 实检光通:25217.6x1 lm					
灯具名称:		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面:		遮光角:	

光源数据		光度数据				光效: 167.02 lm/W
型号		峰值光强(cd)	10725	S/MH(C0/180)	1.26	
标称功率(W)	150	灯具效率(%)	100.0	S/MH(C90/270)	1.27	
额定电源电压(V)	220	总光通量(lm)	25218	η UP,DN(C0-180)	1.6,45.0	
额定光通量(lm)	25217.6	CIE分类	直接	η UP,DN(C180-360)	0.8,52.6	
灯具内光源数(只)	1	上射光通比(%)	2.4	CIBSE SHR NOM	1.25	
实测电源电压(V)	220	下射光通比(%)	97.6	CIBSE SHR MAX	1.35	

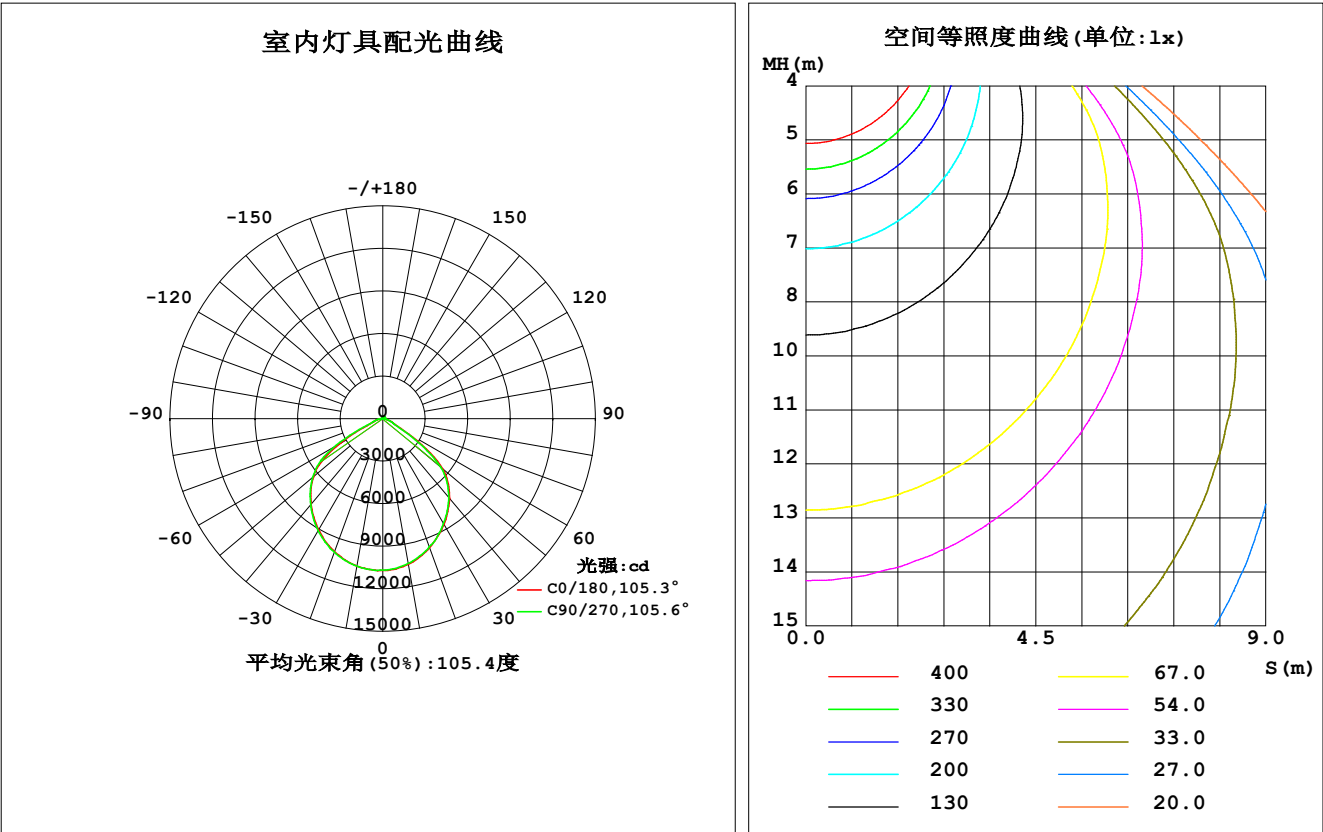

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	$\Phi_{\text{环}}$	$\Phi_{\text{总}}$	%lum, lamp
10	1043	1039	1037	1034	1056	1055	1054	1057	0- 10	1010	1010	4.01, 4.01
20	967.5	963.8	962.0	962.9	998.3	1000	1002	1002	10- 20	2876	3887	15.4, 15.4
30	862.5	857.0	856.7	858.3	905.1	907.7	911.8	909.6	20- 30	4317	8203	32.5, 32.5
40	733.5	728.0	723.5	726.6	786.7	789.4	791.5	789.1	30- 40	5155	13358	53, 53
50	552.5	539.2	533.6	538.7	638.7	643.6	645.4	639.5	40- 50	5260	18618	73.8, 73.8
60	180.5	168.8	163.9	168.7	340.5	369.2	383.2	371.9	50- 60	3946	22564	89.5, 89.5
70	62.76	61.64	61.82	63.20	75.60	79.37	81.19	80.21	60- 70	1405	23969	95, 95
80	20.82	20.58	20.72	21.14	28.71	30.30	30.74	30.15	70- 80	495.0	24464	97, 97
90	12.27	12.27	12.26	12.27	3.670	3.685	3.665	3.662	80- 90	149.1	24613	97.6, 97.6
100	12.16	12.18	12.20	12.19	3.913	3.892	3.879	3.881	90-100	86.79	24700	97.9, 97.9
110	12.44	12.46	12.48	12.47	4.583	4.543	4.529	4.530	100-110	87.32	24787	98.3, 98.3
120	12.84	12.86	12.90	12.89	5.488	5.439	5.423	5.444	110-120	87.46	24874	98.6, 98.6
130	13.33	13.36	13.38	13.39	6.508	6.462	6.454	6.474	120-130	85.54	24960	99, 99
140	13.89	13.92	13.95	13.95	7.438	7.401	7.393	7.418	130-140	79.63	25039	99.3, 99.3
150	14.68	14.70	14.71	14.70	8.693	8.635	8.604	8.637	140-150	69.78	25109	99.6, 99.6
160	15.30	15.27	15.27	15.27	10.65	10.58	10.53	10.55	150-160	56.79	25166	99.8, 99.8
170	15.24	15.19	15.20	15.19	12.82	12.72	12.69	12.70	160-170	38.06	25204	99.9, 99.9
180	14.44	14.39	14.36	14.37	14.47	14.38	14.37	14.37	170-180	13.53	25218	100, 100
单位: $^{\circ}$	光强: $\times 10\text{cd}$									单位: lm		

锥面光通量(90度): 16030 lm

%lum = 63.6%

%lamp = 63.6%

锥面光通量(120度): 22564 lm

%lum = 89.5%


%lamp = 89.5%

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数: U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz 实检光通:25217.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

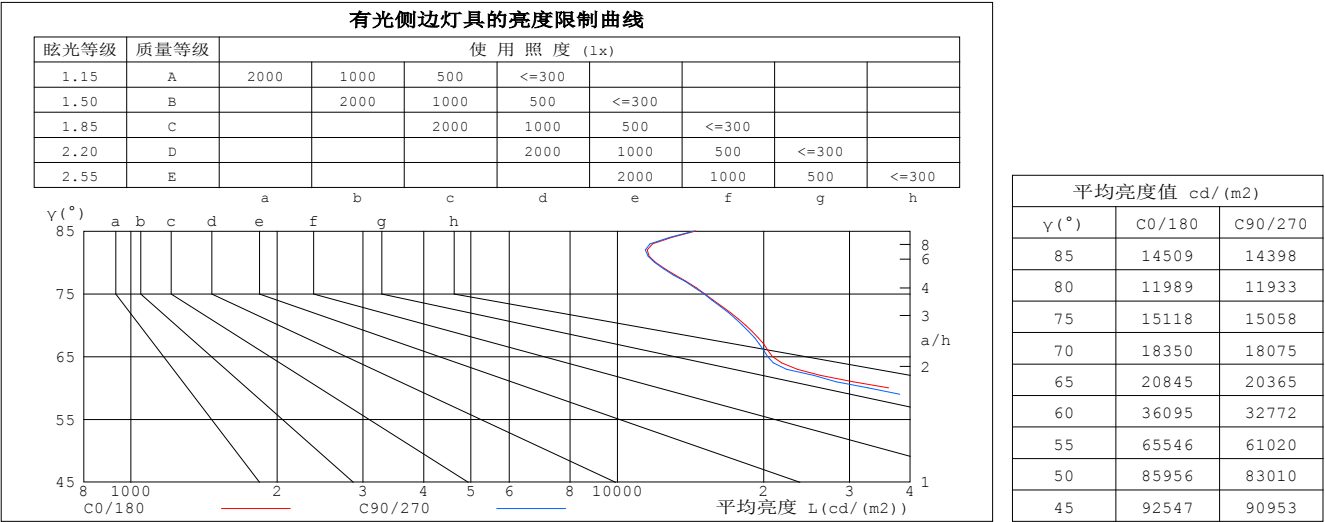


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:DAMIN
测试日期:2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.850米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz 实检光通:25217.6x1 lm														
灯具名称:					灯具类型:					灯具重量:				
灯具规格:					外型尺寸:					测试编号:				
制造厂商: EVERFINE					发光口面:					遮光角:				

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.06	1.03	.00	1.04	1.01	.98	.99	.97	.94	.95	.93	.91	.91	.89	.88	.86
2.0	.95	.89	.84	.93	.87	.83	.89	.84	.81	.85	.82	.78	.82	.79	.76	.74
3.0	.84	.77	.72	.83	.76	.71	.79	.74	.69	.77	.72	.68	.74	.70	.66	.64
4.0	.76	.68	.62	.74	.67	.61	.71	.65	.60	.69	.64	.59	.67	.62	.58	.56
5.0	.68	.60	.54	.67	.59	.53	.65	.58	.53	.62	.57	.52	.60	.55	.51	.49
6.0	.62	.53	.47	.61	.53	.47	.59	.52	.47	.57	.51	.46	.55	.50	.45	.43
7.0	.56	.48	.42	.55	.47	.42	.53	.47	.41	.52	.46	.41	.50	.45	.41	.39
8.0	.51	.43	.38	.50	.43	.38	.49	.42	.37	.48	.41	.37	.46	.41	.37	.35
9.0	.47	.39	.34	.46	.39	.34	.45	.38	.34	.44	.38	.33	.43	.37	.33	.31
10.0	.43	.36	.31	.43	.36	.31	.42	.35	.31	.41	.35	.30	.40	.34	.30	.28

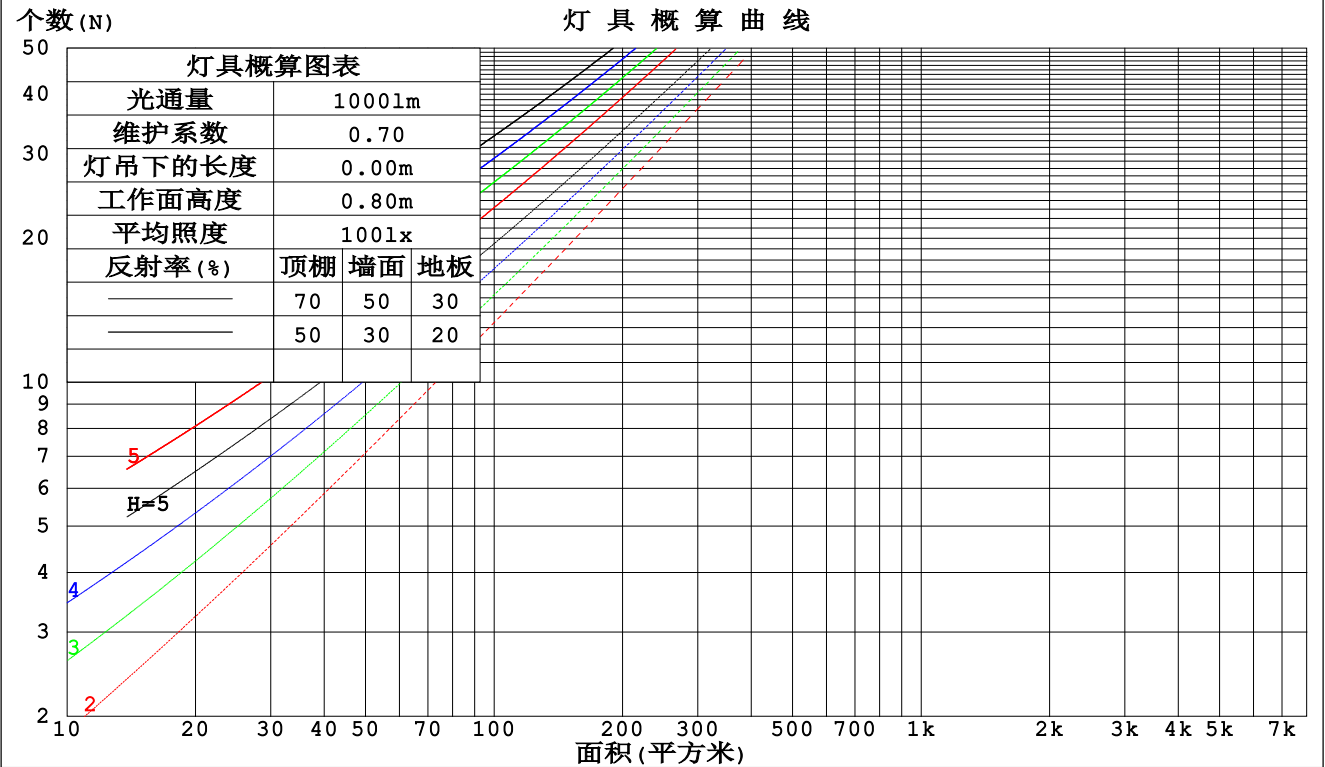

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz 实检光通:25217.6x1 lm					
灯具名称:		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面:		遮光角:	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.254	.144	.046	.246	.140	.045	.232	.133	.042	.218	.126	.040	.206	.120	.039	
2.0	.246	.135	.041	.240	.132	.041	.227	.126	.039	.216	.121	.038	.205	.116	.037	
3.0	.234	.125	.037	.228	.122	.037	.217	.118	.036	.207	.113	.035	.197	.109	.034	
4.0	.221	.115	.034	.215	.113	.033	.206	.109	.033	.196	.106	.032	.188	.102	.031	
5.0	.208	.106	.031	.203	.104	.030	.194	.101	.030	.186	.098	.029	.178	.095	.029	
6.0	.195	.098	.028	.191	.097	.028	.183	.094	.027	.176	.091	.027	.169	.089	.026	
7.0	.184	.091	.026	.180	.090	.026	.173	.087	.025	.166	.085	.025	.160	.083	.024	
8.0	.173	.085	.024	.170	.084	.024	.163	.082	.023	.157	.080	.023	.152	.078	.023	
9.0	.164	.079	.022	.161	.078	.022	.155	.077	.022	.149	.075	.021	.144	.073	.021	
10.0	.155	.074	.021	.152	.073	.020	.147	.072	.020	.142	.070	.020	.137	.069	.020	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.209	.209	.209	.178	.178	.178	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.195	.175	.157	.167	.150	.135	.114	.103	.094	.066	.060	.054	.021	.019	.018	
2.0	.185	.151	.122	.158	.130	.106	.108	.090	.074	.063	.052	.043	.020	.017	.014	
3.0	.176	.133	.098	.151	.114	.085	.104	.080	.060	.060	.046	.035	.019	.015	.012	
4.0	.169	.119	.081	.145	.103	.071	.099	.072	.050	.058	.042	.029	.019	.014	.010	
5.0	.162	.108	.069	.139	.094	.060	.096	.066	.043	.055	.038	.025	.018	.013	.008	
6.0	.155	.100	.061	.133	.087	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
7.0	.149	.093	.054	.128	.081	.047	.088	.057	.033	.051	.033	.020	.017	.011	.007	
8.0	.143	.087	.049	.123	.076	.043	.085	.053	.030	.049	.031	.018	.016	.010	.006	
9.0	.137	.082	.045	.118	.072	.040	.082	.050	.028	.048	.030	.017	.015	.010	.006	
10.0	.132	.078	.042	.114	.068	.037	.079	.048	.026	.046	.028	.016	.015	.009	.005	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

UGR(Unified Glare Rating) 数据表

实测参数: U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz 实检光通:25217.6x1 lm										
灯具名称:			灯具类型:			灯具重量:				
灯具规格:			外型尺寸:			测试编号:				
制造厂商: EVERFINE			发光口面:			遮光角:				
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	26.3	27.6	26.6	27.8	28.1	26.1	27.4	26.4	27.7	27.9
3H	26.3	27.5	26.6	27.8	28.1	26.1	27.4	26.5	27.6	27.9
4H	26.3	27.5	26.7	27.8	28.1	26.2	27.3	26.5	27.6	27.9
6H	26.3	27.4	26.6	27.7	28.0	26.1	27.2	26.5	27.5	27.8
8H	26.3	27.3	26.6	27.6	28.0	26.1	27.2	26.5	27.5	27.8
12H	26.2	27.2	26.6	27.6	27.9	26.1	27.1	26.5	27.4	27.8
4H 2H	26.2	27.4	26.6	27.7	28.0	26.1	27.2	26.4	27.5	27.8
3H	26.3	27.3	26.7	27.7	28.0	26.2	27.2	26.6	27.5	27.9
4H	26.4	27.3	26.8	27.7	28.0	26.3	27.2	26.7	27.5	27.9
6H	26.4	27.2	26.9	27.6	28.0	26.3	27.1	26.7	27.5	27.9
8H	26.4	27.2	26.9	27.6	28.0	26.3	27.0	26.7	27.4	27.9
12H	26.4	27.1	26.9	27.5	28.0	26.3	27.0	26.8	27.4	27.8
8H 4H	26.3	27.1	26.8	27.5	27.9	26.2	26.9	26.7	27.3	27.8
6H	26.4	27.0	26.9	27.5	27.9	26.3	26.9	26.8	27.3	27.8
8H	26.4	27.0	26.9	27.4	27.9	26.3	26.8	26.8	27.3	27.8
12H	26.5	26.9	27.0	27.4	27.9	26.4	26.8	26.9	27.3	27.8
12H 4H	26.3	27.0	26.8	27.4	27.9	26.2	26.8	26.6	27.3	27.7
6H	26.4	26.9	26.9	27.4	27.9	26.3	26.8	26.8	27.3	27.7
8H	26.4	26.9	26.9	27.4	27.9	26.3	26.7	26.8	27.2	27.8
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 0.7 / - 1.0					+ 0.8 / - 1.1				
1.5H	+ 0.5 / - 1.0					+ 0.5 / - 0.9				
2.0H	+ 2.2 / - 4.3					+ 2.2 / - 4.2				

依据CIE Pub.117计算, 25218lm光源光通,表格已经进行修正($81\log(F/F_0) = 11.2$)。
出光口面积: 0.1 m²

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz 实检光通:25217.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	61	51	44	61	50	44	59	50	44	38
0.80	72	62	55	71	61	55	69	60	54	48
1.00	81	71	65	80	71	65	78	71	64	57
1.25	88	79	73	87	78	72	84	77	71	65
1.50	93	84	78	91	83	78	88	81	77	70
2.00	99	92	86	97	90	85	93	88	84	76
2.50	102	96	90	100	94	89	96	91	87	79
3.00	105	99	95	103	97	93	98	94	91	82
4.00	108	103	99	106	101	98	101	98	95	86
5.00	110	106	102	107	104	101	103	100	97	88
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHR _{NOM} = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:DAMIN
测试日期:2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.850米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz 实检光通:25217.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

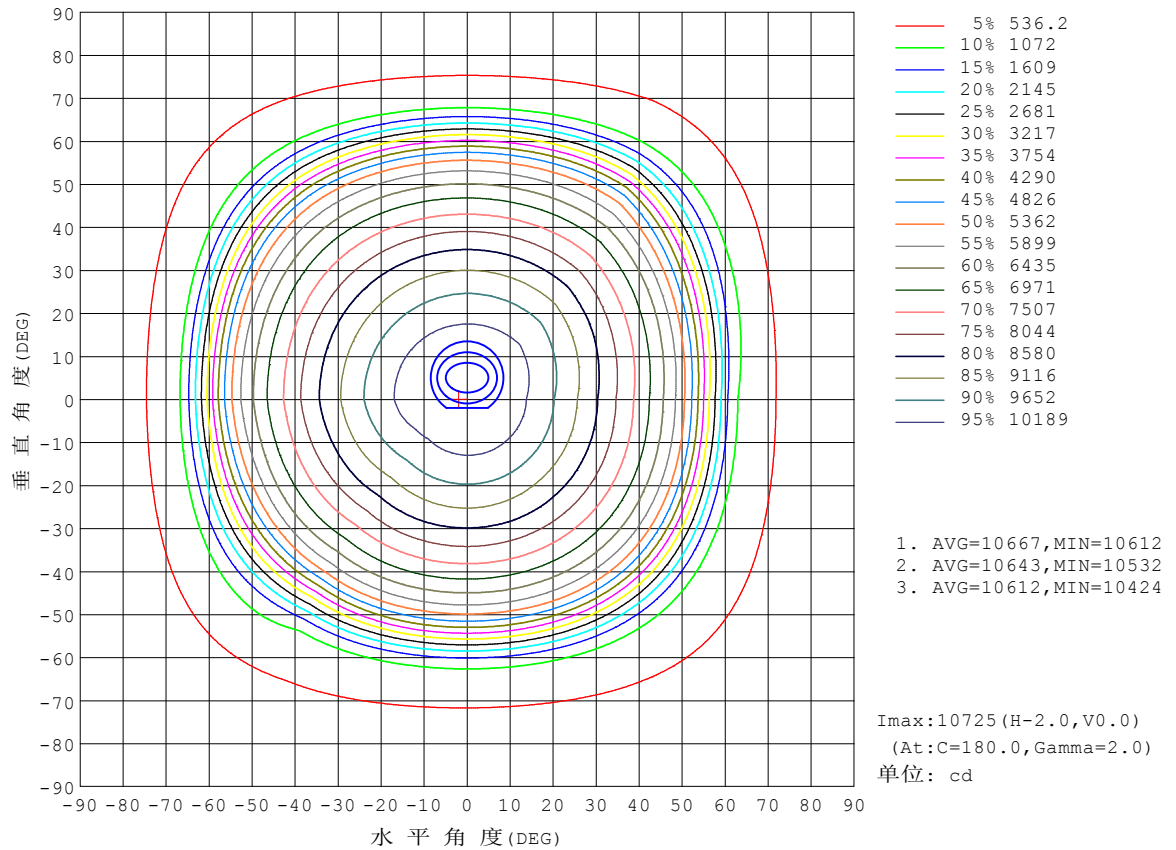


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz 实检光通:25217.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

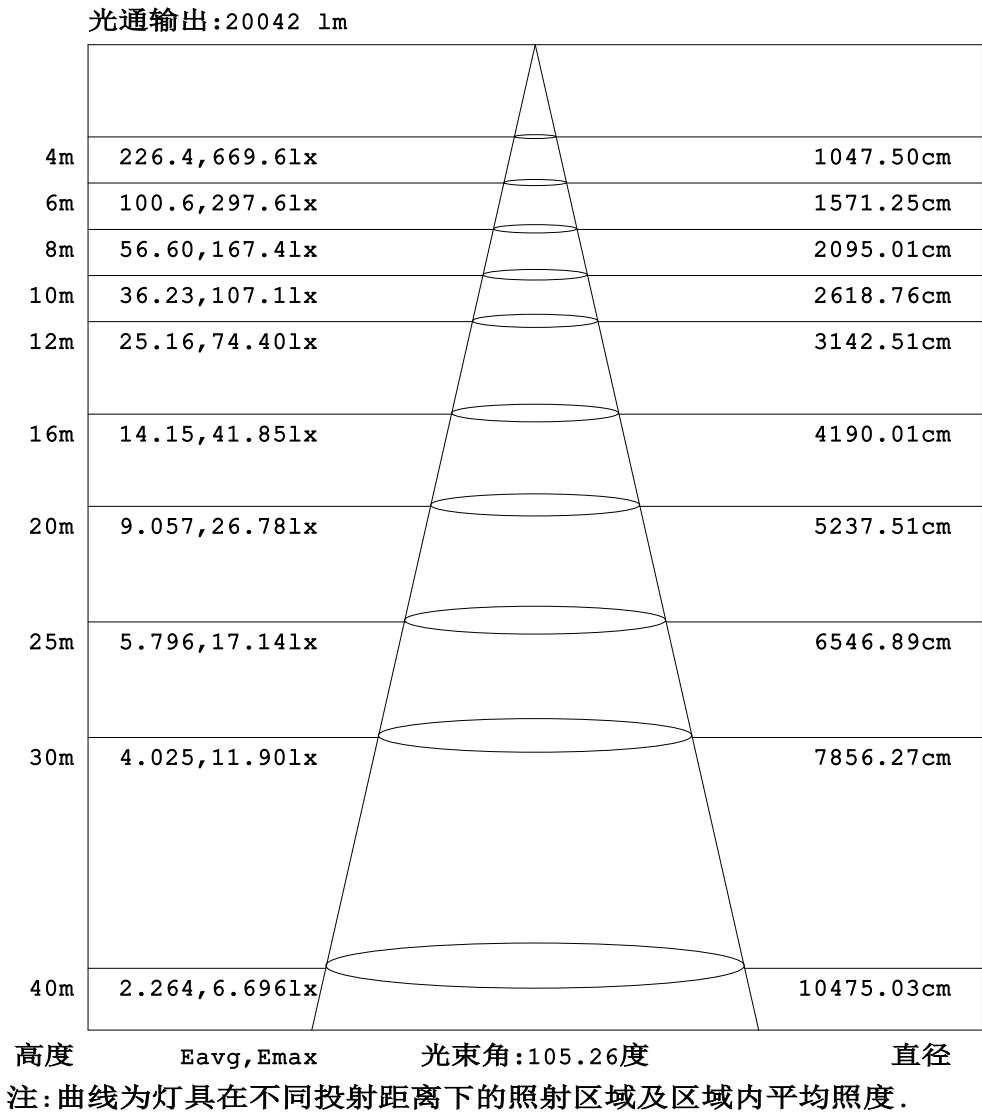


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:DAMIN
测试日期:2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.850米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz 实检光通:25217.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

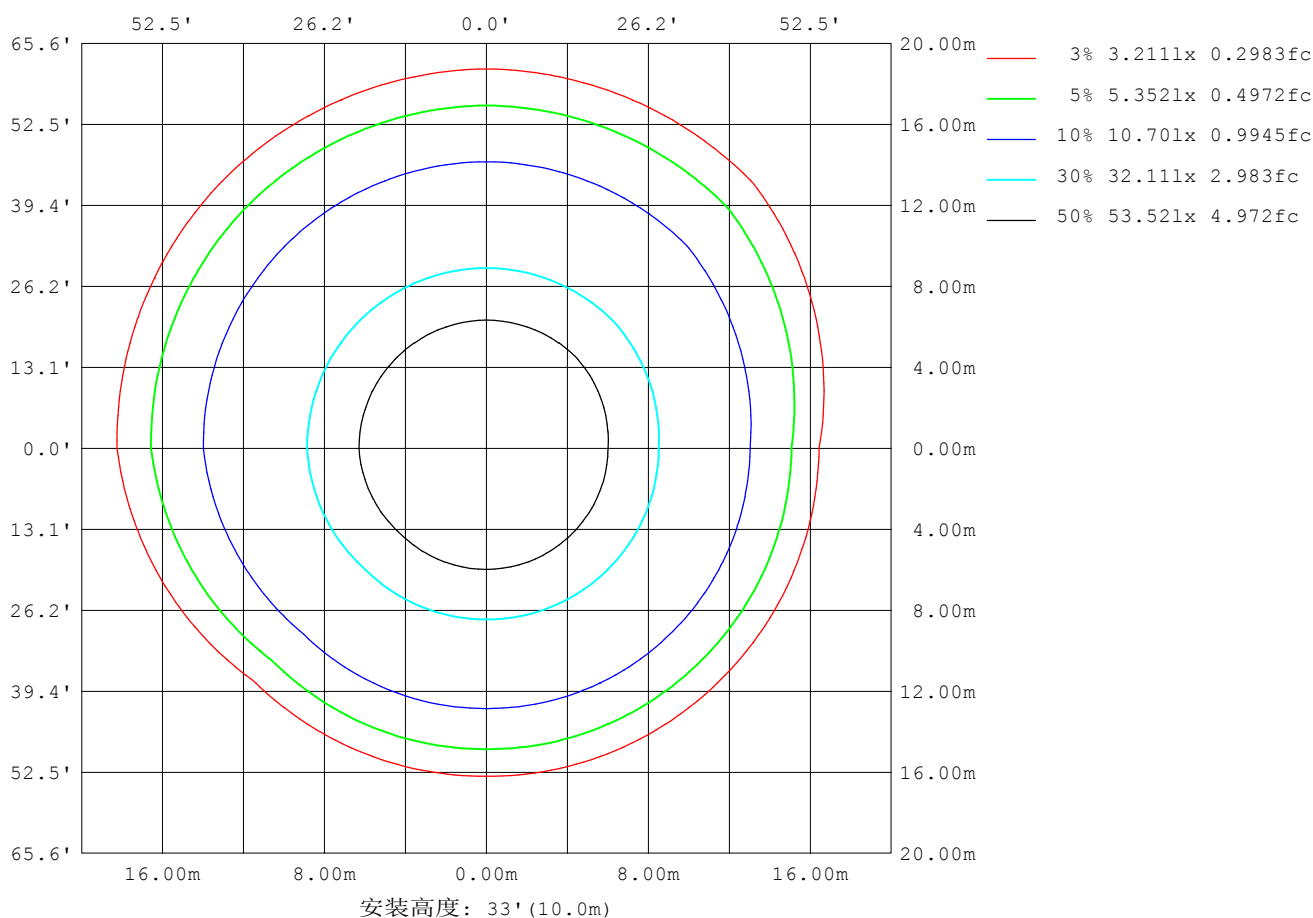

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz 实检光通:25217.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	28310
L横 (75) av	17511
L横 (85) av	13411
L纵 (65) av	32181
L纵 (75) av	18189
L纵 (85) av	13974
L45 (65) av	31014
L45 (75) av	18072
L45 (85) av	13932

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:DAMIN
测试日期:2026-07-18

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.850米 [K=1.0000]
备注:

平面照度曲线

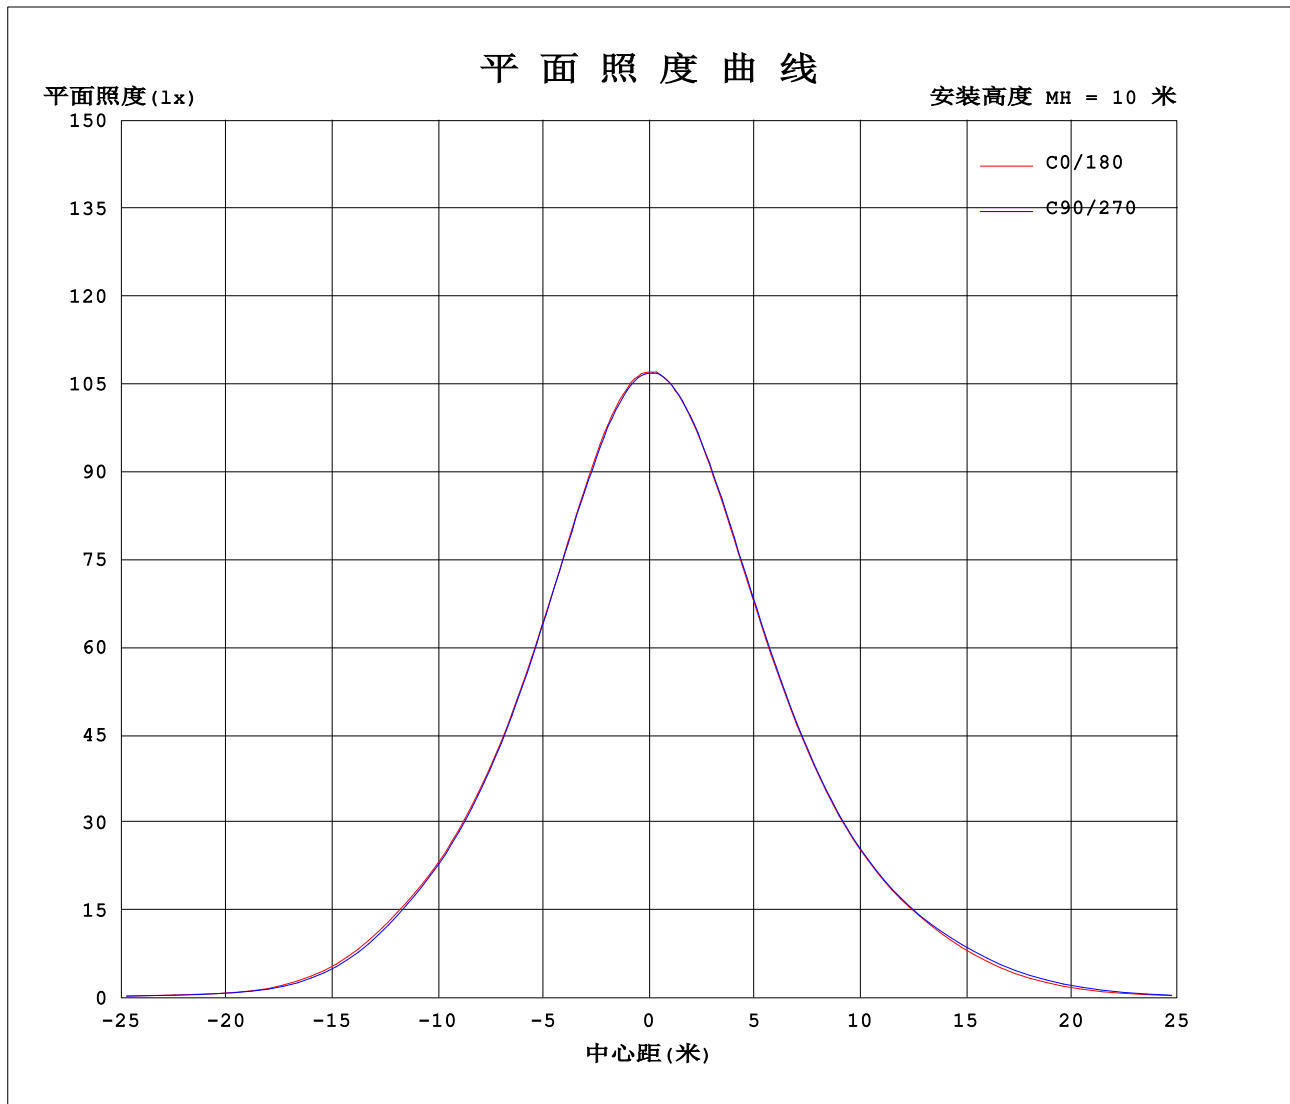

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2026-07-18

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.850米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz 实检光通:25217.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

表--1

单位: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1070	1071	1068	1068	1070	1071	1068	1068										
5	1064	1060	1060	1057	1068	1067	1068	1067										
10	1043	1039	1037	1034	1056	1055	1054	1057										
15	1010	1009	1003	1002	1032	1033	1035	1035										
20	967	964	962	963	998	1000	1002	1002										
25	918	912	915	913	956	958	962	961										
30	863	857	857	858	905	908	912	910										
35	800	795	793	795	849	852	856	852										
40	733	728	724	727	787	789	792	789										
45	654	647	643	646	719	723	724	721										
50	553	539	534	539	639	644	645	640										
55	376	356	350	354	528	545	551	542										
60	180	169	164	169	340	369	383	372										
65	88.1	86.1	86.1	87.5	151	174	186	177										
70	62.8	61.6	61.8	63.2	75.6	79.4	81.2	80.2										
75	39.1	38.6	39.0	40.0	51.5	54.1	55.2	54.4										
80	20.8	20.6	20.7	21.1	28.7	30.3	30.7	30.2										
85	12.6	12.6	12.5	12.6	10.7	11.9	11.8	11.6										
90	12.3	12.3	12.3	12.3	3.67	3.69	3.67	3.66										
95	12.1	12.2	12.2	12.1	3.73	3.72	3.71	3.70										
100	12.2	12.2	12.2	12.2	3.91	3.89	3.88	3.88										
105	12.3	12.3	12.3	12.3	4.21	4.18	4.16	4.16										
110	12.4	12.5	12.5	12.5	4.58	4.54	4.53	4.53										
115	12.6	12.6	12.7	12.6	5.01	4.97	4.95	4.97										
120	12.8	12.9	12.9	12.9	5.49	5.44	5.42	5.44										
125	13.1	13.1	13.2	13.2	5.99	5.94	5.94	5.96										
130	13.3	13.4	13.4	13.4	6.51	6.46	6.45	6.47										
135	13.6	13.6	13.6	13.6	6.98	6.95	6.94	6.96										
140	13.9	13.9	14.0	13.9	7.44	7.40	7.39	7.42										
145	14.3	14.3	14.3	14.3	7.96	7.92	7.91	7.94										
150	14.7	14.7	14.7	14.7	8.69	8.63	8.60	8.64										
155	15.1	15.1	15.1	15.1	9.61	9.54	9.50	9.53										
160	15.3	15.3	15.3	15.3	10.7	10.6	10.5	10.6										
165	15.3	15.3	15.3	15.3	11.8	11.7	11.6	11.7										
170	15.2	15.2	15.2	15.2	12.8	12.7	12.7	12.7										
175	15.0	14.9	14.9	14.9	13.7	13.6	13.6	13.6										
180	14.4	14.4	14.4	14.4	14.5	14.4	14.4	14.4										

C角度范围: 0度 - 360度

C角度间隔: 45.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: DAMIN

测试日期: 2026-07-18

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411

环境湿度: 65.0%

测试距离: 7.850米 [K=1.0000]

备注: