


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz Lamp Flux:25217.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 167.02 lm/W			
MODEL		Imax(cd)	10725	S/MH(C0/180)	1.26
NOMINAL POWER(W)	150	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	25218	η UP,DN(C0-180)	1.6,45.0
NOMINAL FLUX(lm)	25217.6	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.8,52.6
LAMPS INSIDE	1	η up(%)	2.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

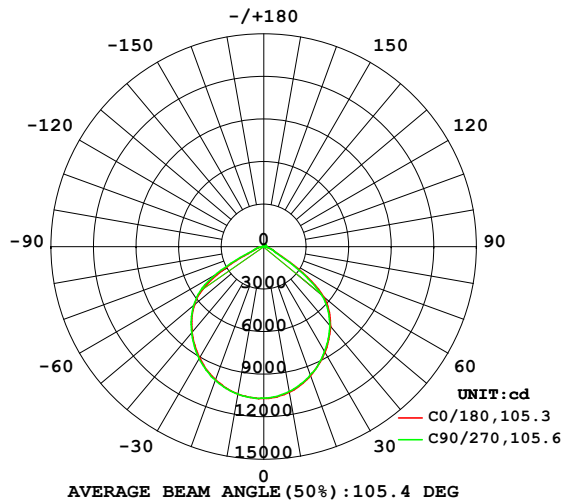

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

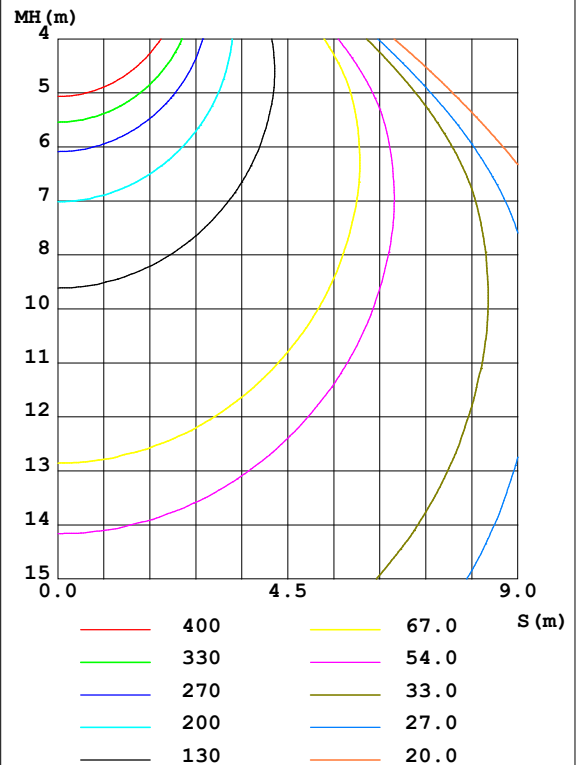

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1043	1039	1037	1034	1056	1055	1054	1057	0- 10	1010	1010	4.01,4.01
20	967.5	963.8	962.0	962.9	998.3	1000	1002	1002	10- 20	2876	3887	15.4,15.4
30	862.5	857.0	856.7	858.3	905.1	907.7	911.8	909.6	20- 30	4317	8203	32.5,32.5
40	733.5	728.0	723.5	726.6	786.7	789.4	791.5	789.1	30- 40	5155	13358	53,53
50	552.5	539.2	533.6	538.7	638.7	643.6	645.4	639.5	40- 50	5260	18618	73.8,73.8
60	180.5	168.8	163.9	168.7	340.5	369.2	383.2	371.9	50- 60	3946	22564	89.5,89.5
70	62.76	61.64	61.82	63.20	75.60	79.37	81.19	80.21	60- 70	1405	23969	95,95
80	20.82	20.58	20.72	21.14	28.71	30.30	30.74	30.15	70- 80	495.0	24464	97,97
90	12.27	12.27	12.26	12.27	3.670	3.685	3.665	3.662	80- 90	149.1	24613	97.6,97.6
100	12.16	12.18	12.20	12.19	3.913	3.892	3.879	3.881	90-100	86.79	24700	97.9,97.9
110	12.44	12.46	12.48	12.47	4.583	4.543	4.529	4.530	100-110	87.32	24787	98.3,98.3
120	12.84	12.86	12.90	12.89	5.488	5.439	5.423	5.444	110-120	87.46	24874	98.6,98.6
130	13.33	13.36	13.38	13.39	6.508	6.462	6.454	6.474	120-130	85.54	24960	99,99
140	13.89	13.92	13.95	13.95	7.438	7.401	7.393	7.418	130-140	79.63	25039	99.3,99.3
150	14.68	14.70	14.71	14.70	8.693	8.635	8.604	8.637	140-150	69.78	25109	99.6,99.6
160	15.30	15.27	15.27	15.27	10.65	10.58	10.53	10.55	150-160	56.79	25166	99.8,99.8
170	15.24	15.19	15.20	15.19	12.82	12.72	12.69	12.70	160-170	38.06	25204	99.9,99.9
180	14.44	14.39	14.36	14.37	14.47	14.38	14.37	14.37	170-180	13.53	25218	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 16030 lm

%lum = 63.6%

%lamp = 63.6%

Conical surface Flux(120deg): 22564 lm

%lum = 89.5%


%lamp = 89.5%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.850m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz Lamp Flux:25217.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

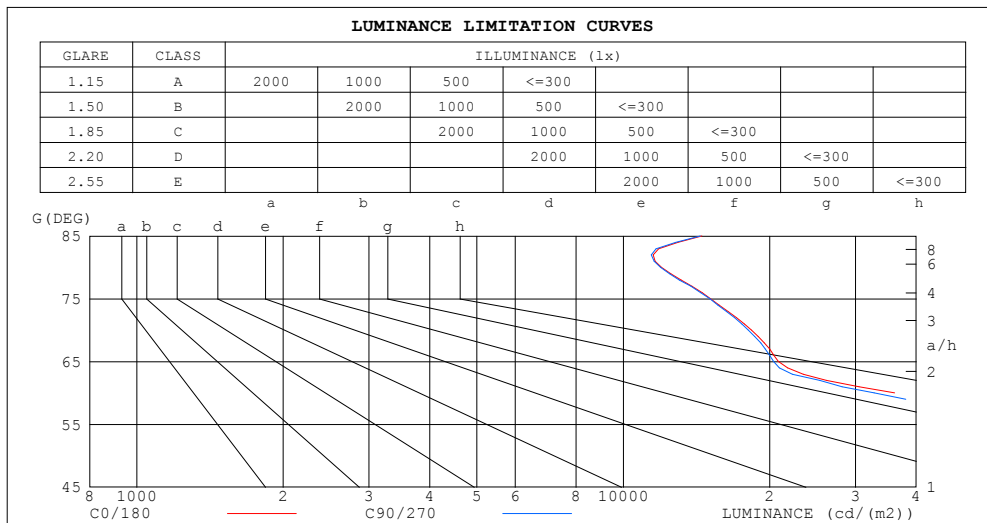

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	14509	14398
80	11989	11933
75	15118	15058
70	18350	18075
65	20845	20365
60	36095	32772
55	65546	61020
50	85956	83010
45	92547	90953


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz Lamp Flux:25217.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.06	1.03	.00	1.04	1.01	.98	.99	.97	.94	.95	.93	.91	.91	.89	.88	.86
2.0	.95	.89	.84	.93	.87	.83	.89	.84	.81	.85	.82	.78	.82	.79	.76	.74
3.0	.84	.77	.72	.83	.76	.71	.79	.74	.69	.77	.72	.68	.74	.70	.66	.64
4.0	.76	.68	.62	.74	.67	.61	.71	.65	.60	.69	.64	.59	.67	.62	.58	.56
5.0	.68	.60	.54	.67	.59	.53	.65	.58	.53	.62	.57	.52	.60	.55	.51	.49
6.0	.62	.53	.47	.61	.53	.47	.59	.52	.47	.57	.51	.46	.55	.50	.45	.43
7.0	.56	.48	.42	.55	.47	.42	.53	.47	.41	.52	.46	.41	.50	.45	.41	.39
8.0	.51	.43	.38	.50	.43	.38	.49	.42	.37	.48	.41	.37	.46	.41	.37	.35
9.0	.47	.39	.34	.46	.39	.34	.45	.38	.34	.44	.38	.33	.43	.37	.33	.31
10.0	.43	.36	.31	.43	.36	.31	.42	.35	.31	.41	.35	.30	.40	.34	.30	.28

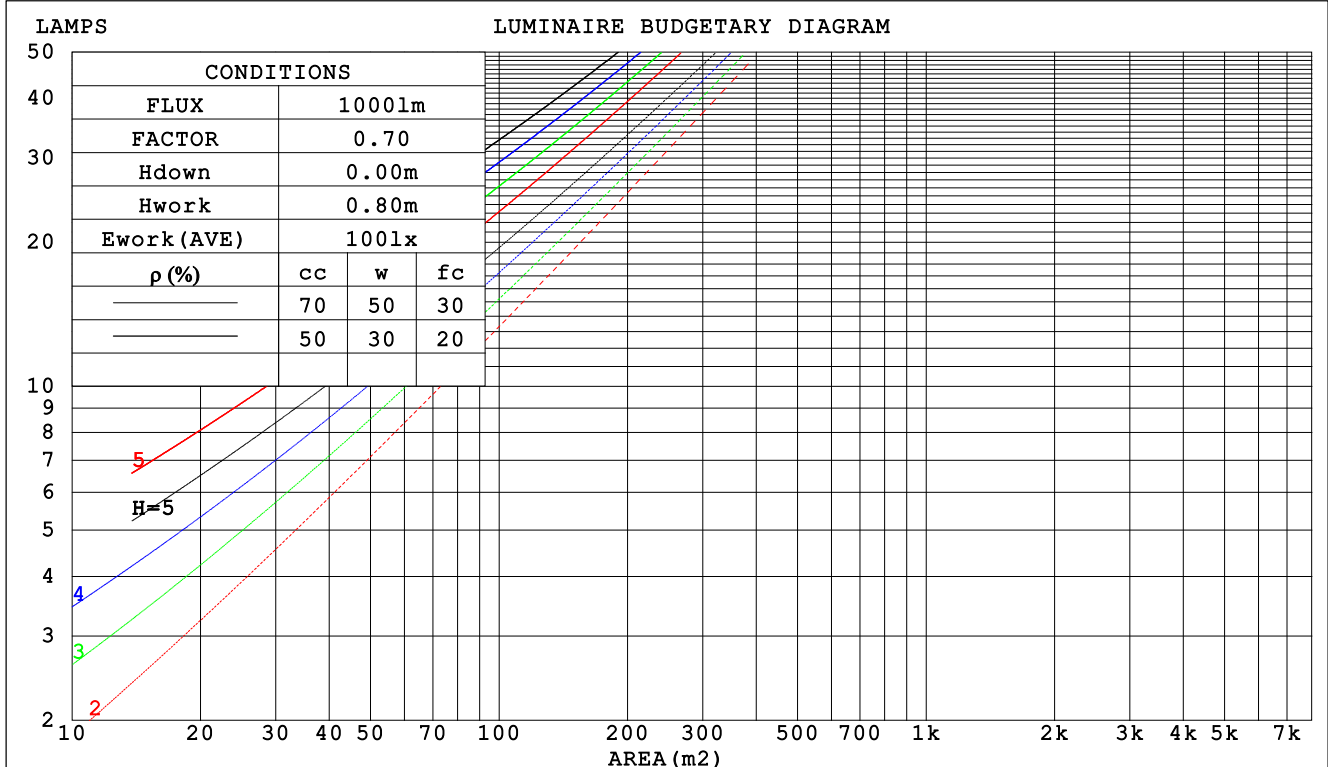

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz Lamp Flux:25217.6x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.: EVERFINE		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.254	.144	.046	.246	.140	.045	.232	.133	.042	.218	.126	.040	.206	.120	.039		
2.0	.246	.135	.041	.240	.132	.041	.227	.126	.039	.216	.121	.038	.205	.116	.037		
3.0	.234	.125	.037	.228	.122	.037	.217	.118	.036	.207	.113	.035	.197	.109	.034		
4.0	.221	.115	.034	.215	.113	.033	.206	.109	.033	.196	.106	.032	.188	.102	.031		
5.0	.208	.106	.031	.203	.104	.030	.194	.101	.030	.186	.098	.029	.178	.095	.029		
6.0	.195	.098	.028	.191	.097	.028	.183	.094	.027	.176	.091	.027	.169	.089	.026		
7.0	.184	.091	.026	.180	.090	.026	.173	.087	.025	.166	.085	.025	.160	.083	.024		
8.0	.173	.085	.024	.170	.084	.024	.163	.082	.023	.157	.080	.023	.152	.078	.023		
9.0	.164	.079	.022	.161	.078	.022	.155	.077	.022	.149	.075	.021	.144	.073	.021		
10.0	.155	.074	.021	.152	.073	.020	.147	.072	.020	.142	.070	.020	.137	.069	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.178	.178	.178	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.195	.175	.157	.167	.150	.135	.114	.103	.094	.066	.060	.054	.021	.019	.018	
2.0	.185	.151	.122	.158	.130	.106	.108	.090	.074	.063	.052	.043	.020	.017	.014	
3.0	.176	.133	.098	.151	.114	.085	.104	.080	.060	.060	.046	.035	.019	.015	.012	
4.0	.169	.119	.081	.145	.103	.071	.099	.072	.050	.058	.042	.029	.019	.014	.010	
5.0	.162	.108	.069	.139	.094	.060	.096	.066	.043	.055	.038	.025	.018	.013	.008	
6.0	.155	.100	.061	.133	.087	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
7.0	.149	.093	.054	.128	.081	.047	.088	.057	.033	.051	.033	.020	.017	.011	.007	
8.0	.143	.087	.049	.123	.076	.043	.085	.053	.030	.049	.031	.018	.016	.010	.006	
9.0	.137	.082	.045	.118	.072	.040	.082	.050	.028	.048	.030	.017	.015	.010	.006	
10.0	.132	.078	.042	.114	.068	.037	.079	.048	.026	.046	.028	.016	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz Lamp Flux:25217.6x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.3	27.6	26.6	27.8	28.1	26.1	27.4	26.4	27.7	27.9
3H	26.3	27.5	26.6	27.8	28.1	26.1	27.4	26.5	27.6	27.9
4H	26.3	27.5	26.7	27.8	28.1	26.2	27.3	26.5	27.6	27.9
6H	26.3	27.4	26.6	27.7	28.0	26.1	27.2	26.5	27.5	27.8
8H	26.3	27.3	26.6	27.6	28.0	26.1	27.2	26.5	27.5	27.8
12H	26.2	27.2	26.6	27.6	27.9	26.1	27.1	26.5	27.4	27.8
4H 2H	26.2	27.4	26.6	27.7	28.0	26.1	27.2	26.4	27.5	27.8
3H	26.3	27.3	26.7	27.7	28.0	26.2	27.2	26.6	27.5	27.9
4H	26.4	27.3	26.8	27.7	28.0	26.3	27.2	26.7	27.5	27.9
6H	26.4	27.2	26.9	27.6	28.0	26.3	27.1	26.7	27.5	27.9
8H	26.4	27.2	26.9	27.6	28.0	26.3	27.0	26.7	27.4	27.9
12H	26.4	27.1	26.9	27.5	28.0	26.3	27.0	26.8	27.4	27.8
8H 4H	26.3	27.1	26.8	27.5	27.9	26.2	26.9	26.7	27.3	27.8
6H	26.4	27.0	26.9	27.5	27.9	26.3	26.9	26.8	27.3	27.8
8H	26.4	27.0	26.9	27.4	27.9	26.3	26.8	26.8	27.3	27.8
12H	26.5	26.9	27.0	27.4	27.9	26.4	26.8	26.9	27.3	27.8
12H 4H	26.3	27.0	26.8	27.4	27.9	26.2	26.8	26.6	27.3	27.7
6H	26.4	26.9	26.9	27.4	27.9	26.3	26.8	26.8	27.3	27.7
8H	26.4	26.9	26.9	27.4	27.9	26.3	26.7	26.8	27.2	27.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 1.0					+ 0.8 / - 1.1				
1.5H	+ 0.5 / - 1.0					+ 0.5 / - 0.9				
2.0H	+ 2.2 / - 4.3					+ 2.2 / - 4.2				

CIE Pub.117, 25218 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 11.2)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz Lamp Flux:25217.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	61	51	44	61	50	44	59	50	44	38
0.80	72	62	55	71	61	55	69	60	54	48
1.00	81	71	65	80	71	65	78	71	64	57
1.25	88	79	73	87	78	72	84	77	71	65
1.50	93	84	78	91	83	78	88	81	77	70
2.00	99	92	86	97	90	85	93	88	84	76
2.50	102	96	90	100	94	89	96	91	87	79
3.00	105	99	95	103	97	93	98	94	91	82
4.00	108	103	99	106	101	98	101	98	95	86
5.00	110	106	102	107	104	101	103	100	97	88
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz Lamp Flux:25217.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

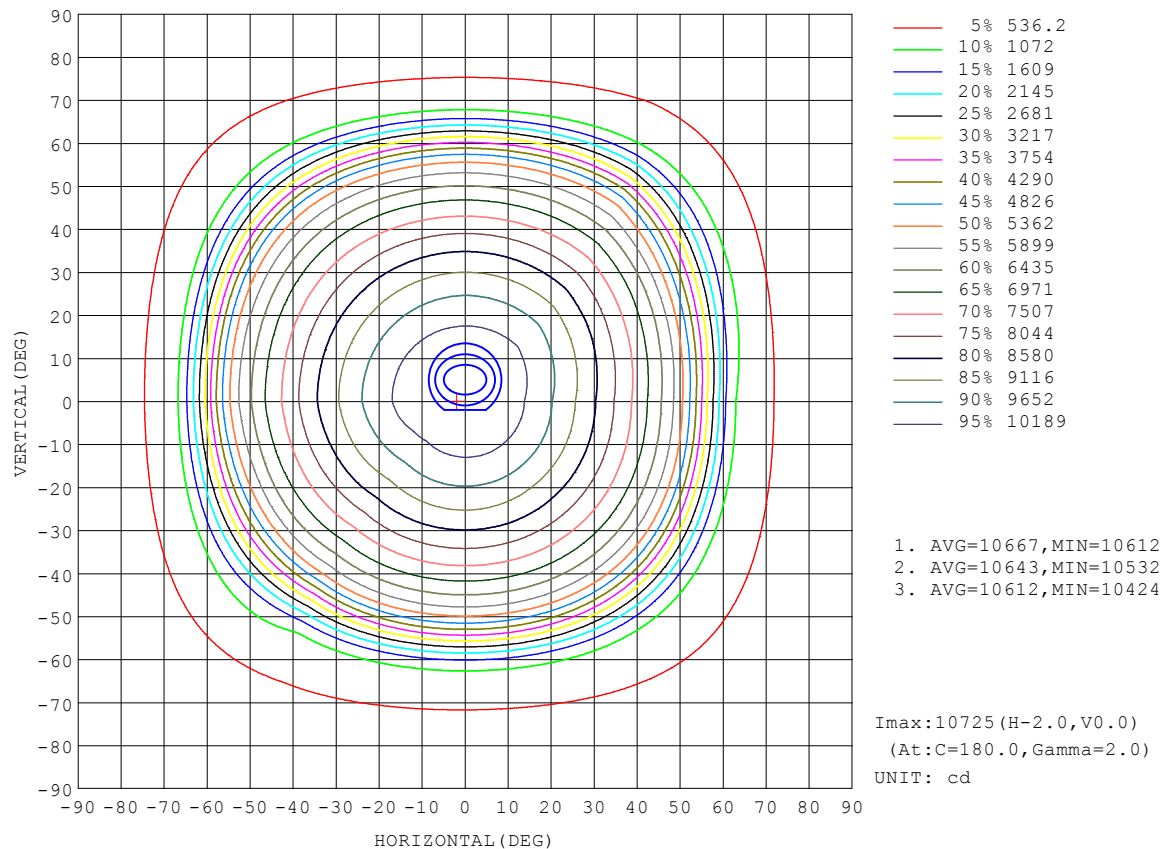


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz Lamp Flux:25217.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

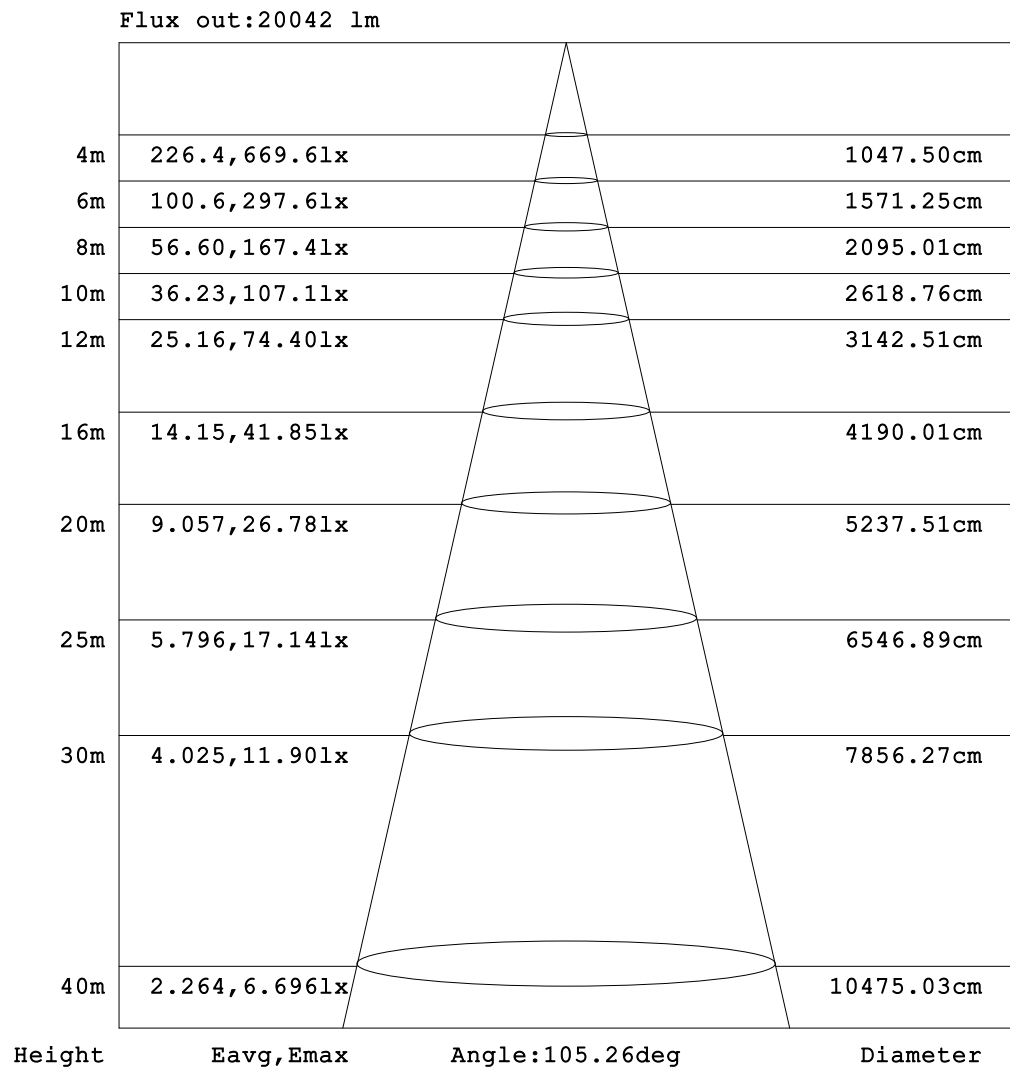


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz Lamp Flux:25217.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

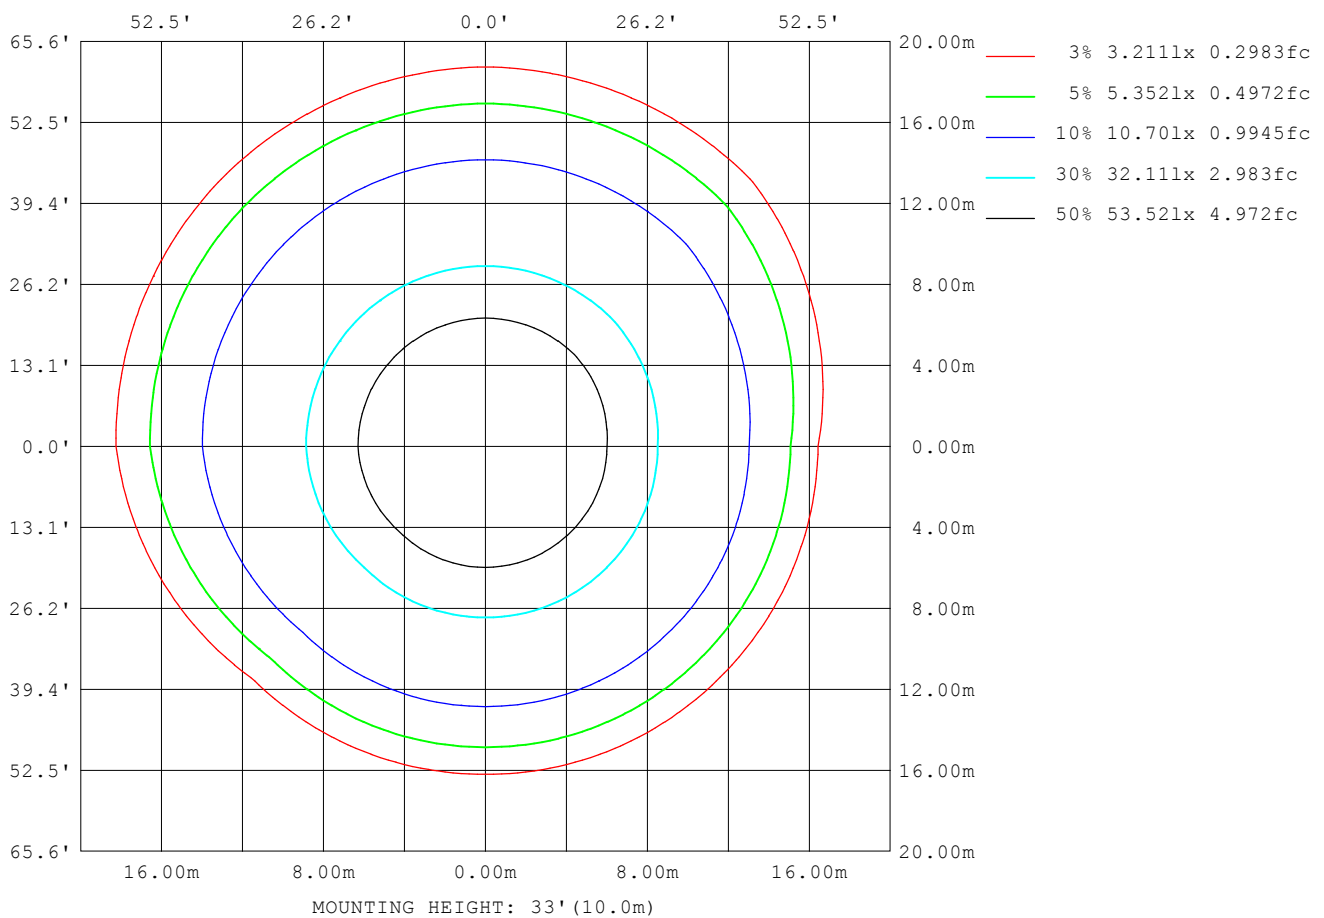

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz Lamp Flux:25217.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	28310
L_0~180 (75) av	17511
L_0~180 (85) av	13411
L_90~270 (65) av	32181
L_90~270 (75) av	18189
L_90~270 (85) av	13974
L_45 (65) av	31014
L_45 (75) av	18072
L_45 (85) av	13932

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

Planar Illuminance Curve

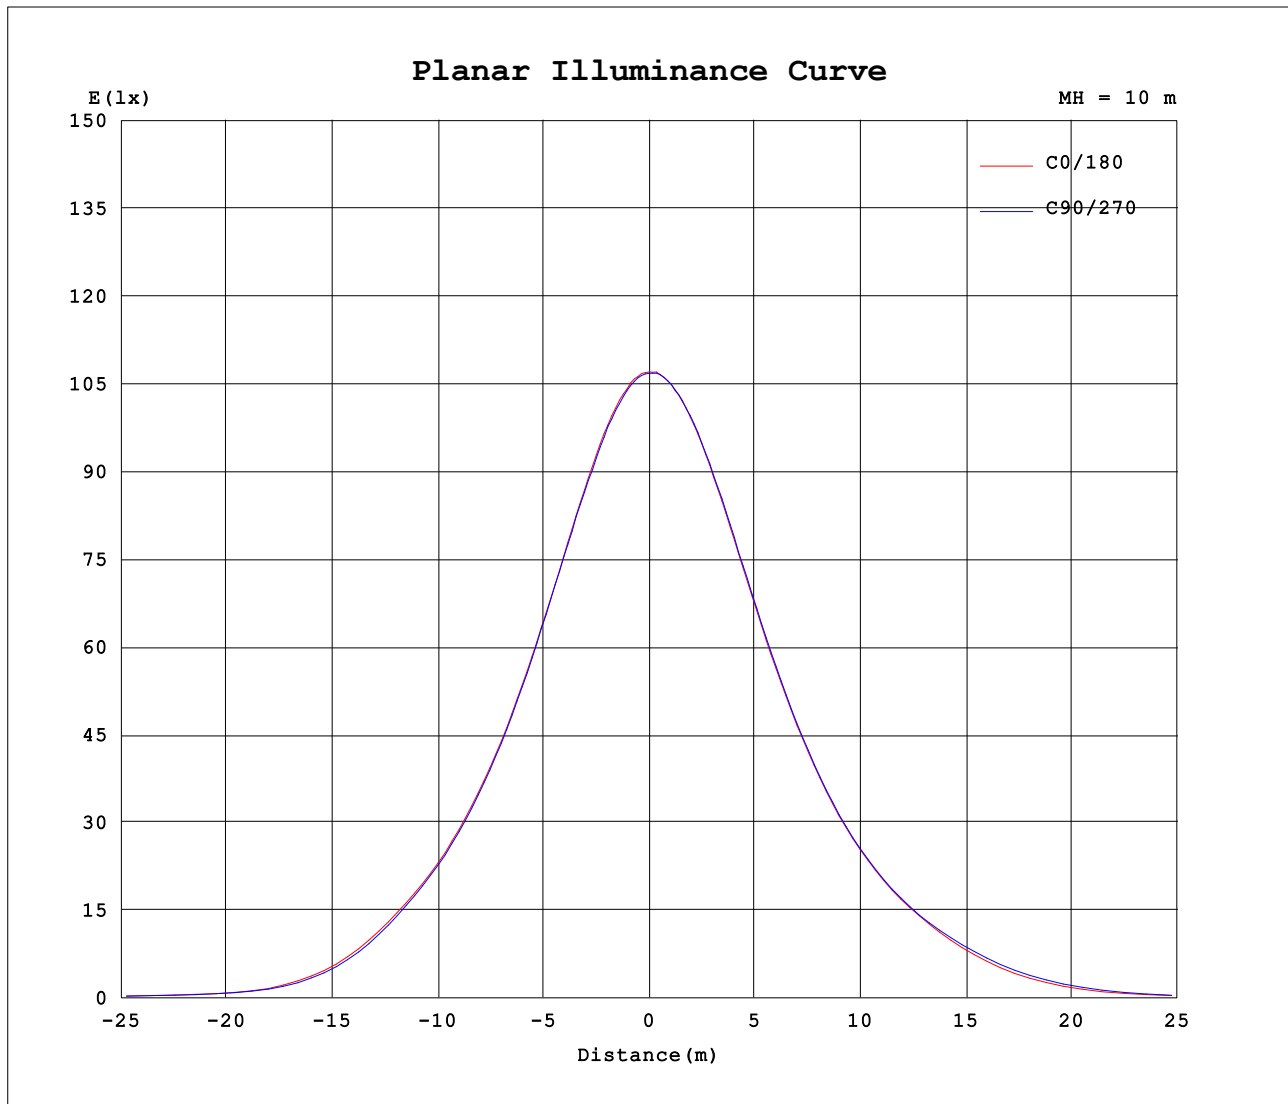

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.35V I:0.7019A P:150.98W PF:0.9852 Freq:49.99Hz Lamp Flux:25217.6x1 lm								
NAME:				TYPE:				WEIGHT:
SPEC.:				DIM.:				SERIAL No.:
MFR.: EVERFINE				SUR.:				Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1070	1071	1068	1068	1070	1071	1068	1068										
5	1064	1060	1060	1057	1068	1067	1068	1067										
10	1043	1039	1037	1034	1056	1055	1054	1057										
15	1010	1009	1003	1002	1032	1033	1035	1035										
20	967	964	962	963	998	1000	1002	1002										
25	918	912	915	913	956	958	962	961										
30	863	857	857	858	905	908	912	910										
35	800	795	793	795	849	852	856	852										
40	733	728	724	727	787	789	792	789										
45	654	647	643	646	719	723	724	721										
50	553	539	534	539	639	644	645	640										
55	376	356	350	354	528	545	551	542										
60	180	169	164	169	340	369	383	372										
65	88.1	86.1	86.1	87.5	151	174	186	177										
70	62.8	61.6	61.8	63.2	75.6	79.4	81.2	80.2										
75	39.1	38.6	39.0	40.0	51.5	54.1	55.2	54.4										
80	20.8	20.6	20.7	21.1	28.7	30.3	30.7	30.2										
85	12.6	12.6	12.5	12.6	10.7	11.9	11.8	11.6										
90	12.3	12.3	12.3	12.3	3.67	3.69	3.67	3.66										
95	12.1	12.2	12.2	12.1	3.73	3.72	3.71	3.70										
100	12.2	12.2	12.2	12.2	3.91	3.89	3.88	3.88										
105	12.3	12.3	12.3	12.3	4.21	4.18	4.16	4.16										
110	12.4	12.5	12.5	12.5	4.58	4.54	4.53	4.53										
115	12.6	12.6	12.7	12.6	5.01	4.97	4.95	4.97										
120	12.8	12.9	12.9	12.9	5.49	5.44	5.42	5.44										
125	13.1	13.1	13.2	13.2	5.99	5.94	5.94	5.96										
130	13.3	13.4	13.4	13.4	6.51	6.46	6.45	6.47										
135	13.6	13.6	13.6	13.6	6.98	6.95	6.94	6.96										
140	13.9	13.9	14.0	13.9	7.44	7.40	7.39	7.42										
145	14.3	14.3	14.3	14.3	7.96	7.92	7.91	7.94										
150	14.7	14.7	14.7	14.7	8.69	8.63	8.60	8.64										
155	15.1	15.1	15.1	15.1	9.61	9.54	9.50	9.53										
160	15.3	15.3	15.3	15.3	10.7	10.6	10.5	10.6										
165	15.3	15.3	15.3	15.3	11.8	11.7	11.6	11.7										
170	15.2	15.2	15.2	15.2	12.8	12.7	12.7	12.7										
175	15.0	14.9	14.9	14.9	13.7	13.6	13.6	13.6										
180	14.4	14.4	14.4	14.4	14.5	14.4	14.4	14.4										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks: