


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz Lamp Flux:16824.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 166.59 lm/W			
MODEL		I _{max} (cd)	7077	S/MH (C0/180)	1.28
NOMINAL POWER (W)	100	LOR (%)	100.0	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	16825	η UP, DN (C0-180)	1.6, 44.9
NOMINAL FLUX (lm)	16824.5	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 52.7
LAMPS INSIDE	1	η up (%)	2.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	220	η down (%)	97.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

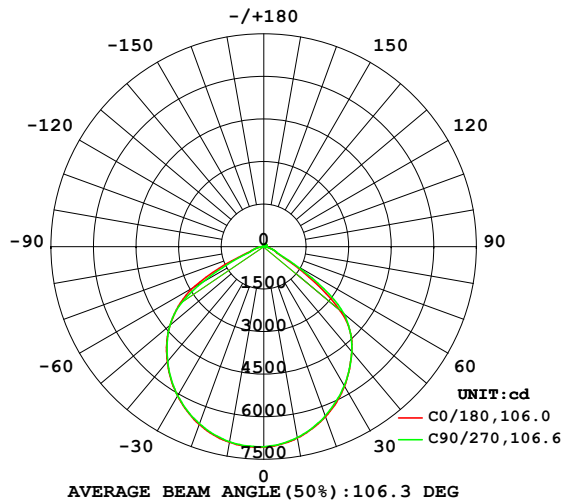

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

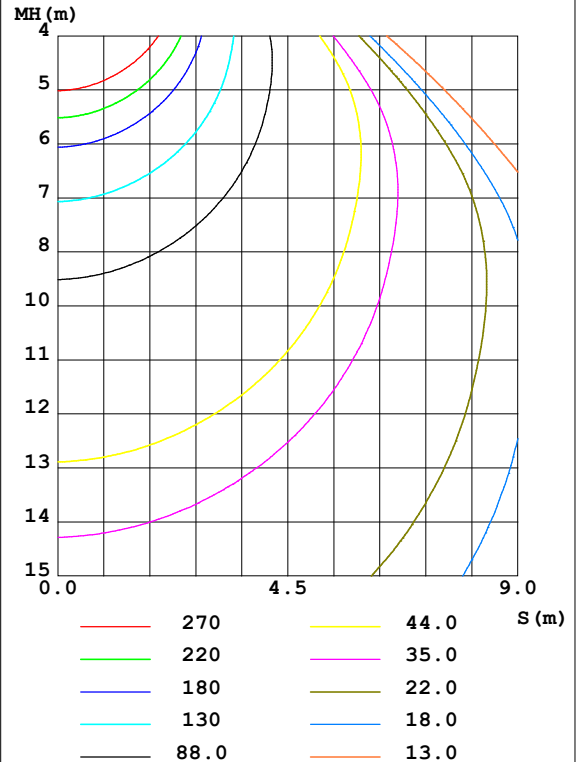

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	6846	6829	6835	6859	7007	7004	6983	6955	0- 10	666.8	666.8	3.96,3.96
20	6379	6340	6348	6408	6672	6668	6640	6593	10- 20	1901	2568	15.3,15.3
30	5694	5649	5671	5729	6081	6081	6072	6003	20- 30	2863	5431	32.3,32.3
40	4829	4819	4830	4883	5298	5298	5277	5205	30- 40	3429	8861	52.7,52.7
50	3530	3565	3684	3755	4316	4326	4319	4248	40- 50	3517	12378	73.6,73.6
60	987.9	1044	1249	1551	2819	2749	2442	2085	50- 60	2677	15055	89.5,89.5
70	376.2	373.5	384.8	409.9	530.5	511.8	475.3	444.6	60- 70	959.5	16015	95.2,95.2
80	139.9	130.6	127.5	131.9	186.1	194.5	192.8	181.5	70- 80	307.2	16322	97,97
90	82.27	82.16	82.18	82.17	24.28	24.84	25.83	25.60	80- 90	98.08	16420	97.6,97.6
100	81.83	81.80	81.60	81.35	25.80	25.80	26.08	26.44	90-100	58.11	16478	97.9,97.9
110	83.43	83.56	83.44	83.17	30.18	30.20	30.55	31.05	100-110	58.48	16536	98.3,98.3
120	86.32	86.40	86.16	85.72	36.23	36.30	36.70	37.17	110-120	58.58	16595	98.6,98.6
130	89.54	89.66	89.40	89.03	43.14	43.21	43.55	43.91	120-130	57.30	16652	99,99
140	93.45	93.41	92.95	92.43	49.35	49.35	49.59	49.93	130-140	53.25	16705	99.3,99.3
150	98.61	98.45	98.03	97.61	57.21	57.31	57.94	58.68	140-150	46.63	16752	99.6,99.6
160	102.1	102.0	101.9	101.9	70.15	70.27	70.98	71.88	150-160	37.94	16790	99.8,99.8
170	101.6	101.6	101.5	101.7	84.65	84.64	85.33	86.22	160-170	25.44	16815	99.9,99.9
180	95.95	95.99	96.39	96.92	96.26	95.94	96.57	96.87	170-180	9.054	16825	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 10645 lm

%lum = 63.3%

%lamp = 63.3%

Conical surface Flux(120deg): 15055 lm

%lum = 89.5%


%lamp = 89.5%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.850m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz Lamp Flux:16824.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

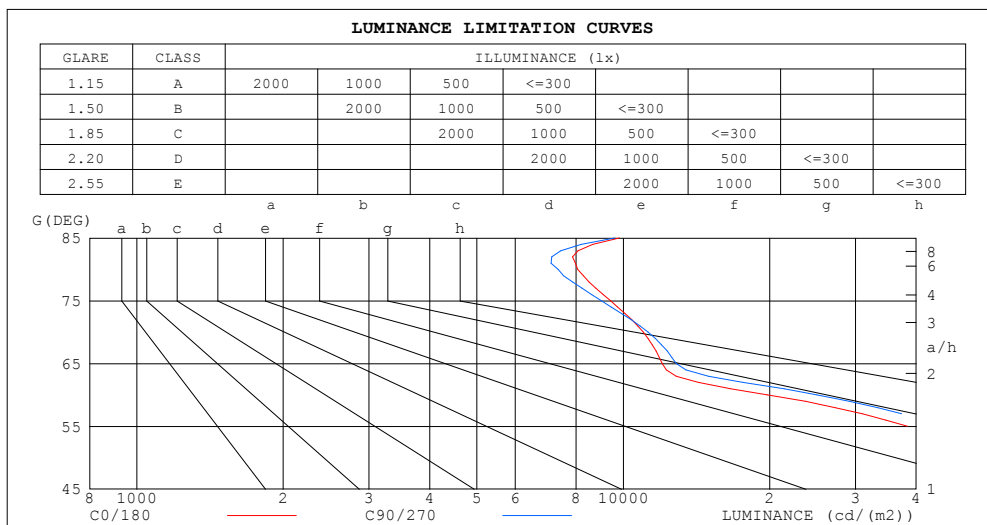

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9808	9610
80	8057	7343
75	9412	9015
70	10999	11250
65	12021	12855
60	19758	24977
55	38357	45120
50	54914	57309
45	61330	61197


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz Lamp Flux:16824.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.06	1.03	.00	1.04	1.01	.98	.99	.97	.94	.95	.93	.91	.91	.89	.88	.86
2.0	.95	.89	.84	.93	.87	.83	.89	.84	.80	.85	.82	.78	.82	.79	.76	.74
3.0	.84	.77	.71	.83	.76	.71	.79	.74	.69	.76	.72	.68	.74	.70	.66	.64
4.0	.76	.68	.62	.74	.67	.61	.71	.65	.60	.69	.63	.59	.66	.62	.58	.56
5.0	.68	.60	.54	.67	.59	.53	.64	.58	.53	.62	.56	.52	.60	.55	.51	.49
6.0	.61	.53	.47	.60	.53	.47	.58	.52	.46	.57	.51	.46	.55	.49	.45	.43
7.0	.56	.48	.42	.55	.47	.42	.53	.46	.41	.52	.46	.41	.50	.45	.40	.39
8.0	.51	.43	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.46	.41	.36	.35
9.0	.47	.39	.34	.46	.39	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.31
10.0	.43	.36	.31	.43	.36	.31	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28

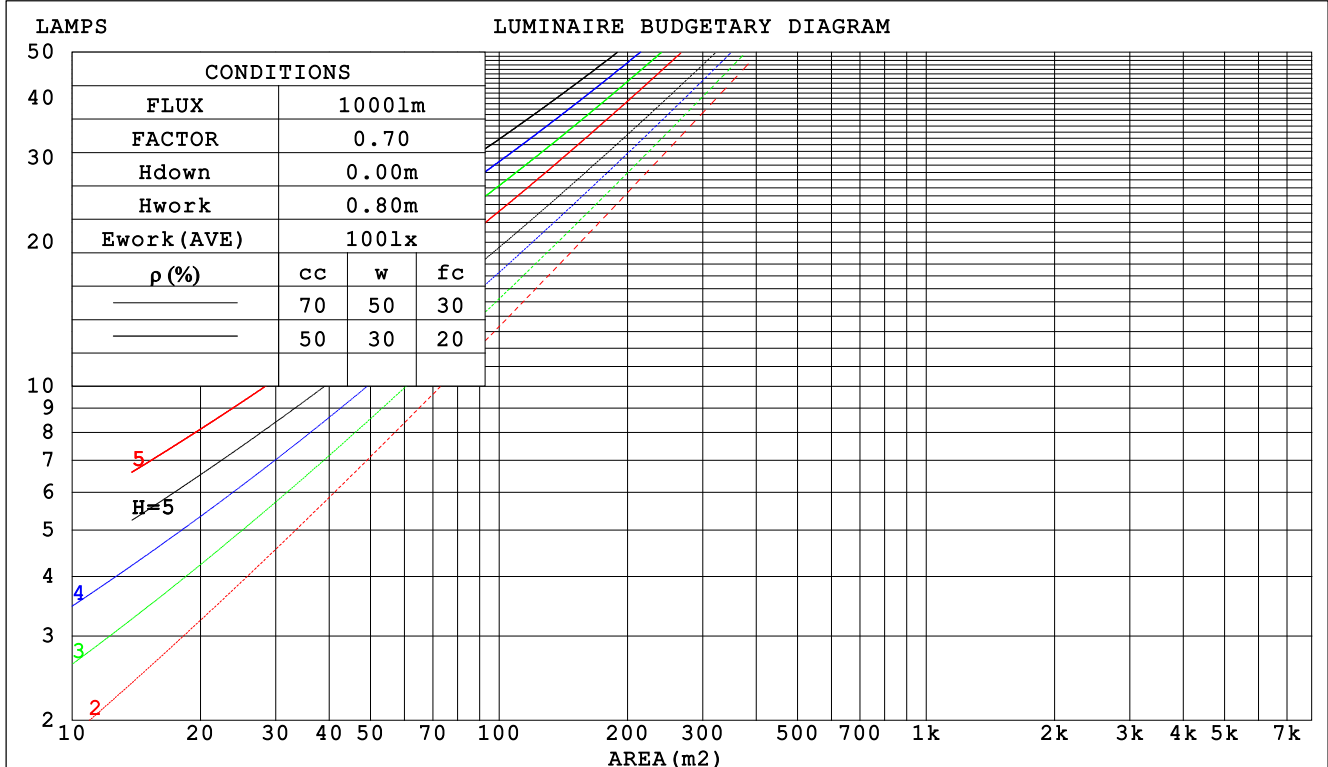

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz Lamp Flux:16824.5x1 lm								
NAME:			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.254	.144	.046	.246	.140	.045	.232	.133	.042	.218	.126	.040	.206	.120	.039		
2.0	.247	.135	.041	.240	.132	.041	.227	.126	.039	.216	.121	.038	.205	.116	.037		
3.0	.234	.125	.037	.228	.122	.037	.217	.118	.036	.207	.113	.035	.198	.109	.034		
4.0	.221	.115	.034	.216	.113	.033	.206	.109	.033	.197	.106	.032	.188	.102	.031		
5.0	.208	.106	.031	.203	.104	.030	.195	.101	.030	.186	.098	.029	.179	.095	.029		
6.0	.196	.098	.028	.191	.097	.028	.184	.094	.027	.176	.092	.027	.169	.089	.026		
7.0	.184	.091	.026	.180	.090	.026	.173	.088	.025	.167	.085	.025	.160	.083	.024		
8.0	.174	.085	.024	.170	.084	.024	.164	.082	.023	.158	.080	.023	.152	.078	.023		
9.0	.164	.079	.022	.161	.078	.022	.155	.077	.022	.150	.075	.021	.144	.073	.021		
10.0	.155	.074	.021	.152	.074	.021	.147	.072	.020	.142	.071	.020	.137	.069	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.178	.178	.178	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.195	.175	.157	.167	.150	.135	.114	.103	.094	.066	.060	.054	.021	.019	.018	
2.0	.185	.151	.122	.158	.130	.106	.108	.090	.074	.063	.052	.043	.020	.017	.014	
3.0	.176	.133	.098	.151	.115	.085	.104	.080	.060	.060	.046	.035	.019	.015	.012	
4.0	.169	.119	.081	.145	.103	.071	.100	.072	.050	.058	.042	.029	.019	.014	.010	
5.0	.162	.109	.069	.139	.094	.060	.096	.066	.043	.055	.039	.025	.018	.013	.008	
6.0	.155	.100	.061	.133	.087	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
7.0	.149	.093	.054	.128	.081	.047	.088	.057	.033	.051	.033	.020	.017	.011	.007	
8.0	.143	.087	.049	.123	.076	.043	.085	.053	.030	.050	.031	.018	.016	.010	.006	
9.0	.137	.082	.045	.118	.072	.040	.082	.050	.028	.048	.030	.017	.015	.010	.006	
10.0	.132	.078	.042	.114	.068	.037	.079	.048	.026	.046	.028	.016	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz Lamp Flux:16824.5x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.5	25.9	24.8	26.1	26.3	24.8	26.2	25.1	26.4	26.7
3H	24.5	25.8	24.8	26.0	26.3	24.8	26.1	25.2	26.3	26.6
4H	24.5	25.7	24.9	26.0	26.3	24.8	26.0	25.2	26.3	26.6
6H	24.5	25.6	24.9	25.9	26.2	24.8	25.9	25.1	26.2	26.5
8H	24.5	25.5	24.9	25.8	26.2	24.7	25.8	25.1	26.1	26.4
12H	24.5	25.5	24.8	25.8	26.1	24.7	25.7	25.1	26.1	26.4
4H 2H	24.5	25.6	24.8	25.9	26.2	24.7	25.9	25.1	26.2	26.5
3H	24.6	25.6	24.9	25.9	26.2	24.8	25.8	25.2	26.2	26.5
4H	24.6	25.5	25.0	25.9	26.2	24.9	25.8	25.3	26.1	26.5
6H	24.6	25.4	25.1	25.8	26.2	24.9	25.7	25.3	26.0	26.5
8H	24.6	25.4	25.1	25.8	26.2	24.9	25.6	25.3	26.0	26.4
12H	24.7	25.3	25.1	25.7	26.2	24.9	25.5	25.3	26.0	26.4
8H 4H	24.5	25.3	25.0	25.7	26.1	24.8	25.5	25.2	25.9	26.4
6H	24.6	25.2	25.1	25.7	26.1	24.8	25.4	25.3	25.9	26.4
8H	24.7	25.2	25.1	25.6	26.1	24.9	25.4	25.3	25.8	26.3
12H	24.7	25.2	25.2	25.6	26.2	24.9	25.3	25.4	25.8	26.4
12H 4H	24.5	25.2	25.0	25.6	26.0	24.7	25.4	25.2	25.8	26.3
6H	24.6	25.1	25.1	25.6	26.1	24.8	25.3	25.3	25.8	26.3
8H	24.6	25.1	25.2	25.6	26.1	24.8	25.3	25.4	25.8	26.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.9 / - 1.3					+ 0.7 / - 1.0				
1.5H	+ 0.6 / - 0.9					+ 0.5 / - 1.0				
2.0H	+ 2.4 / - 4.6					+ 2.3 / - 4.9				

CIE Pub.117, 16825 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 9.8)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz Lamp Flux:16824.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	61	50	44	60	50	44	59	49	43	37
0.80	72	61	55	71	61	54	69	60	54	48
1.00	81	71	65	80	70	64	77	71	64	57
1.25	88	79	73	86	78	72	84	77	71	65
1.50	93	84	78	91	83	78	88	81	76	69
2.00	99	92	86	97	90	85	93	88	84	76
2.50	102	95	90	100	94	89	96	91	87	79
3.00	105	99	94	103	97	93	98	94	91	82
4.00	108	103	99	106	101	98	101	98	95	86
5.00	110	106	102	107	104	100	103	100	97	88
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz Lamp Flux:16824.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

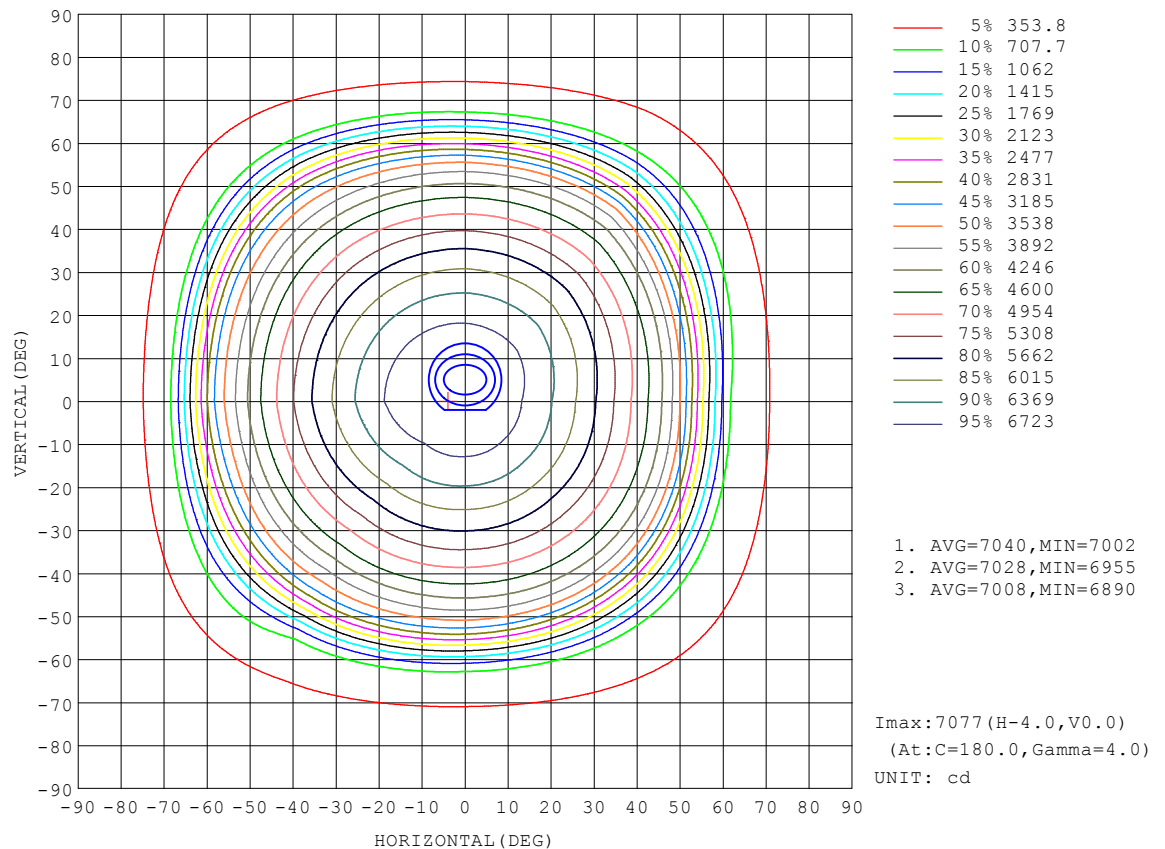


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz Lamp Flux:16824.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

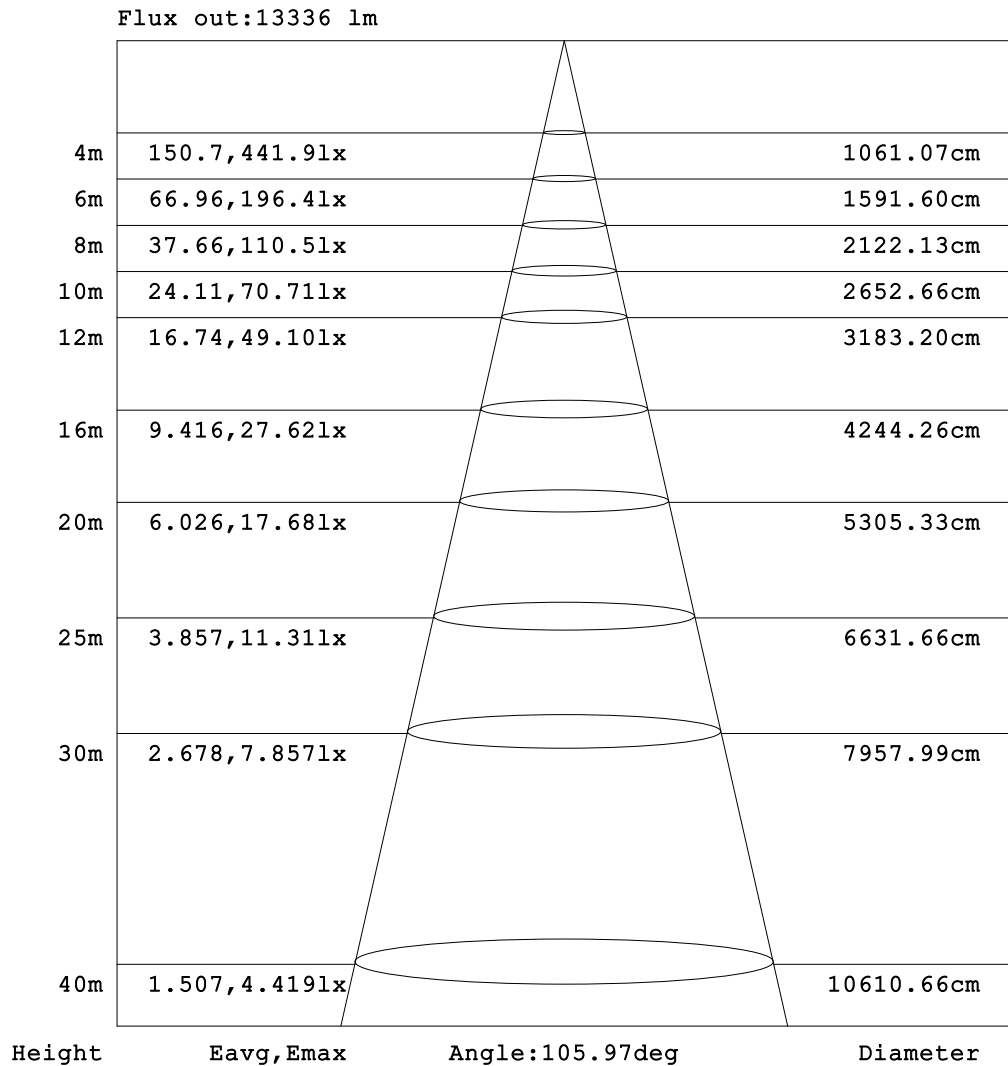


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz Lamp Flux:16824.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

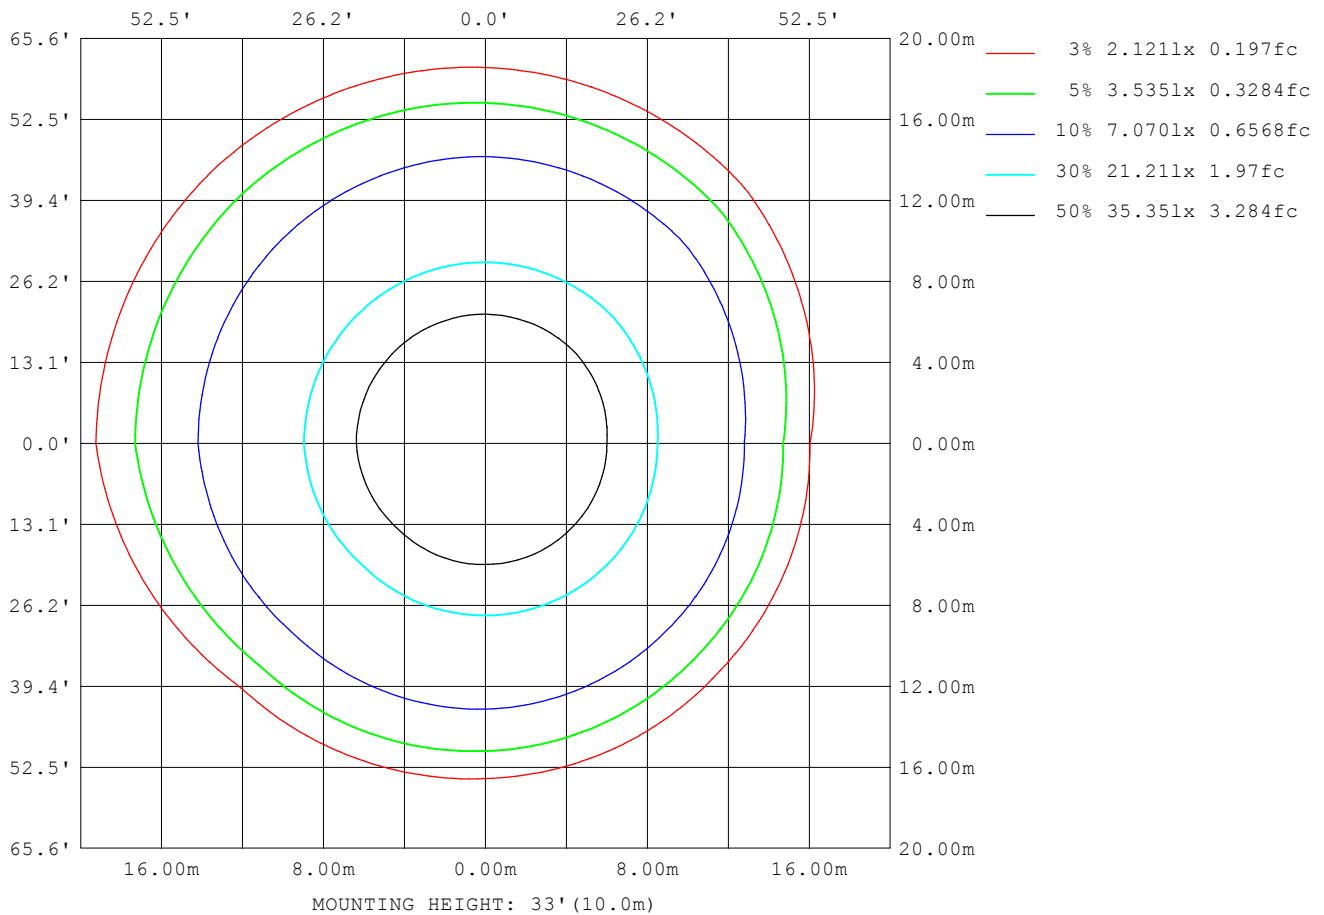

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz Lamp Flux:16824.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	23688
L_0~180 (75) av	11448
L_0~180 (85) av	9006
L_90~270 (65) av	20129
L_90~270 (75) av	10962
L_90~270 (85) av	9561
L_45 (65) av	20168
L_45 (75) av	11062
L_45 (85) av	9318

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

Planar Illuminance Curve

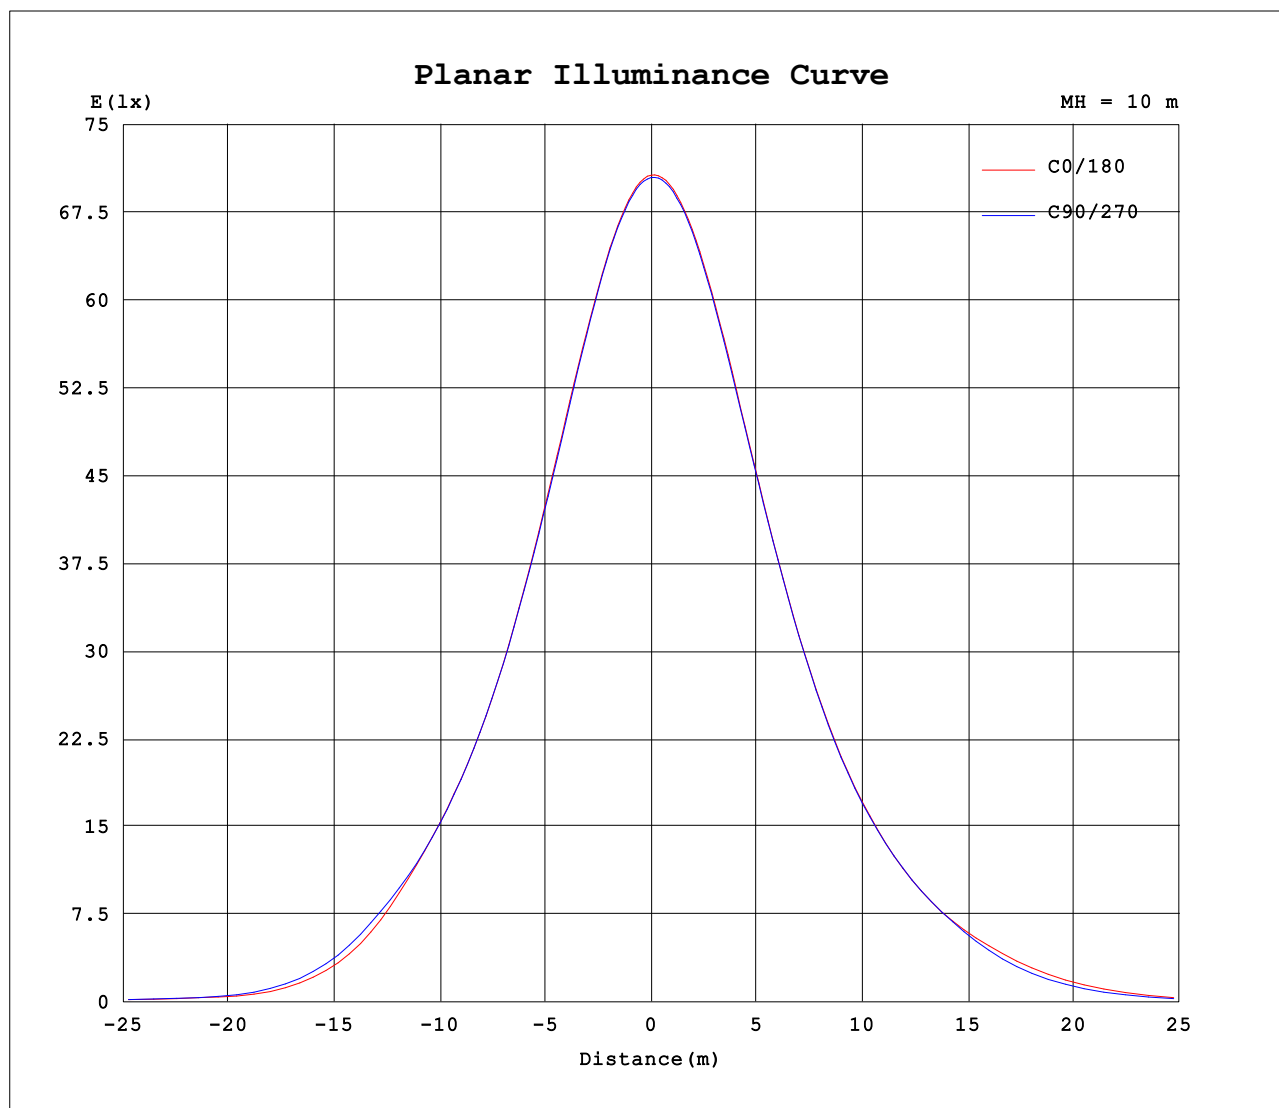

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.45V I:0.4717A P:100.99W PF:0.9802 Freq:49.99Hz Lamp Flux:16824.5x1 lm								
NAME:				TYPE:				WEIGHT:
SPEC.:				DIM.:				SERIAL No.:
MFR.: EVERFINE				SUR.:				Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	7070	7057	7051	7049	7070	7057	7051	7049										
5	6996	6989	6975	6983	7071	7065	7050	7037										
10	6846	6829	6835	6859	7007	7004	6983	6955										
15	6642	6614	6621	6662	6873	6869	6845	6802										
20	6379	6340	6348	6408	6672	6668	6640	6593										
25	6063	6018	6025	6089	6402	6398	6379	6328										
30	5694	5649	5671	5729	6081	6081	6072	6003										
35	5270	5248	5264	5323	5709	5713	5701	5627										
40	4829	4819	4830	4883	5298	5298	5277	5205										
45	4337	4309	4327	4379	4845	4845	4819	4755										
50	3530	3565	3684	3755	4316	4326	4319	4248										
55	2200	2282	2588	2893	3676	3704	3643	3415										
60	988	1044	1249	1551	2819	2749	2442	2085										
65	508	515	543	592	1494	1402	1158	900										
70	376	374	385	410	530	512	475	445										
75	244	234	233	249	349	348	334	314										
80	140	131	128	132	186	195	193	181										
85	85.5	84.0	83.8	83.7	71.5	79.3	82.9	77.9										
90	82.3	82.2	82.2	82.2	24.3	24.8	25.8	25.6										
95	81.5	81.5	81.4	81.2	24.6	24.6	24.8	25.0										
100	81.8	81.8	81.6	81.3	25.8	25.8	26.1	26.4										
105	82.6	82.7	82.5	82.2	27.7	27.7	28.0	28.5										
110	83.4	83.6	83.4	83.2	30.2	30.2	30.5	31.1										
115	84.6	84.8	84.5	84.3	33.0	33.1	33.5	34.0										
120	86.3	86.4	86.2	85.7	36.2	36.3	36.7	37.2										
125	88.0	88.1	87.9	87.4	39.7	39.7	40.1	40.6										
130	89.5	89.7	89.4	89.0	43.1	43.2	43.6	43.9										
135	91.4	91.4	91.0	90.6	46.4	46.4	46.6	46.9										
140	93.5	93.4	92.9	92.4	49.4	49.4	49.6	49.9										
145	95.8	95.8	95.3	94.8	52.6	52.6	53.1	53.6										
150	98.6	98.5	98.0	97.6	57.2	57.3	57.9	58.7										
155	101	101	100	100	63.2	63.4	64.1	64.9										
160	102	102	102	102	70.1	70.3	71.0	71.9										
165	102	102	102	102	77.6	77.6	78.4	79.3										
170	102	102	101	102	84.7	84.6	85.3	86.2										
175	99.6	99.7	99.8	100	90.9	90.8	91.5	92.2										
180	96.0	96.0	96.4	96.9	96.3	95.9	96.6	96.9										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks: