


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:218.49V I:0.7148A P:151.39W PF:0.9694 Freq:50.08Hz Lamp Flux:17888.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.31m*0.31m	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 118.17 lm/W			
MODEL		Imax(cd)	16687	S/MH(C0/180)	0.91
NOMINAL POWER(W)	150	LOR(%)	100.0	S/MH(C90/270)	1.09
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	17889	η UP,DN(C0-180)	1.7,45.5
NOMINAL FLUX(lm)	17888.8	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.8,52.0
LAMPS INSIDE	1	η up(%)	2.5	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	220	η down(%)	97.5	CIBSE SHR MAX	0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

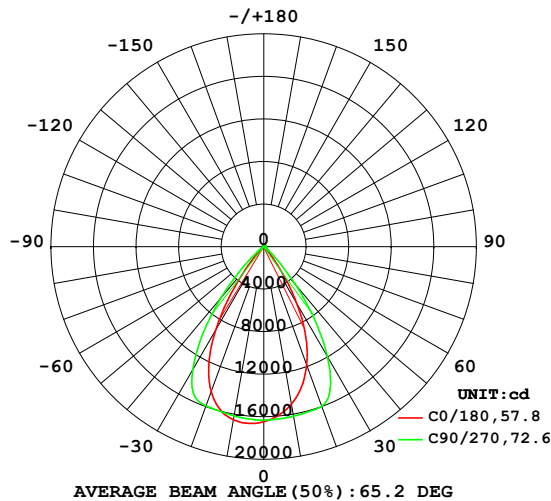

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

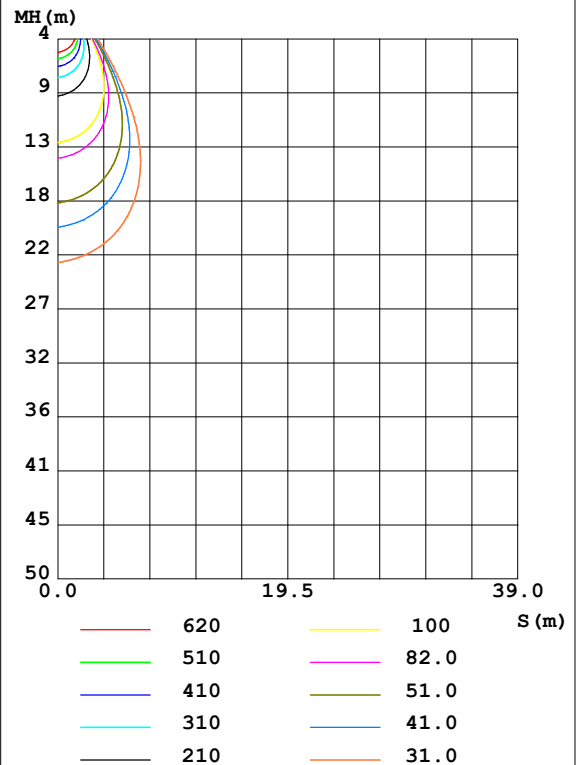

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1504	1543	1618	1617	1653	1640	1615	1552	0- 10	1541	1541	8.61,8.61
20	1181	1338	1597	1493	1450	1540	1594	1394	10- 20	4320	5861	32.8,32.8
30	636.9	864.0	1199	1007	906.1	1193	1338	1017	20- 30	5828	11689	65.3,65.3
40	116.6	237.9	460.4	268.7	225.5	433.9	622.3	345.5	30- 40	4107	15796	88.3,88.3
50	25.91	38.12	70.40	40.49	21.13	51.98	104.2	46.84	40- 50	1173	16968	94.9,94.9
60	16.44	18.22	22.10	18.99	9.397	11.65	16.61	11.24	50- 60	235.9	17204	96.2,96.2
70	10.73	11.60	13.20	11.91	5.525	6.193	7.739	6.066	60- 70	118.9	17323	96.8,96.8
80	7.324	7.703	8.217	7.879	2.992	3.172	3.340	3.038	70- 80	74.10	17397	97.3,97.3
90	5.965	6.323	6.673	6.337	1.933	2.052	2.129	1.932	80- 90	51.09	17448	97.5,97.5
100	6.119	6.549	6.885	6.390	1.551	1.655	1.750	1.627	90-100	44.09	17493	97.8,97.8
110	7.563	7.861	8.100	7.571	1.681	1.808	2.006	1.880	100-110	46.25	17539	98,98
120	9.741	9.727	9.692	9.358	2.467	2.722	3.094	2.919	110-120	54.17	17593	98.3,98.3
130	11.87	11.46	11.12	11.15	4.052	4.376	4.894	4.720	120-130	63.33	17656	98.7,98.7
140	13.20	12.59	12.12	12.48	6.279	6.516	6.927	6.902	130-140	68.05	17724	99.1,99.1
150	13.56	13.11	12.87	13.28	8.597	8.592	8.615	8.771	140-150	64.67	17789	99.4,99.4
160	13.36	13.44	13.54	13.63	10.42	10.29	9.984	10.08	150-160	52.60	17842	99.7,99.7
170	13.43	13.87	14.04	13.70	11.98	11.97	11.82	11.67	160-170	34.80	17876	99.9,99.9
180	13.08	13.41	13.42	13.09	13.16	13.34	13.47	13.06	170-180	12.44	17889	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 16625 lm

%lum = 92.9%

%lamp = 92.9%

Conical surface Flux(120deg): 17204 lm

%lum = 96.2%


%lamp = 96.2%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.850m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:218.49V I:0.7148A P:151.39W PF:0.9694 Freq:50.08Hz Lamp Flux:17888.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.31m*0.31m	Shielding Angle:

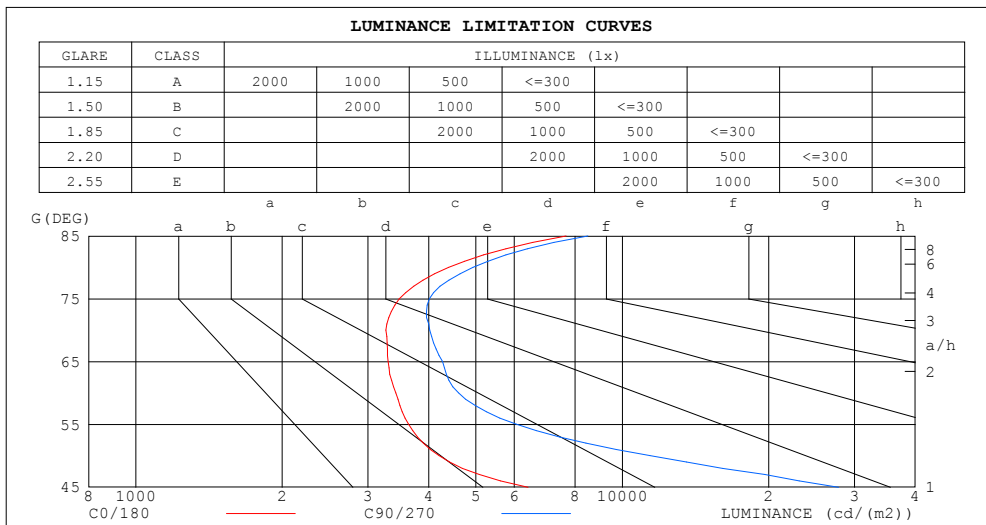

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7668	8501
80	4393	4929
75	3483	4011
70	3267	4020
65	3299	4271
60	3426	4605
55	3636	6059
50	4198	11408
45	6400	27828


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:218.49V I:0.7148A P:151.39W PF:0.9694 Freq:50.08Hz Lamp Flux:17888.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.31m*0.31m	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.10	1.07	1.05	1.07	1.05	1.03	1.03	1.01	.99	.98	.97	.96	.95	.94	.92	.90
2.0	1.01	.97	.94	.99	.96	.92	.96	.93	.90	.92	.90	.88	.89	.87	.85	.84
3.0	.94	.89	.85	.92	.88	.84	.89	.85	.82	.87	.83	.81	.84	.81	.79	.77
4.0	.87	.82	.77	.86	.81	.77	.84	.79	.75	.81	.77	.74	.79	.76	.73	.72
5.0	.82	.75	.71	.80	.75	.70	.78	.73	.70	.76	.72	.69	.75	.71	.68	.66
6.0	.76	.70	.65	.75	.69	.65	.73	.68	.64	.72	.67	.64	.70	.66	.63	.62
7.0	.71	.65	.61	.70	.65	.60	.69	.64	.60	.68	.63	.59	.66	.62	.59	.57
8.0	.67	.61	.56	.66	.60	.56	.65	.60	.56	.64	.59	.55	.62	.58	.55	.54
9.0	.63	.57	.53	.62	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.51	.50
10.0	.59	.53	.49	.59	.53	.49	.58	.52	.49	.57	.52	.49	.56	.51	.48	.47

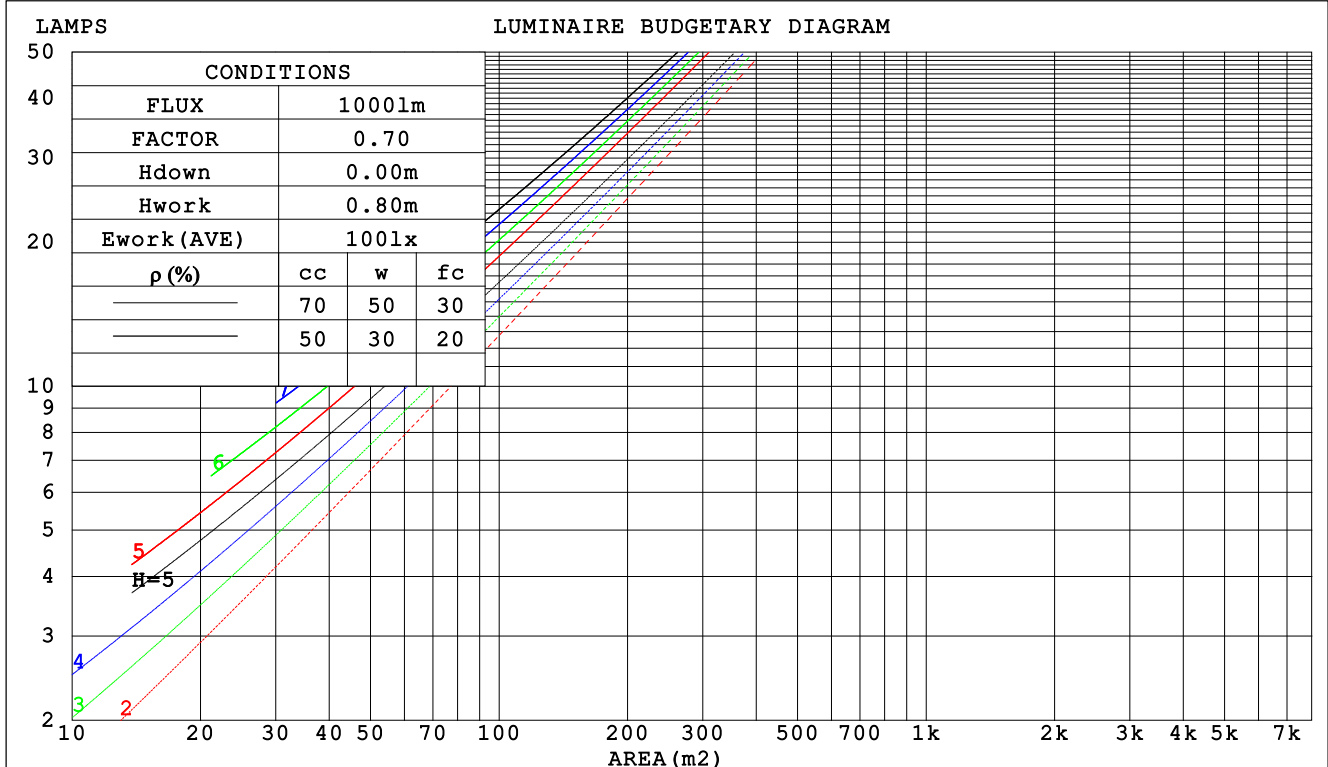

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:218.49V I:0.7148A P:151.39W PF:0.9694 Freq:50.08Hz Lamp Flux:17888.8x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.: EVERFINE		SUR.:0.31m*0.31m		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.190	.108	.034	.182	.104	.033	.168	.096	.031	.155	.089	.029	.143	.083	.027		
2.0	.181	.099	.030	.174	.096	.030	.162	.090	.028	.151	.085	.027	.141	.080	.025		
3.0	.172	.091	.027	.166	.089	.027	.156	.085	.026	.146	.080	.025	.137	.076	.024		
4.0	.163	.085	.025	.159	.083	.025	.150	.079	.024	.141	.076	.023	.133	.072	.022		
5.0	.156	.079	.023	.151	.078	.023	.143	.075	.022	.136	.072	.021	.129	.069	.021		
6.0	.148	.074	.021	.145	.073	.021	.137	.070	.020	.131	.068	.020	.125	.066	.019		
7.0	.142	.070	.020	.138	.069	.020	.132	.067	.019	.126	.065	.019	.120	.063	.018		
8.0	.135	.066	.019	.132	.065	.018	.127	.063	.018	.121	.061	.018	.116	.060	.017		
9.0	.130	.063	.018	.127	.062	.017	.122	.060	.017	.117	.059	.017	.112	.057	.016		
10.0	.124	.060	.017	.122	.059	.016	.117	.057	.016	.113	.056	.016	.108	.054	.016		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.191	.176	.163	.163	.151	.140	.112	.104	.097	.064	.060	.056	.021	.019	.018	
2.0	.176	.151	.130	.151	.130	.113	.104	.090	.079	.060	.052	.046	.019	.017	.015	
3.0	.165	.133	.107	.141	.115	.093	.097	.080	.065	.056	.046	.038	.018	.015	.013	
4.0	.155	.118	.090	.133	.102	.078	.091	.071	.055	.053	.042	.033	.017	.014	.011	
5.0	.147	.107	.078	.126	.092	.067	.087	.065	.048	.050	.038	.028	.016	.012	.009	
6.0	.139	.098	.068	.120	.085	.059	.083	.059	.042	.048	.035	.025	.015	.011	.008	
7.0	.133	.090	.060	.115	.078	.053	.079	.055	.037	.046	.032	.022	.015	.011	.007	
8.0	.128	.084	.055	.110	.073	.048	.076	.051	.034	.044	.030	.020	.014	.010	.007	
9.0	.123	.079	.050	.106	.069	.044	.073	.048	.031	.043	.029	.018	.014	.009	.006	
10.0	.118	.075	.046	.102	.065	.040	.071	.046	.029	.041	.027	.017	.013	.009	.006	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:218.49V I:0.7148A P:151.39W PF:0.9694 Freq:50.08Hz Lamp Flux:17888.8x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.31m*0.31m			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.0	17.0	16.3	17.2	17.4	19.8	20.8	20.1	21.0	21.2
3H	16.0	16.9	16.3	17.2	17.4	19.7	20.6	20.0	20.9	21.1
4H	16.1	16.9	16.4	17.2	17.5	19.7	20.5	20.0	20.8	21.1
6H	16.2	17.0	16.5	17.3	17.6	19.7	20.5	20.0	20.8	21.1
8H	16.3	17.1	16.6	17.4	17.7	19.7	20.5	20.1	20.8	21.1
12H	16.4	17.2	16.8	17.5	17.8	19.7	20.5	20.1	20.8	21.1
4H 2H	15.9	16.7	16.2	17.0	17.3	19.6	20.4	19.9	20.7	21.0
3H	16.0	16.7	16.3	17.0	17.4	19.5	20.2	19.9	20.6	20.9
4H	16.1	16.8	16.5	17.1	17.5	19.5	20.2	19.9	20.5	20.9
6H	16.3	16.9	16.8	17.3	17.7	19.6	20.1	20.0	20.5	20.9
8H	16.5	17.1	17.0	17.5	17.9	19.6	20.2	20.1	20.6	21.0
12H	16.8	17.3	17.2	17.7	18.1	19.7	20.2	20.2	20.6	21.1
8H 4H	16.1	16.6	16.5	17.0	17.5	19.4	20.0	19.9	20.4	20.8
6H	16.5	16.9	16.9	17.4	17.8	19.5	20.0	20.0	20.4	20.9
8H	16.8	17.2	17.3	17.6	18.1	19.7	20.0	20.1	20.5	21.0
12H	17.2	17.6	17.7	18.0	18.6	19.9	20.2	20.4	20.7	21.2
12H 4H	16.1	16.6	16.6	17.0	17.4	19.4	19.9	19.8	20.3	20.7
6H	16.5	16.9	17.0	17.4	17.9	19.5	19.9	20.0	20.4	20.9
8H	16.9	17.2	17.4	17.7	18.2	19.7	20.0	20.2	20.5	21.0
Variations with the observer position at spacings:										
S = 1.0H	+ 1.6 / - 2.1					+ 3.7 / - 5.1				
1.5H	+ 3.2 / - 2.1					+ 5.9 / - 5.2				
2.0H	+ 0.9 / - 0.4					+ 5.4 / - 1.8				

CIE Pub.117, 17889 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 10.0)
Area: 0.096 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:218.49V I:0.7148A P:151.39W PF:0.9694 Freq:50.08Hz Lamp Flux:17888.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.31m*0.31m	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	86	82	91	85	81	90	84	81	77
1.00	97	91	87	96	90	87	94	90	86	81
1.25	101	95	92	100	95	91	98	93	90	86
1.50	104	99	95	103	98	95	100	96	93	88
2.00	107	102	99	105	101	98	102	99	96	90
2.50	109	105	101	107	103	100	103	100	98	92
3.00	110	107	104	108	105	102	105	102	100	93
4.00	113	109	107	110	108	105	106	104	102	95
5.00	114	111	109	111	109	107	107	105	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.49V I:0.7148A P:151.39W PF:0.9694 Freq:50.08Hz Lamp Flux:17888.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.31m*0.31m	Shielding Angle:

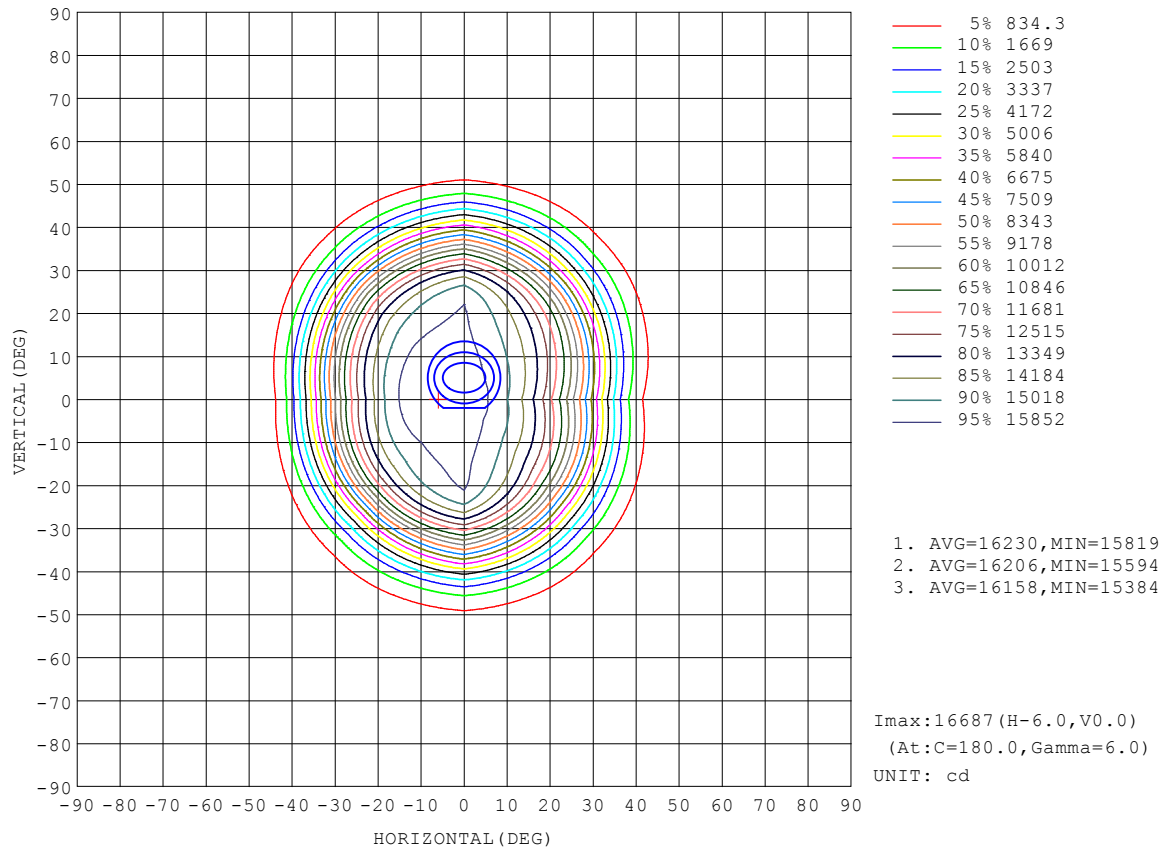


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.49V I:0.7148A P:151.39W PF:0.9694 Freq:50.08Hz Lamp Flux:17888.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.31m*0.31m	Shielding Angle:

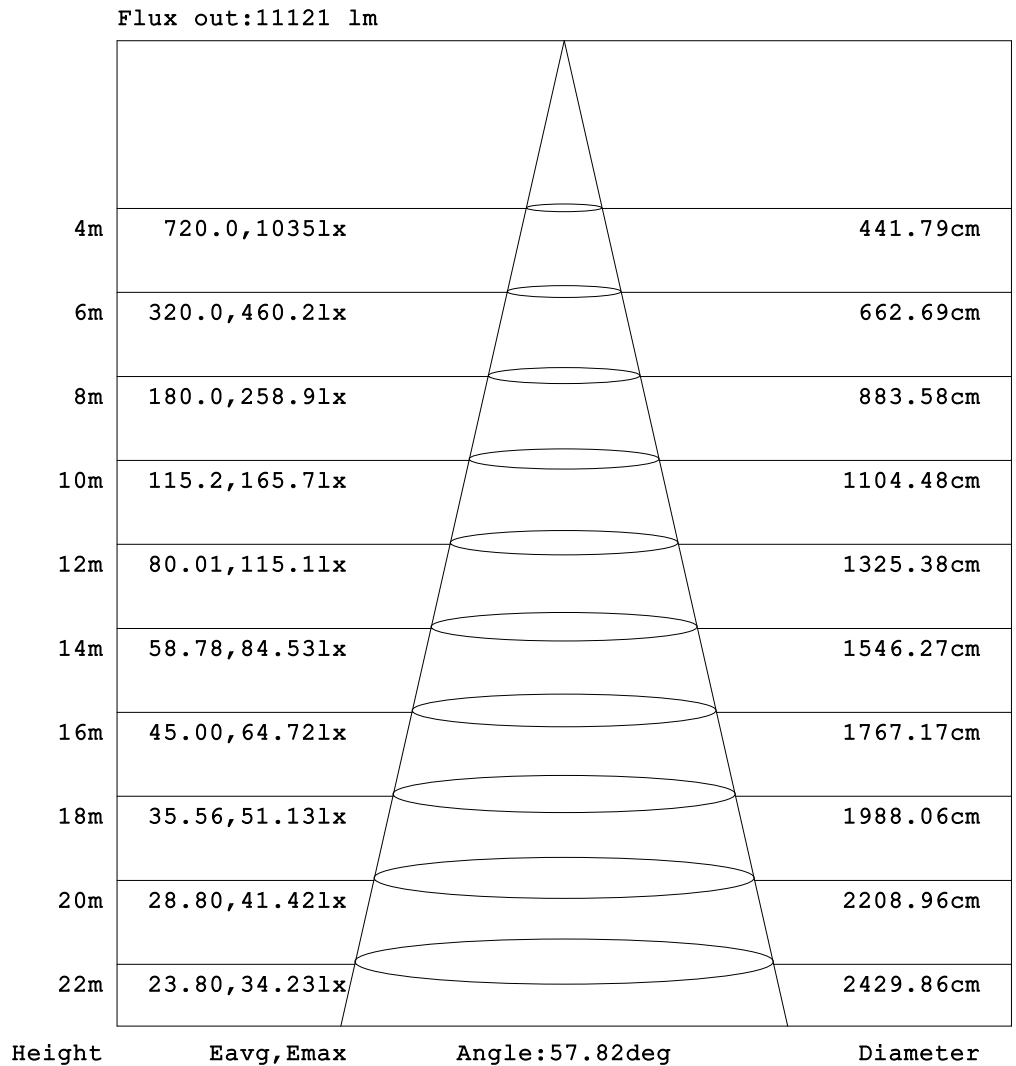


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:218.49V I:0.7148A P:151.39W PF:0.9694 Freq:50.08Hz Lamp Flux:17888.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.31m*0.31m	Shielding Angle:

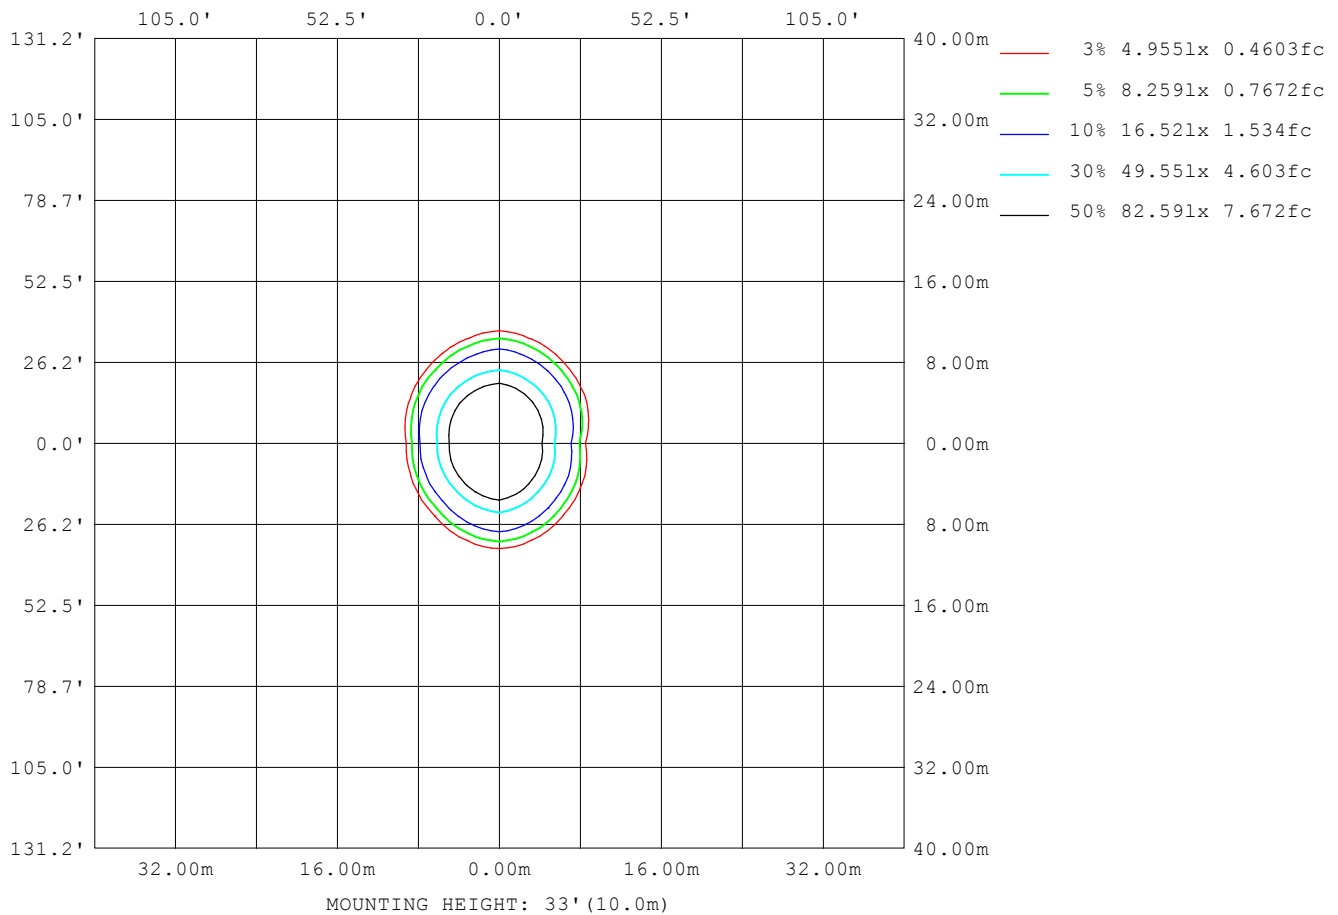

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:218.49V I:0.7148A P:151.39W PF:0.9694 Freq:50.08Hz Lamp Flux:17888.8x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.31m*0.31m	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2533
L_0~180 (75) av	2542
L_0~180 (85) av	5243
L_90~270 (65) av	3437
L_90~270 (75) av	3027
L_90~270 (85) av	5800
L_45 (65) av	2866
L_45 (75) av	2747
L_45 (85) av	5511

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

Planar Illuminance Curve

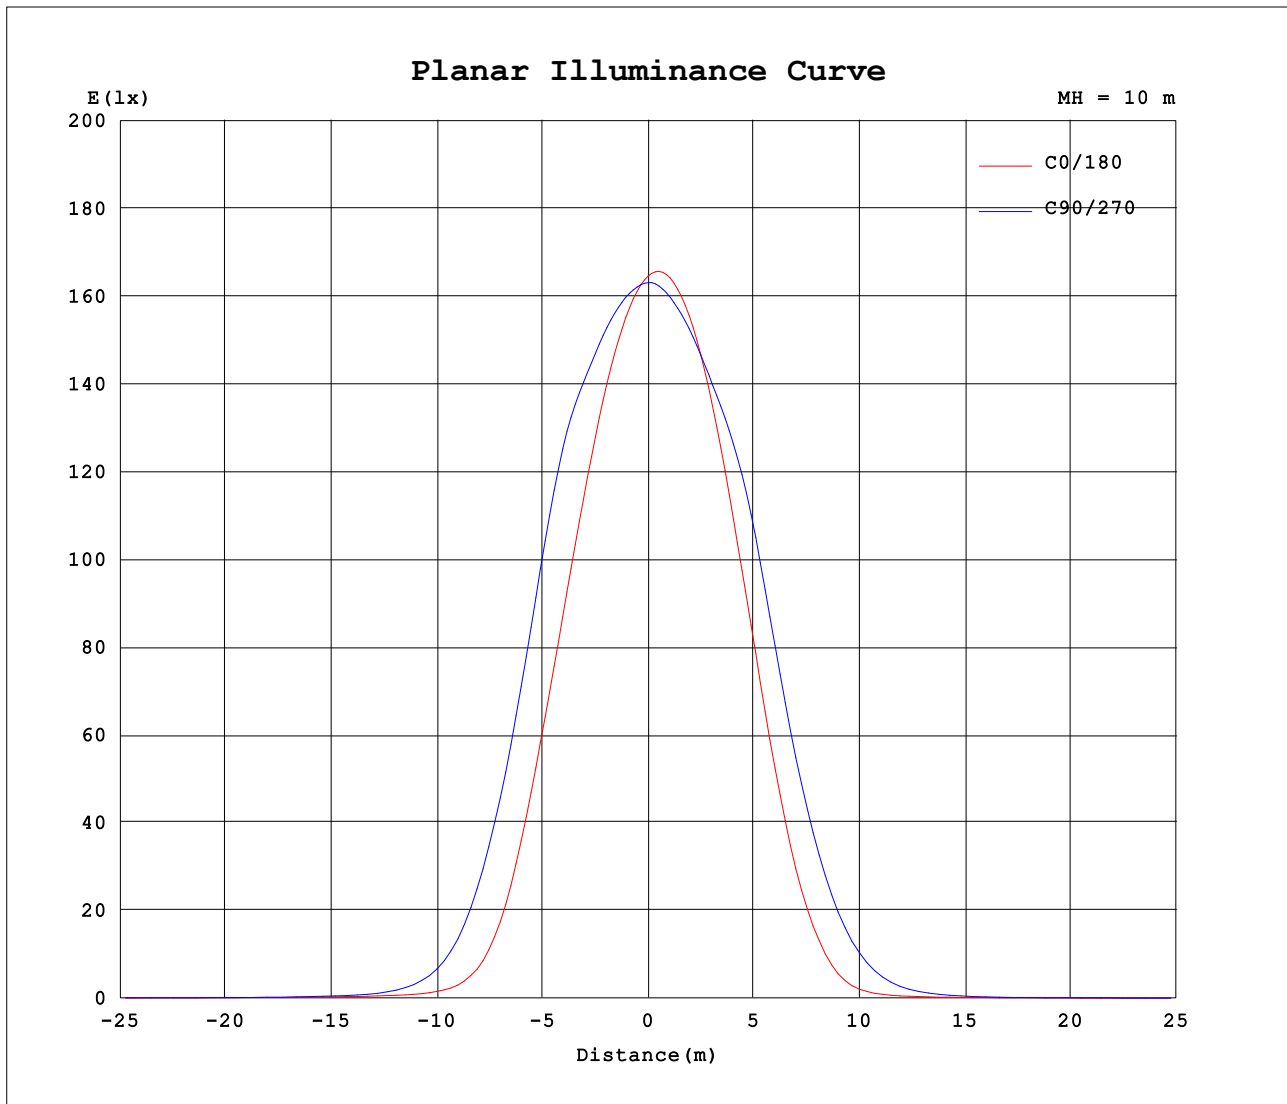

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.49V I:0.7148A P:151.39W PF:0.9694 Freq:50.08Hz Lamp Flux:17888.8x1 lm								
NAME:				TYPE:				WEIGHT:
SPEC.:				DIM.:				SERIAL No.:
MFR.: EVERFINE				SUR.:0.31m*0.31m				Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1646	1636	1631	1630	1646	1636	1631	1630										
5	1592	1599	1625	1635	1668	1650	1626	1600										
10	1504	1543	1618	1617	1653	1640	1615	1552										
15	1370	1460	1607	1575	1588	1607	1603	1487										
20	1181	1338	1597	1493	1450	1540	1594	1394										
25	939	1153	1479	1325	1228	1421	1546	1251										
30	637	864	1199	1007	906	1193	1338	1017										
35	318	516	831	593	537	828	998	674										
40	117	238	460	269	225	434	622	346										
45	43.4	89.6	189	98.7	59.6	167	297	138										
50	25.9	38.1	70.4	40.5	21.1	52.0	104	46.8										
55	20.0	23.6	33.4	24.7	12.8	19.9	35.8	19.0										
60	16.4	18.2	22.1	19.0	9.40	11.7	16.6	11.2										
65	13.4	14.7	17.3	15.2	7.17	8.42	10.6	8.15										
70	10.7	11.6	13.2	11.9	5.53	6.19	7.74	6.07										
75	8.65	9.22	9.97	9.46	3.98	4.37	5.08	4.26										
80	7.32	7.70	8.22	7.88	2.99	3.17	3.34	3.04										
85	6.42	6.76	7.11	6.83	2.36	2.50	2.59	2.35										
90	5.96	6.32	6.67	6.34	1.93	2.05	2.13	1.93										
95	5.86	6.27	6.61	6.20	1.68	1.80	1.88	1.72										
100	6.12	6.55	6.88	6.39	1.55	1.66	1.75	1.63										
105	6.71	7.10	7.41	6.87	1.55	1.65	1.78	1.67										
110	7.56	7.86	8.10	7.57	1.68	1.81	2.01	1.88										
115	8.60	8.76	8.88	8.43	1.97	2.16	2.45	2.29										
120	9.74	9.73	9.69	9.36	2.47	2.72	3.09	2.92										
125	10.9	10.7	10.5	10.3	3.16	3.47	3.93	3.74										
130	11.9	11.5	11.1	11.1	4.05	4.38	4.89	4.72										
135	12.7	12.1	11.7	11.9	5.11	5.42	5.92	5.81										
140	13.2	12.6	12.1	12.5	6.28	6.52	6.93	6.90										
145	13.5	12.9	12.5	12.9	7.49	7.62	7.86	7.94										
150	13.6	13.1	12.9	13.3	8.60	8.59	8.62	8.77										
155	13.5	13.3	13.2	13.5	9.57	9.47	9.27	9.43										
160	13.4	13.4	13.5	13.6	10.4	10.3	9.98	10.1										
165	13.3	13.7	13.8	13.7	11.2	11.1	10.9	10.9										
170	13.4	13.9	14.0	13.7	12.0	12.0	11.8	11.7										
175	13.4	13.8	13.9	13.5	12.6	12.7	12.7	12.4										
180	13.1	13.4	13.4	13.1	13.2	13.3	13.5	13.1										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks: