


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:218.62V I:0.7084A P:150.04W PF:0.9688 Freq:50.08Hz Lamp Flux:20025.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 133.46 lm/W			
MODEL		I _{max} (cd)	18616	S/MH (C0/180)	0.91
NOMINAL POWER (W)	150	LOR (%)	100.0	S/MH (C90/270)	1.08
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	20025	η UP, DN (C0-180)	1.7, 46.1
NOMINAL FLUX (lm)	20025.3	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 51.5
LAMPS INSIDE	1	η up (%)	2.5	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	220	η down (%)	97.5	CIBSE SHR MAX	0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

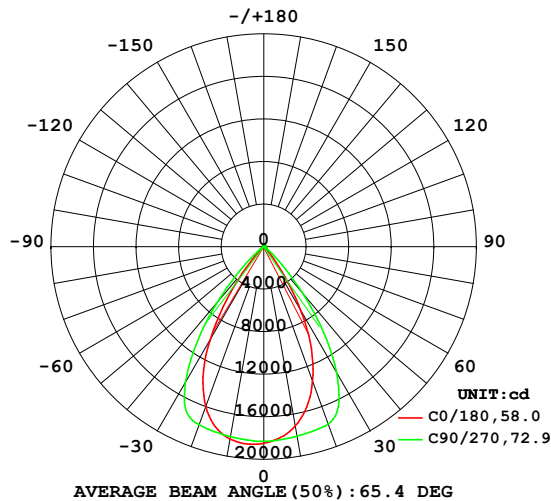

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

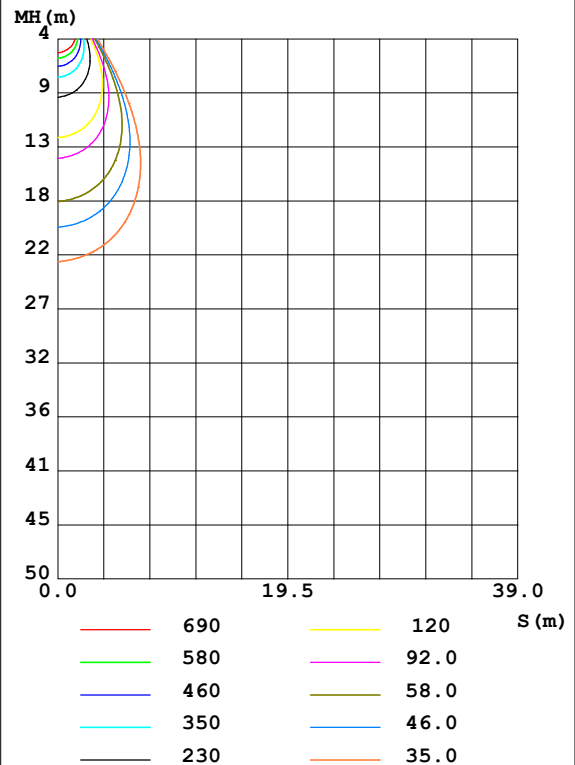

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1712	1743	1809	1800	1836	1825	1813	1759	0- 10	1729	1729	8.64,8.64
20	1345	1526	1774	1629	1598	1704	1782	1578	10- 20	4837	6566	32.8,32.8
30	708.7	994.7	1372	1103	1010	1315	1474	1124	20- 30	6496	13062	65.2,65.2
40	123.9	283.5	564.9	315.7	259.6	475.7	675.6	360.8	30- 40	4592	17653	88.2,88.2
50	28.73	45.18	92.80	48.58	25.37	58.90	109.2	46.49	40- 50	1331	18985	94.8,94.8
60	18.46	21.00	26.20	21.50	10.82	13.74	18.23	12.22	50- 60	268.5	19253	96.1,96.1
70	12.04	13.40	15.30	13.58	6.417	7.353	8.992	6.695	60- 70	135.9	19389	96.8,96.8
80	8.231	8.800	9.421	8.965	3.479	3.763	3.860	3.423	70- 80	85.17	19474	97.2,97.2
90	6.685	7.112	7.518	7.112	2.160	2.289	2.366	2.148	80- 90	57.71	19532	97.5,97.5
100	6.842	7.326	7.697	7.132	1.738	1.858	1.968	1.820	90-100	49.38	19581	97.8,97.8
110	8.431	8.761	9.026	8.441	1.878	2.052	2.295	2.128	100-110	51.71	19633	98,98
120	10.85	10.81	10.81	10.45	2.755	3.106	3.550	3.309	110-120	60.58	19694	98.3,98.3
130	13.24	12.75	12.43	12.48	4.538	4.990	5.564	5.327	120-130	70.92	19764	98.7,98.7
140	14.78	14.05	13.56	13.99	7.056	7.396	7.823	7.753	130-140	76.30	19841	99.1,99.1
150	15.23	14.67	14.39	14.87	9.667	9.719	9.694	9.825	140-150	72.55	19913	99.4,99.4
160	14.99	15.07	15.14	15.24	11.69	11.58	11.26	11.34	150-160	59.02	19972	99.7,99.7
170	15.01	15.54	15.74	15.35	13.36	13.44	13.34	13.17	160-170	39.05	20011	99.9,99.9
180	14.59	15.04	15.10	14.73	14.66	14.99	15.15	14.70	170-180	13.95	20025	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 18594 lm

%lum = 92.9%

%lamp = 92.9%

Conical surface Flux(120deg): 19253 lm

%lum = 96.1%


%lamp = 96.1%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.850m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:218.62V I:0.7084A P:150.04W PF:0.9688 Freq:50.08Hz Lamp Flux:20025.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

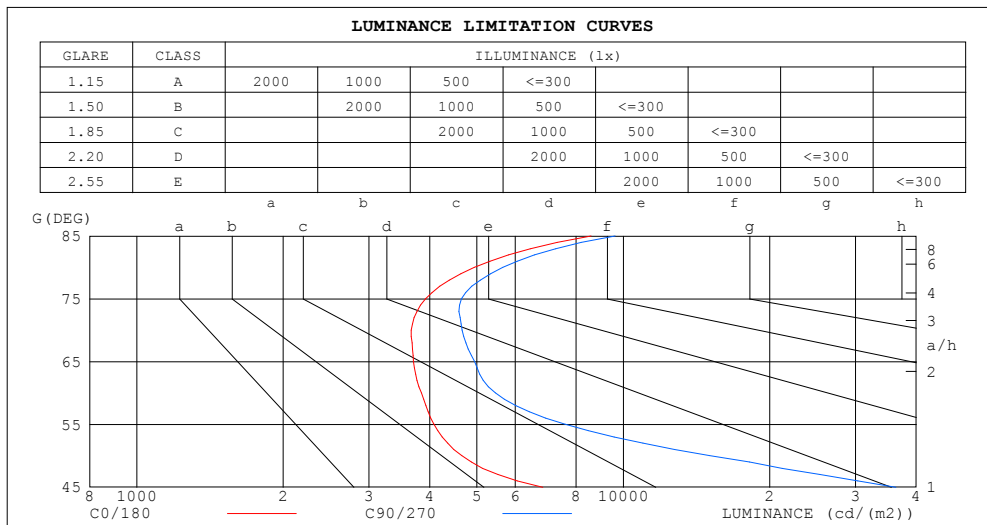

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8583	9614
80	4938	5651
75	3924	4652
70	3666	4661
65	3705	4950
60	3847	5458
55	4079	7597
50	4655	15038
45	6830	36309


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:218.62V I:0.7084A P:150.04W PF:0.9688 Freq:50.08Hz Lamp Flux:20025.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.10	1.07	1.05	1.07	1.05	1.03	1.03	1.01	.99	.98	.97	.96	.95	.94	.92	.90
2.0	1.01	.97	.94	.99	.96	.92	.96	.93	.90	.92	.90	.88	.89	.87	.85	.84
3.0	.94	.89	.85	.92	.88	.84	.89	.85	.82	.87	.83	.81	.84	.81	.79	.77
4.0	.87	.82	.77	.86	.81	.77	.84	.79	.75	.81	.77	.74	.79	.76	.73	.72
5.0	.81	.75	.71	.80	.75	.70	.78	.73	.70	.76	.72	.69	.75	.71	.68	.66
6.0	.76	.70	.65	.75	.69	.65	.73	.68	.64	.72	.67	.64	.70	.66	.63	.62
7.0	.71	.65	.61	.70	.65	.60	.69	.64	.60	.67	.63	.59	.66	.62	.59	.57
8.0	.67	.61	.56	.66	.60	.56	.65	.59	.56	.64	.59	.55	.62	.58	.55	.53
9.0	.63	.57	.53	.62	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.51	.50
10.0	.59	.53	.49	.59	.53	.49	.58	.52	.49	.57	.52	.48	.56	.51	.48	.47

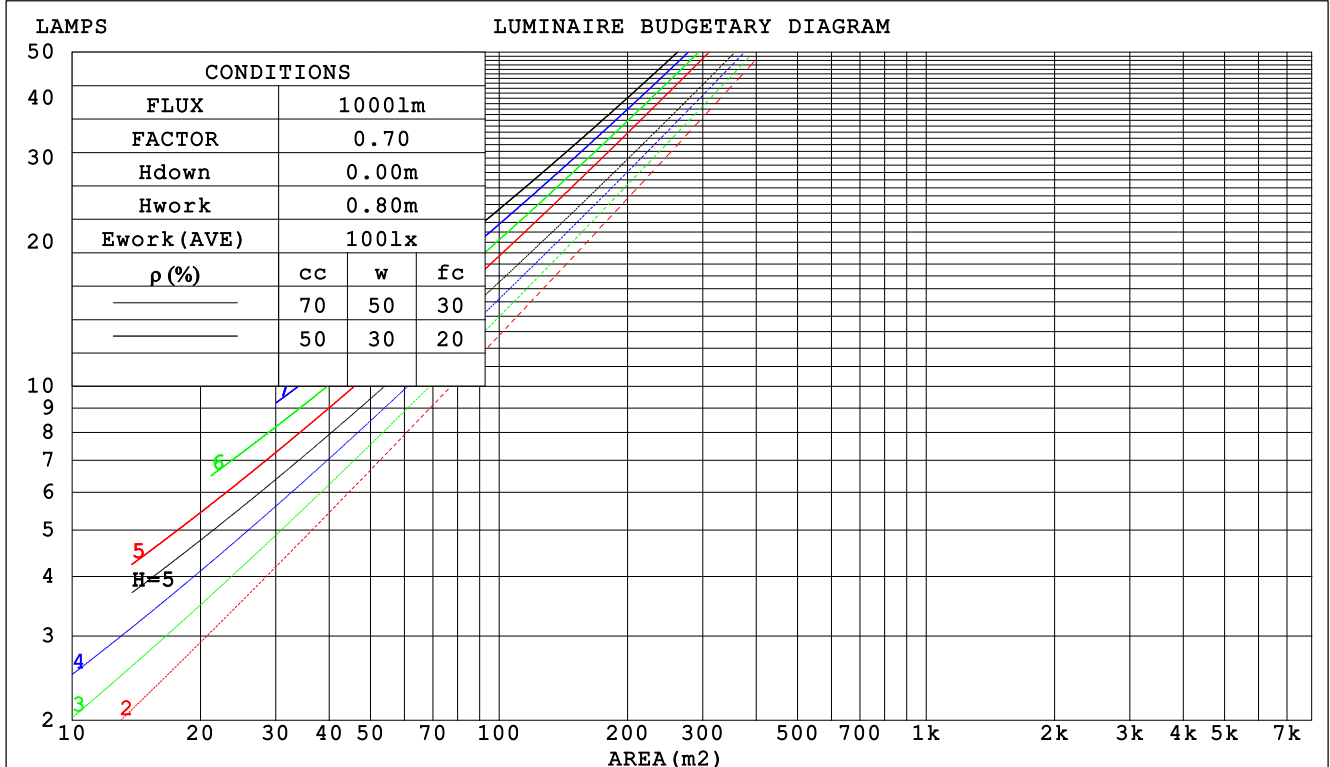

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:218.62V I:0.7084A P:150.04W PF:0.9688 Freq:50.08Hz Lamp Flux:20025.3x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.: EVERFINE		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.190	.108	.034	.182	.104	.033	.168	.096	.031	.155	.090	.029	.143	.083	.027	
2.0	.181	.099	.030	.175	.096	.030	.163	.090	.028	.151	.085	.027	.141	.080	.025	
3.0	.172	.092	.027	.166	.089	.027	.156	.085	.026	.147	.080	.025	.138	.076	.024	
4.0	.164	.085	.025	.159	.083	.025	.150	.079	.024	.141	.076	.023	.133	.073	.022	
5.0	.156	.079	.023	.151	.078	.023	.143	.075	.022	.136	.072	.021	.129	.069	.021	
6.0	.148	.074	.021	.145	.073	.021	.138	.071	.021	.131	.068	.020	.125	.066	.019	
7.0	.142	.070	.020	.138	.069	.020	.132	.067	.019	.126	.065	.019	.120	.063	.018	
8.0	.135	.066	.019	.132	.065	.018	.127	.063	.018	.121	.061	.018	.116	.060	.017	
9.0	.130	.063	.018	.127	.062	.017	.122	.060	.017	.117	.059	.017	.112	.057	.016	
10.0	.124	.060	.017	.122	.059	.016	.117	.057	.016	.113	.056	.016	.108	.055	.016	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.191	.176	.163	.163	.151	.140	.112	.104	.097	.064	.060	.056	.021	.019	.018	
2.0	.177	.152	.130	.151	.130	.113	.104	.090	.079	.060	.052	.046	.019	.017	.015	
3.0	.165	.133	.107	.141	.115	.093	.097	.080	.065	.056	.046	.038	.018	.015	.013	
4.0	.155	.118	.090	.133	.102	.078	.091	.071	.055	.053	.042	.033	.017	.014	.011	
5.0	.147	.107	.078	.126	.093	.067	.087	.065	.048	.050	.038	.028	.016	.012	.009	
6.0	.140	.098	.068	.120	.085	.059	.083	.059	.042	.048	.035	.025	.015	.011	.008	
7.0	.133	.090	.060	.115	.078	.053	.079	.055	.037	.046	.032	.022	.015	.011	.007	
8.0	.128	.084	.055	.110	.073	.048	.076	.051	.034	.044	.030	.020	.014	.010	.007	
9.0	.123	.079	.050	.106	.069	.044	.073	.048	.031	.043	.029	.018	.014	.009	.006	
10.0	.118	.075	.046	.102	.065	.040	.071	.046	.029	.041	.027	.017	.013	.009	.006	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:218.62V I:0.7084A P:150.04W PF:0.9688 Freq:50.08Hz Lamp Flux:20025.3x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: EVERFINE					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	16.5	17.5	16.8	17.7	17.9	20.6	21.6	20.9	21.8	22.0
	3H	16.5	17.4	16.8	17.7	17.9	20.5	21.4	20.8	21.7	21.9
	4H	16.6	17.4	16.9	17.7	18.0	20.5	21.3	20.8	21.6	21.9
	6H	16.7	17.5	17.0	17.8	18.1	20.5	21.3	20.8	21.6	21.9
	8H	16.8	17.5	17.1	17.8	18.1	20.5	21.3	20.8	21.6	21.9
	12H	16.9	17.6	17.3	18.0	18.3	20.5	21.3	20.9	21.6	21.9
4H	2H	16.4	17.2	16.7	17.5	17.7	20.4	21.2	20.7	21.5	21.8
	3H	16.5	17.2	16.8	17.5	17.8	20.3	21.0	20.7	21.4	21.7
	4H	16.6	17.3	17.0	17.6	18.0	20.3	21.0	20.7	21.3	21.7
	6H	16.8	17.4	17.2	17.8	18.2	20.4	20.9	20.8	21.3	21.7
	8H	17.0	17.5	17.4	17.9	18.4	20.4	20.9	20.8	21.3	21.8
	12H	17.3	17.8	17.7	18.2	18.6	20.5	21.0	21.0	21.4	21.9
8H	4H	16.6	17.1	17.0	17.5	18.0	20.2	20.7	20.6	21.1	21.6
	6H	17.0	17.4	17.4	17.8	18.3	20.3	20.8	20.8	21.2	21.7
	8H	17.3	17.6	17.7	18.1	18.6	20.4	20.8	20.9	21.3	21.8
	12H	17.7	18.0	18.2	18.5	19.0	20.6	20.9	21.1	21.4	21.9
12H	4H	16.6	17.1	17.0	17.5	17.9	20.2	20.7	20.6	21.1	21.5
	6H	17.0	17.4	17.5	17.9	18.4	20.3	20.7	20.8	21.1	21.6
	8H	17.4	17.7	17.9	18.2	18.7	20.4	20.8	20.9	21.2	21.8
Variations with the observer position at spacings:											
S = 1.0H	+ 1.6 / - 2.1					+ 3.7 / - 5.2					
1.5H	+ 3.2 / - 2.1					+ 5.9 / - 5.4					
2.0H	+ 0.9 / - 0.4					+ 5.8 / - 2.1					

CIE Pub.117, 20025 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 10.4)
Area: 0.096 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:218.62V I:0.7084A P:150.04W PF:0.9688 Freq:50.08Hz Lamp Flux:20025.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	86	82	91	85	81	90	84	81	77
1.00	97	91	87	96	90	86	94	90	86	81
1.25	101	95	92	100	95	91	98	93	90	85
1.50	104	99	95	102	98	95	100	96	93	88
2.00	107	102	99	105	101	98	102	99	96	90
2.50	109	105	101	107	103	100	103	100	98	91
3.00	110	107	104	108	105	102	105	102	100	93
4.00	113	109	107	110	108	105	106	104	102	94
5.00	114	111	109	111	109	107	107	105	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.62V I:0.7084A P:150.04W PF:0.9688 Freq:50.08Hz Lamp Flux:20025.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

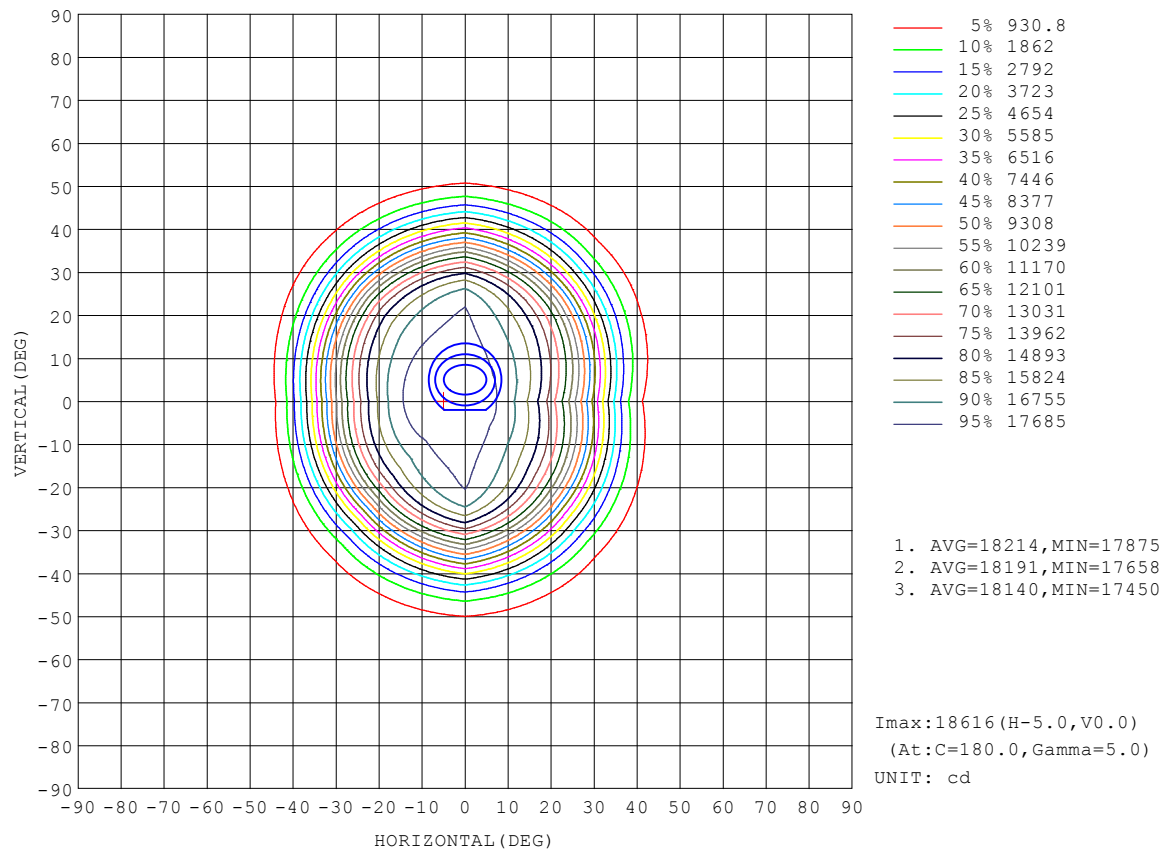


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.62V I:0.7084A P:150.04W PF:0.9688 Freq:50.08Hz Lamp Flux:20025.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Flux out:12428 lm

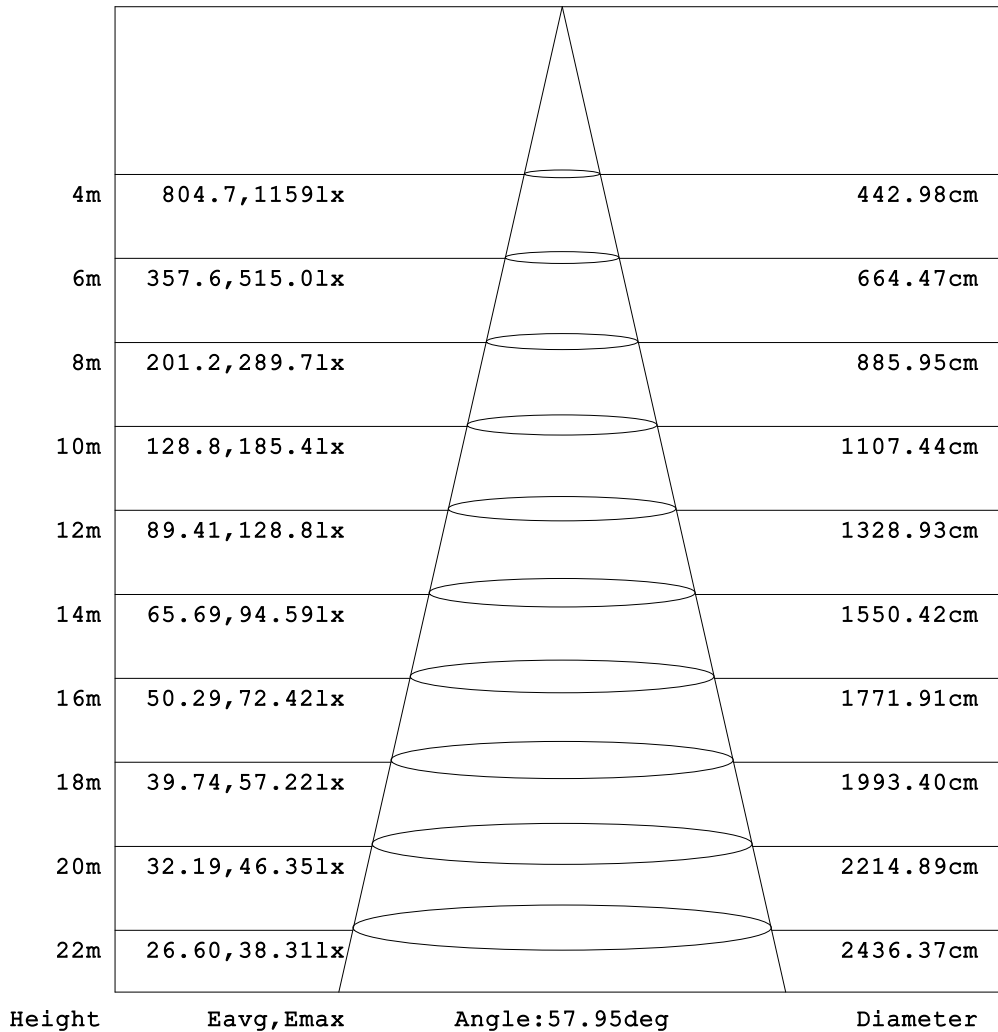


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.850m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:218.62V I:0.7084A P:150.04W PF:0.9688 Freq:50.08Hz Lamp Flux:20025.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

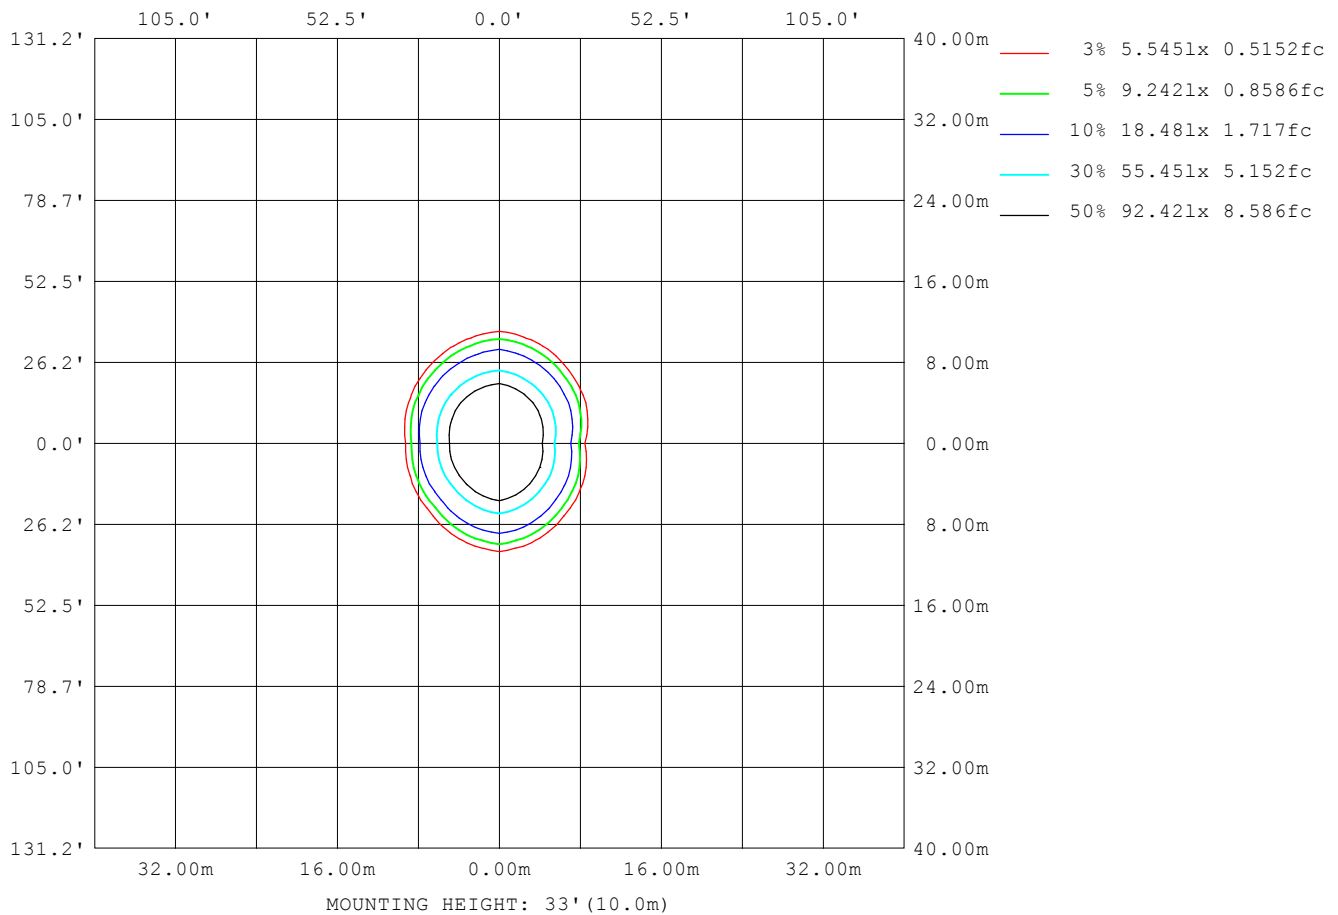

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:218.62V I:0.7084A P:150.04W PF:0.9688 Freq:50.08Hz Lamp Flux:20025.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2875
L_0~180 (75) av	2898
L_0~180 (85) av	5891
L_90~270 (65) av	3957
L_90~270 (75) av	3517
L_90~270 (85) av	6547
L_45 (65) av	3272
L_45 (75) av	3159
L_45 (85) av	6206

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

Planar Illuminance Curve

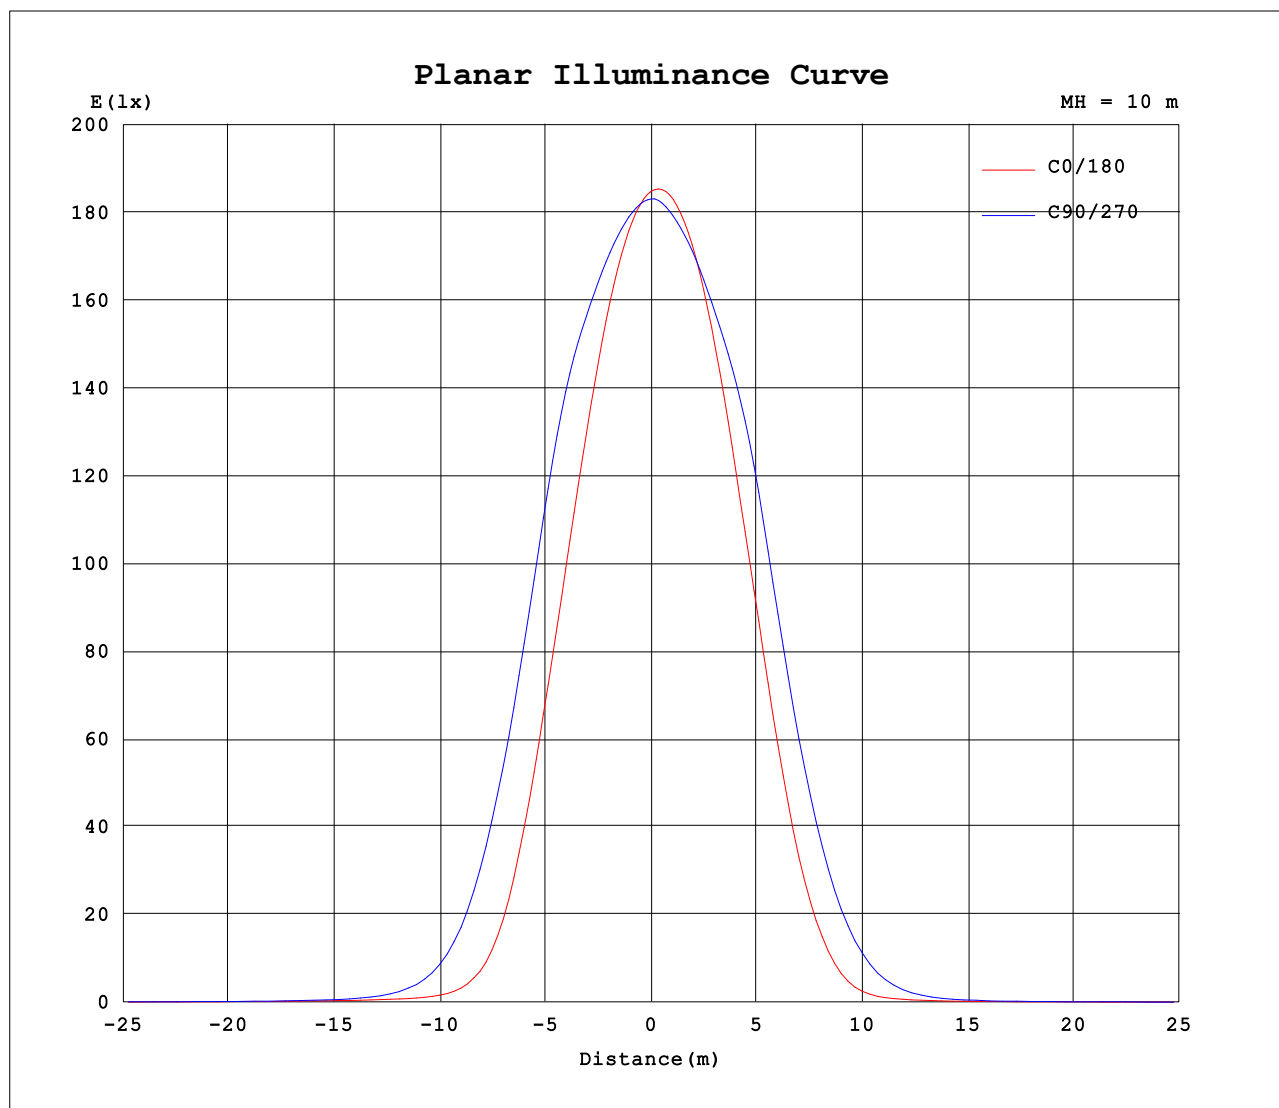

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.62V I:0.7084A P:150.04W PF:0.9688 Freq:50.08Hz Lamp Flux:20025.3x1 lm									
NAME:					TYPE:			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.: EVERFINE					SUR.:			Shielding Angle:	

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1848	1837	1831	1829	1848	1837	1831	1829										
5	1802	1802	1822	1829	1862	1844	1824	1804										
10	1712	1743	1809	1800	1836	1825	1813	1759										
15	1563	1656	1796	1737	1755	1780	1800	1689										
20	1345	1526	1774	1629	1598	1704	1782	1578										
25	1061	1320	1658	1437	1353	1571	1716	1403										
30	709	995	1372	1103	1010	1315	1474	1124										
35	346	597	980	668	603	904	1095	726										
40	124	284	565	316	260	476	676	361										
45	46.4	107	246	120	71.2	185	318	139										
50	28.7	45.2	92.8	48.6	25.4	58.9	109	46.5										
55	22.5	27.5	41.8	28.4	14.8	23.1	37.6	19.6										
60	18.5	21.0	26.2	21.5	10.8	13.7	18.2	12.2										
65	15.0	17.0	20.1	17.3	8.30	9.87	12.0	9.01										
70	12.0	13.4	15.3	13.6	6.42	7.35	8.99	6.70										
75	9.75	10.6	11.6	10.8	4.65	5.21	5.92	4.74										
80	8.23	8.80	9.42	8.97	3.48	3.76	3.86	3.42										
85	7.18	7.61	8.04	7.70	2.68	2.85	2.91	2.61										
90	6.69	7.11	7.52	7.11	2.16	2.29	2.37	2.15										
95	6.56	7.03	7.42	6.93	1.88	2.01	2.10	1.92										
100	6.84	7.33	7.70	7.13	1.74	1.86	1.97	1.82										
105	7.49	7.92	8.27	7.66	1.74	1.86	2.02	1.88										
110	8.43	8.76	9.03	8.44	1.88	2.05	2.29	2.13										
115	9.58	9.75	9.90	9.40	2.21	2.46	2.81	2.60										
120	10.8	10.8	10.8	10.5	2.75	3.11	3.55	3.31										
125	12.1	11.9	11.7	11.5	3.54	3.96	4.49	4.23										
130	13.2	12.8	12.4	12.5	4.54	4.99	5.56	5.33										
135	14.1	13.5	13.1	13.3	5.73	6.16	6.71	6.54										
140	14.8	14.0	13.6	14.0	7.06	7.40	7.82	7.75										
145	15.1	14.4	14.0	14.5	8.43	8.63	8.85	8.91										
150	15.2	14.7	14.4	14.9	9.67	9.72	9.69	9.82										
155	15.1	14.9	14.8	15.1	10.8	10.7	10.4	10.6										
160	15.0	15.1	15.1	15.2	11.7	11.6	11.3	11.3										
165	14.9	15.3	15.5	15.3	12.6	12.5	12.3	12.3										
170	15.0	15.5	15.7	15.4	13.4	13.4	13.3	13.2										
175	14.9	15.5	15.6	15.2	14.1	14.3	14.3	14.0										
180	14.6	15.0	15.1	14.7	14.7	15.0	15.1	14.7										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks: