


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:218.63V I:0.7083A P:150.01W PF:0.9688 Freq:50.09Hz Lamp Flux:20151.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 134.33 lm/W			
MODEL		I _{max} (cd)	14303	S/MH (C0/180)	1.15
NOMINAL POWER (W)	150	LOR (%)	100.0	S/MH (C90/270)	1.11
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	20151	η UP, DN (C0-180)	1.7, 46.6
NOMINAL FLUX (lm)	20151.1	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 51.0
LAMPS INSIDE	1	η up (%)	2.5	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	220	η down (%)	97.5	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

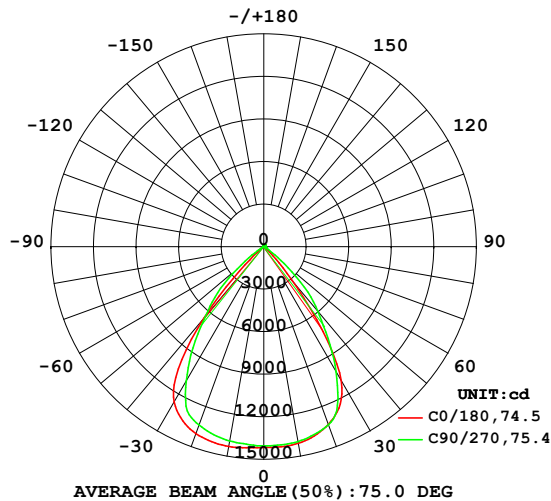

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

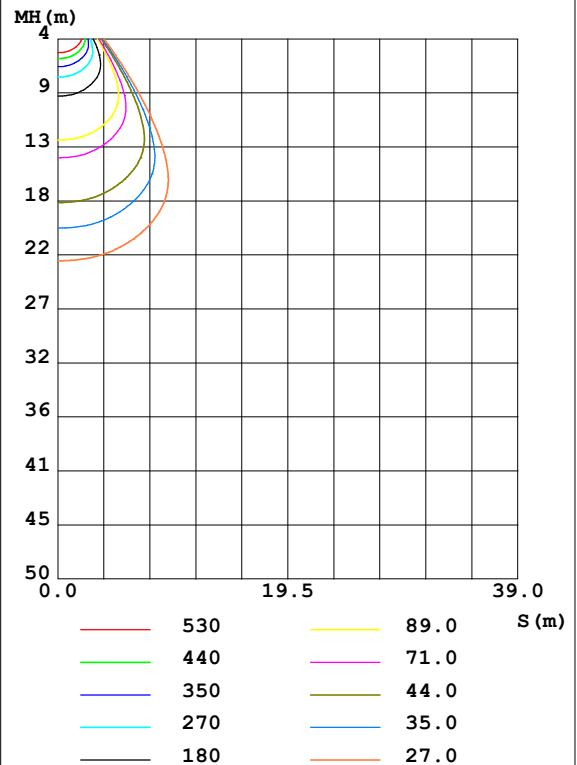

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1408	1396	1395	1406	1430	1407	1391	1385	0- 10	1342	1342	6.66, 6.66
20	1333	1320	1336	1344	1402	1356	1337	1326	10- 20	3901	5243	26, 26
30	1094	1113	1022	1179	1265	1218	1094	1170	20- 30	5834	11077	55, 55
40	314.4	508.0	591.7	563.2	654.2	695.4	639.4	590.2	30- 40	5430	16507	81.9, 81.9
50	32.29	86.38	189.5	101.2	47.92	163.6	245.8	113.2	40- 50	2426	18933	94, 94
60	18.41	20.65	24.97	21.29	11.46	17.06	21.67	13.57	50- 60	448.7	19382	96.2, 96.2
70	12.12	12.92	13.35	13.21	5.416	6.014	6.119	5.404	60- 70	125.4	19507	96.8, 96.8
80	8.809	9.319	9.753	9.481	3.728	3.856	3.781	3.553	70- 80	82.52	19590	97.2, 97.2
90	7.456	7.758	8.003	7.715	2.495	2.507	2.501	2.411	80- 90	61.61	19651	97.5, 97.5
100	7.939	8.020	8.117	7.849	2.085	2.163	2.257	2.150	90-100	54.73	19706	97.8, 97.8
110	9.336	9.255	9.269	9.020	2.282	2.476	2.676	2.557	100-110	57.13	19763	98.1, 98.1
120	11.08	10.88	10.76	10.62	3.433	3.633	3.863	3.810	110-120	64.65	19828	98.4, 98.4
130	12.42	12.29	12.19	12.09	5.270	5.459	5.710	5.636	120-130	72.27	19900	98.8, 98.8
140	13.33	13.26	13.22	13.19	7.349	7.503	7.562	7.506	130-140	74.54	19975	99.1, 99.1
150	14.08	14.12	14.11	13.97	8.992	9.112	9.147	9.031	140-150	68.88	20044	99.5, 99.5
160	15.00	14.96	14.88	14.79	10.41	10.64	10.83	10.66	150-160	56.06	20100	99.7, 99.7
170	15.43	15.35	15.32	15.31	12.48	12.66	12.84	12.71	160-170	37.86	20138	99.9, 99.9
180	14.39	14.49	14.58	14.50	14.46	14.44	14.63	14.47	170-180	13.60	20151	100, 100
DEG	LUMINOUS INTENSITY: $\times 10\text{cd}$									UNIT: lm		

Conical surface Flux(90deg): 18105 lm

%lum = 89.8%

%lamp = 89.8%

Conical surface Flux(120deg): 19382 lm

%lum = 96.2%


%lamp = 96.2%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.850m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:218.63V I:0.7083A P:150.01W PF:0.9688 Freq:50.09Hz Lamp Flux:20151.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

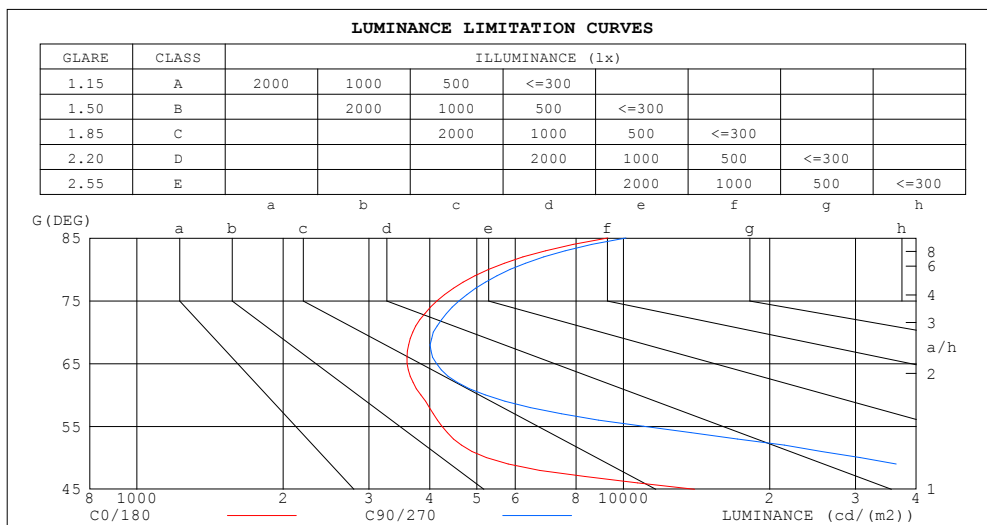

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9293	10132
80	5284	5851
75	4142	4598
70	3691	4066
65	3591	4131
60	3835	5202
55	4238	10988
50	5233	30705
45	14012	59752


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:218.63V I:0.7083A P:150.01W PF:0.9688 Freq:50.09Hz Lamp Flux:20151.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.09	1.06	1.04	1.07	1.04	1.02	1.02	1.00	.98	.98	.96	.95	.94	.93	.92	.90
2.0	1.00	.96	.92	.98	.94	.91	.95	.91	.88	.91	.88	.86	.88	.86	.84	.82
3.0	.92	.87	.82	.91	.85	.81	.88	.83	.80	.85	.81	.78	.82	.79	.77	.75
4.0	.85	.79	.74	.84	.78	.74	.81	.76	.72	.79	.75	.71	.77	.73	.70	.68
5.0	.79	.72	.67	.77	.71	.67	.75	.70	.66	.73	.69	.65	.71	.68	.64	.63
6.0	.73	.66	.61	.72	.66	.61	.70	.64	.60	.68	.63	.60	.67	.62	.59	.57
7.0	.68	.61	.56	.67	.60	.56	.65	.60	.55	.64	.59	.55	.62	.58	.55	.53
8.0	.63	.56	.52	.62	.56	.52	.61	.55	.51	.60	.54	.51	.58	.54	.50	.49
9.0	.59	.52	.48	.58	.52	.48	.57	.51	.47	.56	.51	.47	.55	.50	.47	.45
10.0	.55	.49	.44	.54	.48	.44	.53	.48	.44	.52	.47	.44	.51	.47	.43	.42

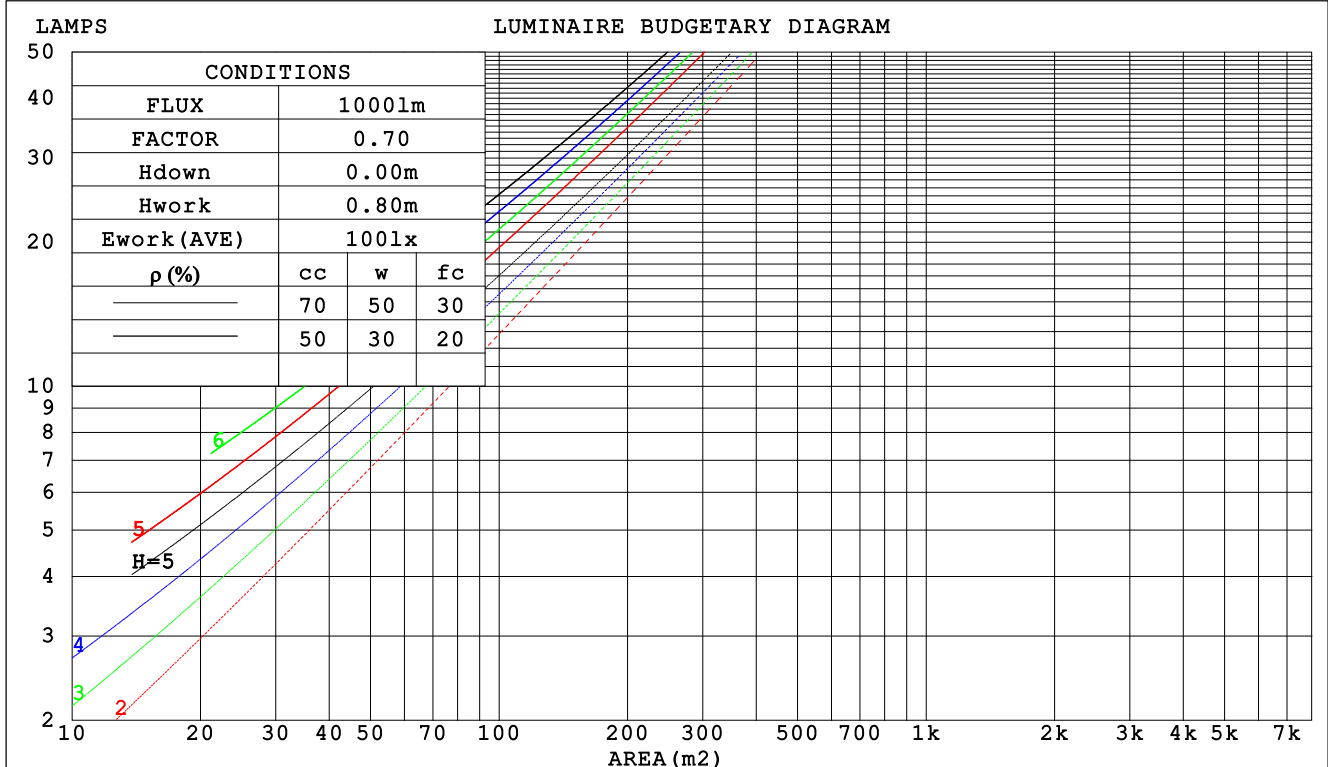

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:218.63V I:0.7083A P:150.01W PF:0.9688 Freq:50.09Hz Lamp Flux:20151.1x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.: EVERFINE		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.200	.114	.036	.193	.110	.035	.179	.102	.033	.166	.095	.031	.154	.089	.029	
2.0	.192	.105	.032	.186	.102	.032	.174	.097	.030	.163	.091	.029	.152	.086	.027	
3.0	.184	.098	.029	.178	.095	.029	.168	.091	.028	.158	.086	.027	.149	.082	.025	
4.0	.175	.091	.027	.170	.089	.026	.161	.085	.025	.152	.082	.025	.144	.078	.024	
5.0	.167	.085	.025	.162	.083	.024	.154	.080	.024	.147	.077	.023	.140	.075	.022	
6.0	.159	.080	.023	.155	.078	.023	.148	.076	.022	.141	.073	.022	.135	.071	.021	
7.0	.152	.075	.021	.148	.074	.021	.142	.072	.021	.136	.069	.020	.130	.067	.020	
8.0	.145	.071	.020	.142	.070	.020	.136	.068	.019	.130	.066	.019	.125	.064	.019	
9.0	.138	.067	.019	.136	.066	.019	.130	.064	.018	.125	.063	.018	.120	.061	.018	
10.0	.132	.064	.018	.130	.063	.018	.125	.061	.017	.120	.060	.017	.116	.058	.017	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.192	.176	.162	.164	.151	.140	.112	.104	.096	.065	.060	.056	.021	.019	.018	
2.0	.178	.152	.129	.153	.130	.112	.105	.090	.078	.060	.053	.046	.019	.017	.015	
3.0	.167	.133	.106	.143	.115	.092	.098	.080	.064	.057	.047	.038	.018	.015	.012	
4.0	.158	.119	.089	.136	.103	.077	.093	.071	.054	.054	.042	.032	.017	.014	.011	
5.0	.150	.107	.076	.129	.093	.066	.089	.065	.047	.051	.038	.028	.017	.012	.009	
6.0	.143	.099	.066	.123	.085	.058	.085	.060	.041	.049	.035	.024	.016	.011	.008	
7.0	.137	.091	.059	.118	.079	.052	.082	.055	.037	.047	.033	.022	.015	.011	.007	
8.0	.132	.085	.053	.113	.074	.047	.078	.052	.033	.046	.031	.020	.015	.010	.007	
9.0	.127	.080	.049	.109	.070	.043	.076	.049	.030	.044	.029	.018	.014	.009	.006	
10.0	.122	.076	.045	.105	.066	.040	.073	.046	.028	.043	.027	.017	.014	.009	.006	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.850m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:218.63V I:0.7083A P:150.01W PF:0.9688 Freq:50.09Hz Lamp Flux:20151.1x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: EVERFINE					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	20.1	21.2	20.4	21.4	21.6	21.7	22.8	22.0	23.0	23.2
	3H	20.0	21.0	20.3	21.2	21.5	21.6	22.6	21.9	22.8	23.1
	4H	20.0	20.9	20.3	21.1	21.4	21.5	22.5	21.9	22.7	23.0
	6H	19.9	20.8	20.3	21.1	21.4	21.5	22.4	21.8	22.6	22.9
	8H	20.0	20.8	20.3	21.1	21.4	21.5	22.3	21.9	22.6	22.9
	12H	20.0	20.8	20.4	21.1	21.4	21.5	22.3	21.9	22.6	23.0
4H	2H	19.9	20.8	20.2	21.1	21.3	21.5	22.4	21.8	22.6	22.9
	3H	19.8	20.6	20.2	20.9	21.2	21.3	22.1	21.7	22.4	22.8
	4H	19.8	20.5	20.2	20.8	21.2	21.3	22.0	21.7	22.4	22.7
	6H	19.8	20.5	20.3	20.8	21.2	21.3	22.0	21.8	22.3	22.7
	8H	19.9	20.5	20.3	20.9	21.3	21.4	21.9	21.8	22.3	22.8
	12H	20.0	20.5	20.5	20.9	21.4	21.4	22.0	21.9	22.4	22.8
8H	4H	19.7	20.3	20.1	20.7	21.1	21.2	21.8	21.6	22.2	22.6
	6H	19.8	20.3	20.3	20.7	21.2	21.3	21.7	21.7	22.2	22.6
	8H	19.9	20.4	20.4	20.8	21.3	21.4	21.8	21.8	22.2	22.7
	12H	20.2	20.5	20.7	21.0	21.5	21.5	21.9	22.0	22.3	22.9
12H	4H	19.7	20.2	20.1	20.6	21.1	21.2	21.7	21.6	22.1	22.6
	6H	19.8	20.2	20.3	20.7	21.2	21.2	21.7	21.7	22.1	22.6
	8H	20.0	20.3	20.5	20.8	21.3	21.4	21.7	21.9	22.2	22.7
Variations with the observer position at spacings:											
S = 1.0H	+ 2.1 / - 5.1					+ 2.2 / - 5.6					
1.5H	+ 4.3 / - 5.2					+ 3.4 / - 6.4					
2.0H	+ 3.0 / - 1.1					+ 6.6 / - 4.4					

CIE Pub.117, 20151 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 10.4$)
Area: 0.096 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:218.63V I:0.7083A P:150.01W PF:0.9688 Freq:50.09Hz Lamp Flux:20151.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	80	73	68	79	72	68	78	72	68	64
0.80	89	82	77	88	81	77	86	80	76	72
1.00	94	88	83	93	87	83	91	87	82	78
1.25	99	93	89	98	92	88	95	91	87	82
1.50	102	97	93	101	96	92	98	94	91	85
2.00	106	101	97	104	100	96	101	97	95	88
2.50	108	103	100	106	102	99	102	99	97	90
3.00	110	106	102	108	104	101	104	101	99	91
4.00	112	109	106	109	107	104	105	103	101	93
5.00	113	110	108	111	108	106	106	104	103	94
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.63V I:0.7083A P:150.01W PF:0.9688 Freq:50.09Hz Lamp Flux:20151.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

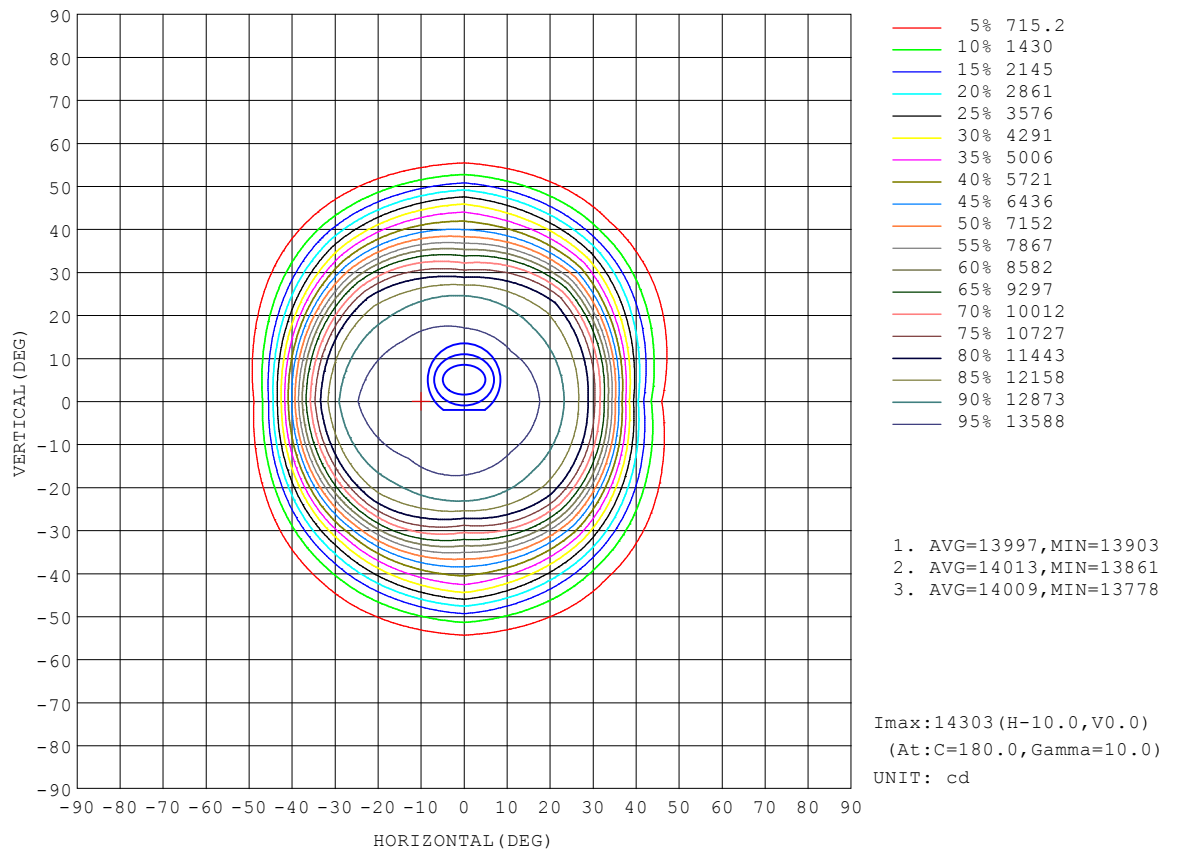


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.63V I:0.7083A P:150.01W PF:0.9688 Freq:50.09Hz Lamp Flux:20151.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

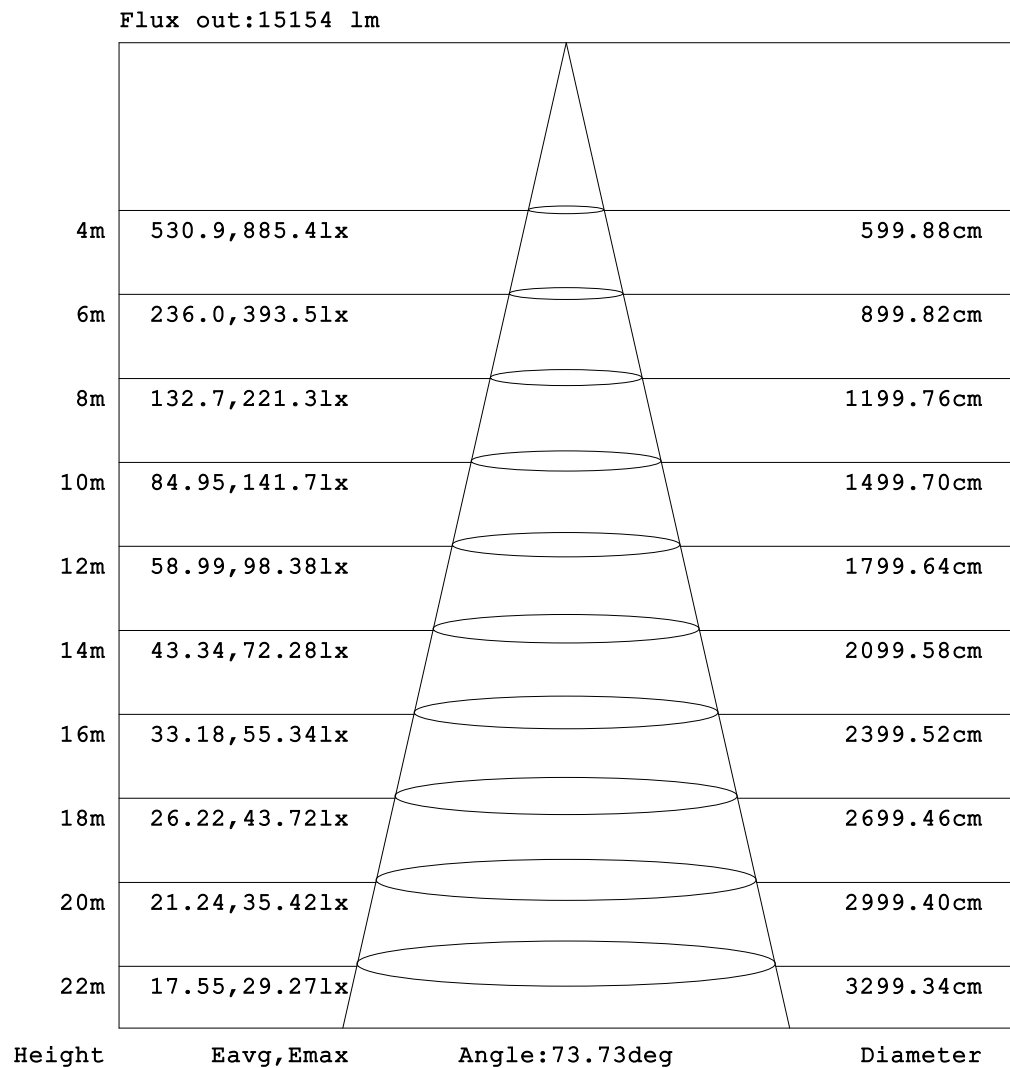


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.850m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:218.63V I:0.7083A P:150.01W PF:0.9688 Freq:50.09Hz Lamp Flux:20151.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

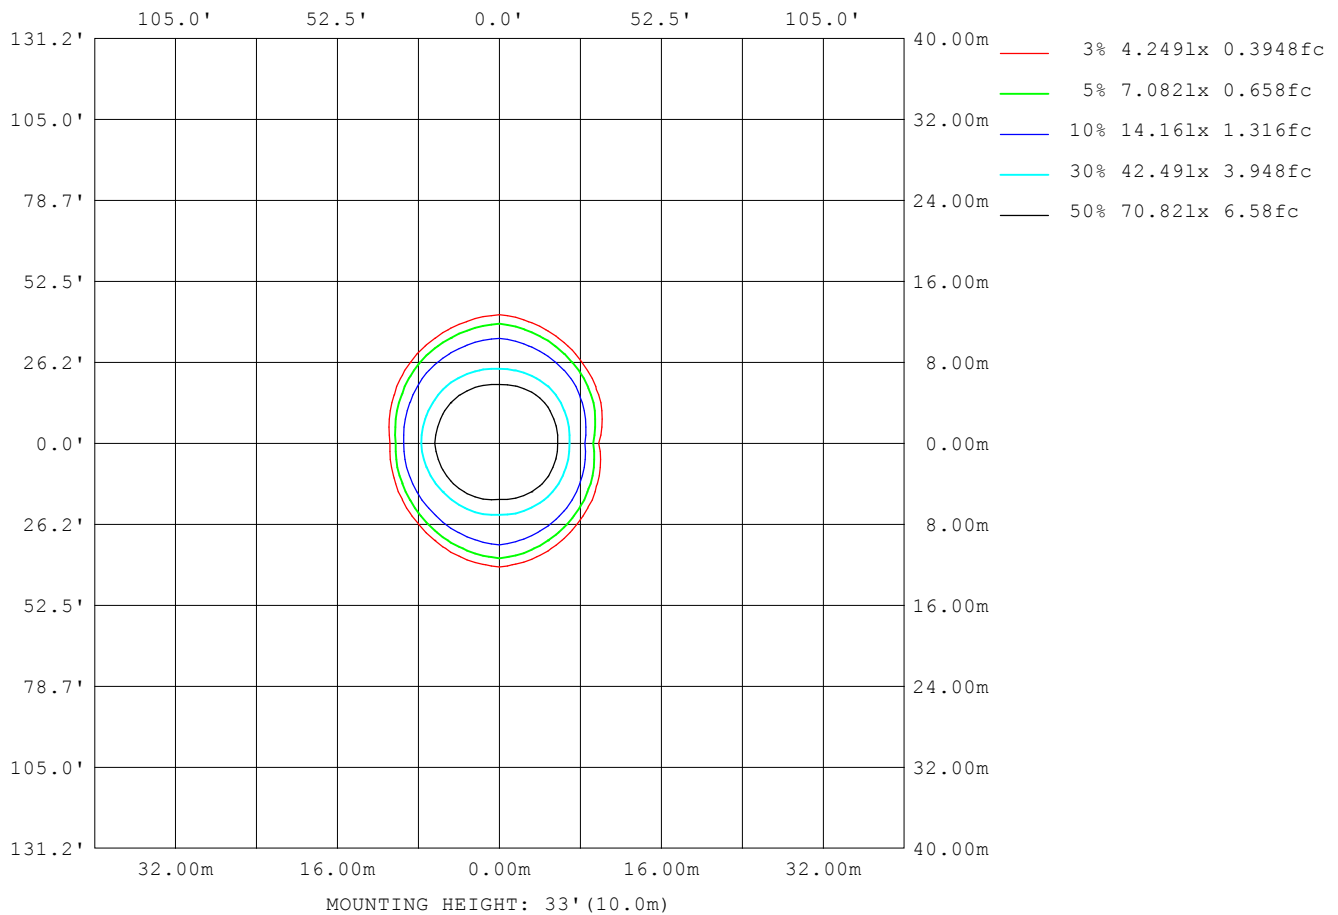

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.850m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:218.63V I:0.7083A P:150.01W PF:0.9688 Freq:50.09Hz Lamp Flux:20151.1x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2704
L_0~180 (75) av	2964
L_0~180 (85) av	6430
L_90~270 (65) av	3261
L_90~270 (75) av	3240
L_90~270 (85) av	6827
L_45 (65) av	2959
L_45 (75) av	3145
L_45 (85) av	6640

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks:

Planar Illuminance Curve

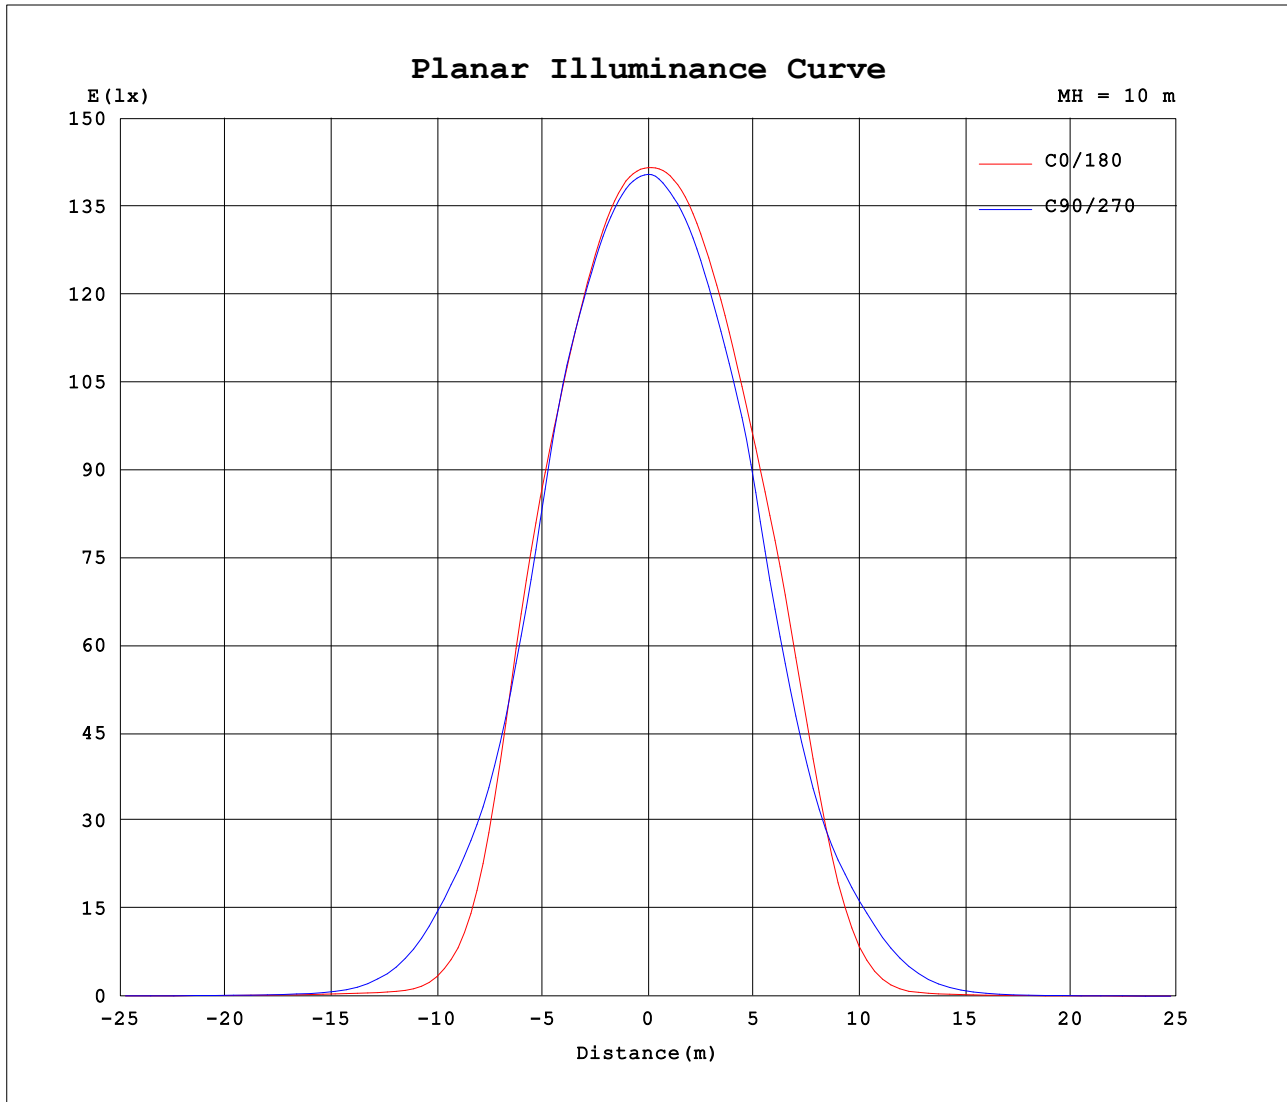

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.850m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.63V I:0.7083A P:150.01W PF:0.9688 Freq:50.09Hz Lamp Flux:20151.1x1 lm								
NAME:				TYPE:				WEIGHT:
SPEC.:				DIM.:				SERIAL No.:
MFR.: EVERFINE				SUR.:				Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1416	1409	1405	1403	1416	1409	1405	1403										
5	1417	1407	1404	1408	1424	1410	1398	1394										
10	1408	1396	1395	1406	1430	1407	1391	1385										
15	1381	1367	1373	1386	1424	1391	1372	1364										
20	1333	1320	1336	1344	1402	1356	1337	1326										
25	1255	1250	1232	1288	1354	1302	1279	1264										
30	1094	1113	1022	1179	1265	1218	1094	1170										
35	730	819	791	898	1053	1017	872	921										
40	314	508	592	563	654	695	639	590										
45	95.1	241	406	292	241	402	462	315										
50	32.3	86.4	189	101	47.9	164	246	113										
55	23.3	34.0	60.5	35.2	17.9	46.4	79.4	30.7										
60	18.4	20.7	25.0	21.3	11.5	17.1	21.7	13.6										
65	14.6	15.6	16.8	16.0	7.38	8.78	9.70	7.62										
70	12.1	12.9	13.4	13.2	5.42	6.01	6.12	5.40										
75	10.3	11.0	11.4	11.2	4.44	4.75	4.68	4.35										
80	8.81	9.32	9.75	9.48	3.73	3.86	3.78	3.55										
85	7.78	8.17	8.48	8.22	2.98	3.02	2.95	2.82										
90	7.46	7.76	8.00	7.71	2.50	2.51	2.50	2.41										
95	7.54	7.73	7.89	7.62	2.24	2.28	2.31	2.22										
100	7.94	8.02	8.12	7.85	2.08	2.16	2.26	2.15										
105	8.56	8.55	8.60	8.34	2.08	2.21	2.38	2.25										
110	9.34	9.25	9.27	9.02	2.28	2.48	2.68	2.56										
115	10.2	10.1	10.0	9.81	2.75	2.95	3.17	3.08										
120	11.1	10.9	10.8	10.6	3.43	3.63	3.86	3.81										
125	11.8	11.6	11.5	11.4	4.29	4.48	4.75	4.68										
130	12.4	12.3	12.2	12.1	5.27	5.46	5.71	5.64										
135	12.9	12.8	12.8	12.7	6.32	6.51	6.66	6.60										
140	13.3	13.3	13.2	13.2	7.35	7.50	7.56	7.51										
145	13.7	13.7	13.7	13.6	8.27	8.39	8.40	8.33										
150	14.1	14.1	14.1	14.0	8.99	9.11	9.15	9.03										
155	14.5	14.6	14.5	14.4	9.63	9.81	9.93	9.78										
160	15.0	15.0	14.9	14.8	10.4	10.6	10.8	10.7										
165	15.3	15.2	15.2	15.1	11.4	11.7	11.8	11.7										
170	15.4	15.3	15.3	15.3	12.5	12.7	12.8	12.7										
175	15.1	15.1	15.1	15.1	13.5	13.6	13.8	13.7										
180	14.4	14.5	14.6	14.5	14.5	14.4	14.6	14.5										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.850m [K=1.0000]
Remarks: