


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz Lamp Flux:33570.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 168.68 lm/W			
MODEL		Imax(cd)	15968	S/MH(C0/180)	1.40
NOMINAL POWER(W)	200	LOR(%)	100.0	S/MH(C90/270)	1.00
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	33571	η UP,DN(C0-180)	1.2,54.6
NOMINAL FLUX(lm)	33570.6	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.2,43.0
LAMPS INSIDE	1	η up(%)	2.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.6	CIBSE SHR MAX	1.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

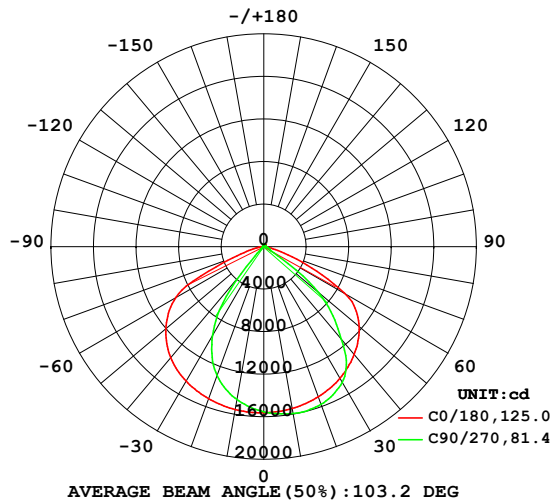

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

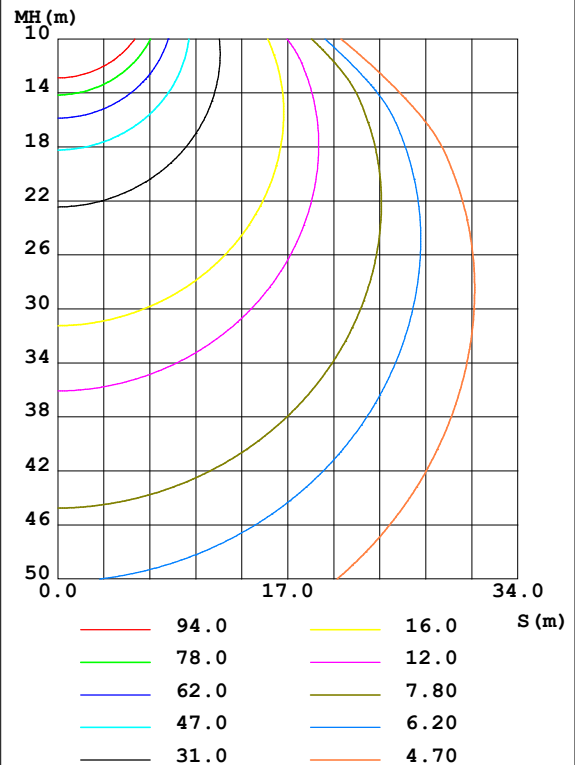

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1545	1581	1593	1584	1555	1482	1460	1546	0- 10	1482	1482	4.41,4.41
20	1502	1578	1578	1542	1521	1358	1289	1472	10- 20	4288	5770	17.2,17.2
30	1431	1522	1475	1429	1461	1137	964.8	1343	20- 30	6552	12321	36.7,36.7
40	1324	1369	1136	1138	1362	723.5	334.5	1116	30- 40	7652	19974	59.5,59.5
50	1171	855.3	673.2	555.3	1203	51.66	36.66	561.2	40- 50	6567	26540	79.1,79.1
60	877.7	82.16	78.22	69.18	953.6	27.86	20.44	41.15	50- 60	3673	30213	90,90
70	286.2	57.77	45.57	44.70	313.2	14.53	10.88	24.19	60- 70	1814	32027	95.4,95.4
80	39.49	26.91	20.90	18.32	70.75	7.213	6.150	11.14	70- 80	568.6	32596	97.1,97.1
90	13.88	12.68	12.08	9.909	9.834	6.473	6.097	8.275	80- 90	167.0	32763	97.6,97.6
100	11.90	9.568	7.556	8.405	7.968	7.357	7.255	8.657	90-100	96.67	32859	97.9,97.9
110	12.36	9.030	6.735	8.747	9.822	9.169	8.839	9.783	100-110	93.80	32953	98.2,98.2
120	14.25	10.78	7.706	9.844	12.54	10.99	10.76	12.80	110-120	101.2	33054	98.5,98.5
130	17.01	13.36	9.452	11.46	15.42	13.39	14.25	15.98	120-130	111.7	33166	98.8,98.8
140	19.18	16.52	11.71	13.77	18.03	15.72	17.33	18.37	130-140	116.5	33283	99.1,99.1
150	21.14	18.82	14.94	16.58	20.59	18.64	19.72	20.26	140-150	110.1	33393	99.5,99.5
160	22.85	20.91	18.05	19.42	22.62	22.04	22.43	22.16	150-160	92.67	33485	99.7,99.7
170	24.03	22.83	20.94	21.82	23.97	23.71	23.83	23.34	160-170	62.83	33548	99.9,99.9
180	24.48	24.13	23.26	23.41	24.63	23.99	23.32	23.52	170-180	22.36	33571	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 23526 lm

%lum = 70.1%

%lamp = 70.1%

Conical surface Flux(120deg): 30213 lm

%lum = 90.0%


%lamp = 90.0%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz Lamp Flux:33570.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

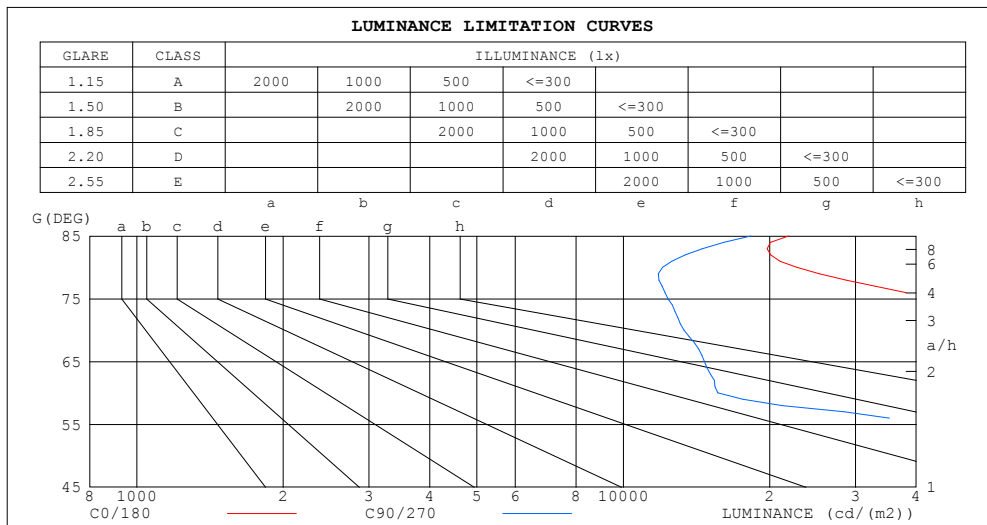

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	21856	18295
80	22740	12038
75	43871	12360
70	83669	13325
65	130828	14682
60	175550	15643
55	185058	48657
50	182101	104726
45	177403	130064


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz Lamp Flux:33570.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.07	1.03	1.00	1.04	1.01	.99	.00	.97	.95	.96	.94	.92	.92	.90	.89	.87
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.86	.83	.80	.83	.80	.78	.76
3.0	.86	.79	.74	.84	.78	.73	.81	.76	.71	.78	.74	.70	.75	.72	.68	.66
4.0	.78	.70	.64	.76	.69	.64	.73	.67	.63	.71	.66	.62	.69	.64	.61	.59
5.0	.70	.62	.57	.69	.62	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.53	.49	.57	.52	.48	.46
7.0	.58	.51	.45	.58	.50	.45	.56	.49	.44	.54	.48	.44	.53	.48	.43	.42
8.0	.54	.46	.41	.53	.46	.40	.51	.45	.40	.50	.44	.40	.49	.43	.39	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.46	.40	.36	.45	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.34	.44	.38	.33	.43	.37	.33	.42	.37	.33	.31

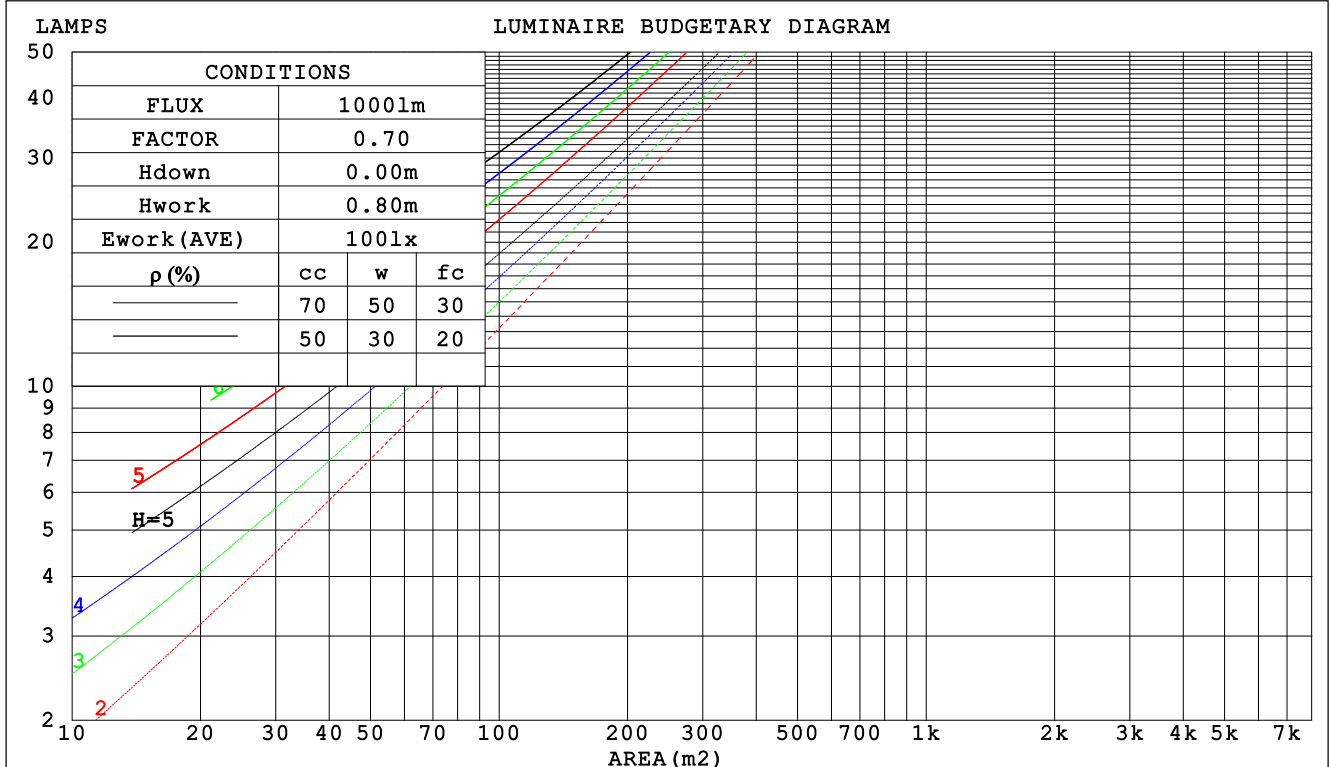

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz Lamp Flux:33570.6x1 lm									
NAME:				TYPE:			WEIGHT:		
SPEC.:				DIM.:			SERIAL No.:		
MFR.: EVERFINE				SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.243	.138	.044	.235	.134	.043	.221	.127	.041	.208	.120	.039	.196	.114	.037		
2.0	.236	.129	.040	.229	.126	.039	.217	.120	.037	.205	.115	.036	.194	.110	.035		
3.0	.224	.119	.036	.218	.117	.035	.207	.112	.034	.197	.108	.033	.188	.104	.032		
4.0	.211	.110	.032	.206	.108	.032	.197	.104	.031	.187	.101	.030	.179	.097	.030		
5.0	.199	.102	.029	.195	.100	.029	.186	.097	.029	.178	.094	.028	.170	.091	.027		
6.0	.188	.094	.027	.184	.093	.027	.176	.090	.026	.169	.088	.026	.162	.085	.025		
7.0	.177	.088	.025	.174	.086	.025	.167	.084	.024	.160	.082	.024	.154	.080	.023		
8.0	.167	.082	.023	.164	.081	.023	.158	.079	.023	.152	.077	.022	.146	.075	.022		
9.0	.158	.077	.021	.155	.076	.021	.150	.074	.021	.144	.072	.021	.139	.071	.020		
10.0	.150	.072	.020	.148	.071	.020	.142	.070	.020	.137	.068	.019	.133	.067	.019		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.209	.209	.209	.178	.178	.178	.122	.122	.122	.070	.070	.070	.022	.022	.022		
1.0	.194	.175	.158	.166	.150	.136	.114	.103	.094	.065	.060	.055	.021	.019	.018		
2.0	.183	.151	.123	.157	.130	.107	.108	.090	.074	.062	.052	.044	.020	.017	.014		
3.0	.174	.133	.100	.149	.114	.086	.103	.080	.061	.059	.046	.036	.019	.015	.012		
4.0	.166	.119	.083	.143	.103	.072	.098	.072	.051	.057	.042	.030	.018	.014	.010		
5.0	.159	.108	.071	.137	.094	.061	.094	.065	.043	.055	.038	.026	.018	.013	.008		
6.0	.152	.100	.062	.131	.086	.054	.090	.060	.038	.052	.036	.023	.017	.012	.007		
7.0	.146	.093	.055	.126	.080	.048	.087	.056	.034	.050	.033	.020	.016	.011	.007		
8.0	.140	.087	.050	.121	.075	.044	.084	.053	.031	.049	.031	.018	.016	.010	.006		
9.0	.135	.082	.046	.116	.071	.040	.081	.050	.029	.047	.030	.017	.015	.010	.006		
10.0	.130	.078	.043	.112	.067	.037	.078	.047	.027	.045	.028	.016	.015	.009	.005		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz Lamp Flux:33570.6x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.: EVERFINE			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.7	20.0	19.0	20.2	20.4	15.1	16.3	15.3	16.6	16.8
3H	19.3	20.5	19.7	20.8	21.1	14.9	16.1	15.3	16.4	16.6
4H	19.4	20.5	19.7	20.8	21.1	14.9	16.0	15.2	16.3	16.6
6H	19.3	20.4	19.7	20.7	21.0	14.8	15.9	15.2	16.2	16.5
8H	19.3	20.3	19.7	20.6	20.9	14.8	15.8	15.2	16.1	16.4
12H	19.3	20.2	19.6	20.5	20.9	14.8	15.7	15.1	16.0	16.4
4H 2H	18.5	19.6	18.8	19.9	20.1	15.0	16.1	15.4	16.4	16.7
3H	19.2	20.1	19.6	20.5	20.8	14.9	15.9	15.3	16.2	16.6
4H	19.3	20.1	19.7	20.5	20.9	14.9	15.8	15.3	16.1	16.5
6H	19.2	20.0	19.7	20.4	20.8	14.9	15.7	15.3	16.0	16.4
8H	19.2	19.9	19.7	20.3	20.8	14.9	15.6	15.3	16.0	16.4
12H	19.2	19.8	19.6	20.3	20.7	14.9	15.5	15.3	16.0	16.4
8H 4H	19.1	19.8	19.6	20.2	20.7	14.9	15.6	15.3	16.0	16.4
6H	19.1	19.7	19.6	20.2	20.6	14.9	15.5	15.4	15.9	16.4
8H	19.1	19.6	19.6	20.1	20.6	14.9	15.4	15.4	15.9	16.4
12H	19.1	19.5	19.6	20.0	20.6	15.0	15.4	15.5	15.9	16.4
12H 4H	19.1	19.7	19.5	20.2	20.6	14.8	15.5	15.3	15.9	16.4
6H	19.1	19.6	19.6	20.1	20.6	14.9	15.4	15.4	15.8	16.3
8H	19.1	19.5	19.6	20.0	20.5	14.9	15.3	15.4	15.8	16.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.8					+ 2.2 / - 4.7				
1.5H	+ 0.8 / - 1.3					+ 0.7 / - 3.1				
2.0H	+ 2.3 / - 5.4					+ 3.9 / - 6.0				

CIE Pub.117, 33571 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 12.2)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz Lamp Flux:33570.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	66	56	50	65	56	50	64	55	50	44
0.80	76	66	60	75	66	60	73	65	59	53
1.00	84	75	69	83	74	69	81	75	68	62
1.25	90	82	76	89	81	76	86	80	75	69
1.50	95	87	81	93	86	81	90	84	80	73
2.00	100	94	89	98	92	88	95	90	86	79
2.50	103	97	92	101	96	91	97	93	89	81
3.00	106	101	96	104	99	95	100	96	92	84
4.00	109	104	101	106	103	99	102	99	96	87
5.00	111	107	104	108	105	102	103	101	99	89
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz Lamp Flux:33570.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

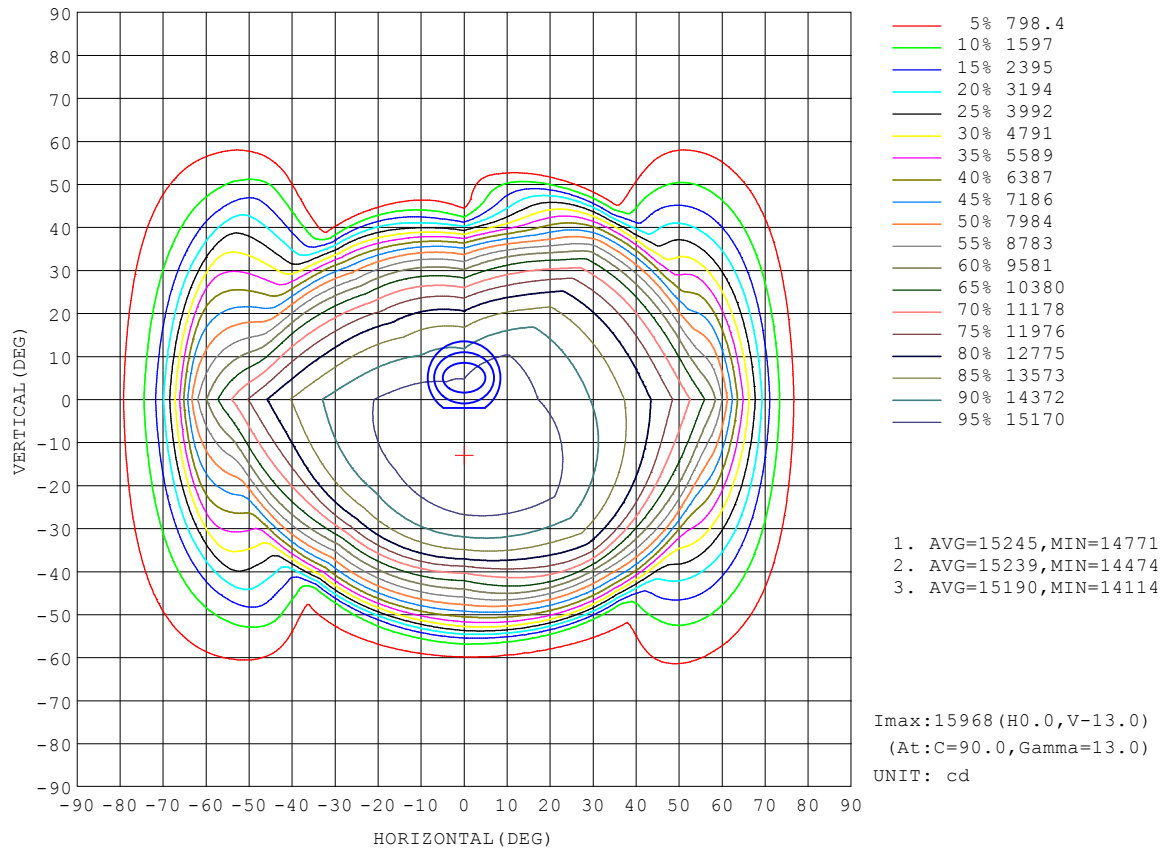


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz Lamp Flux:33570.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

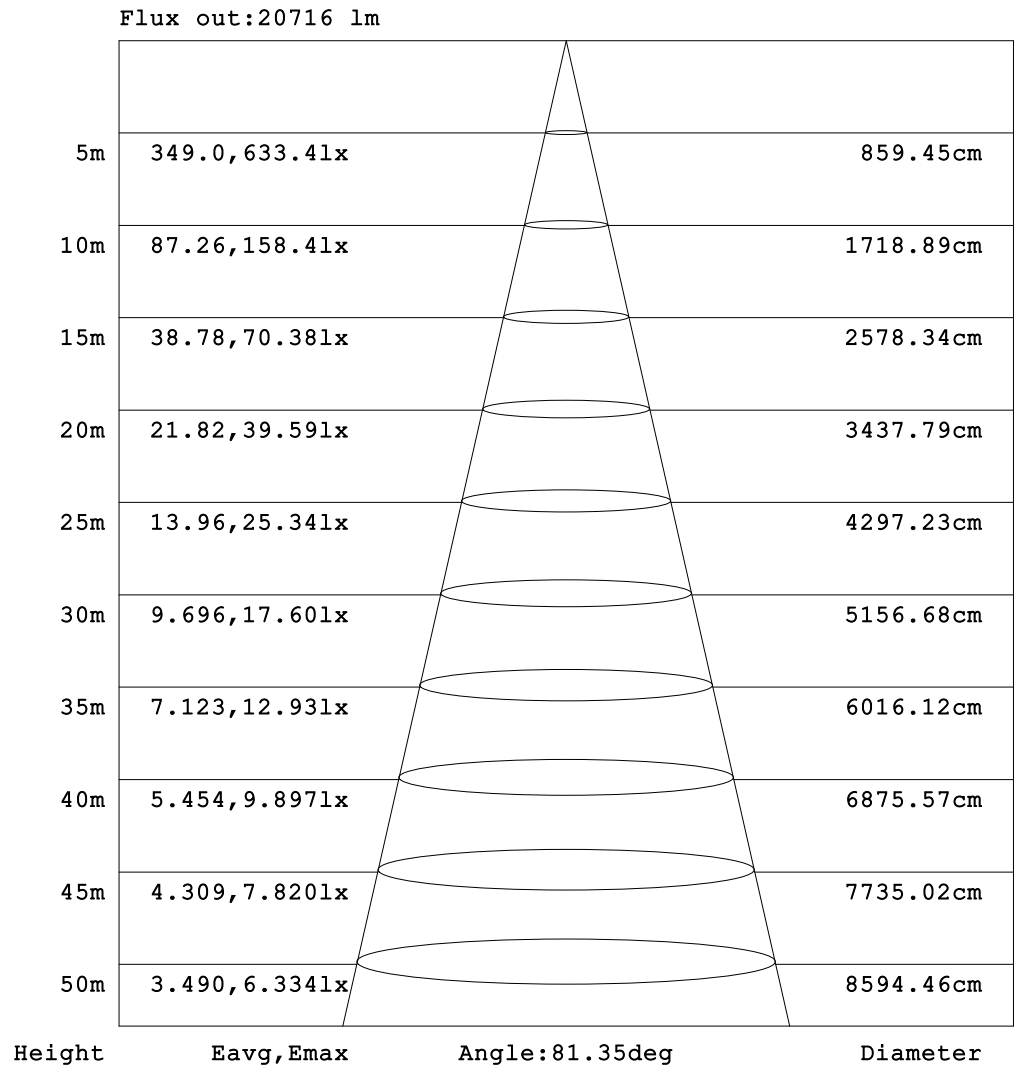


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz Lamp Flux:33570.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

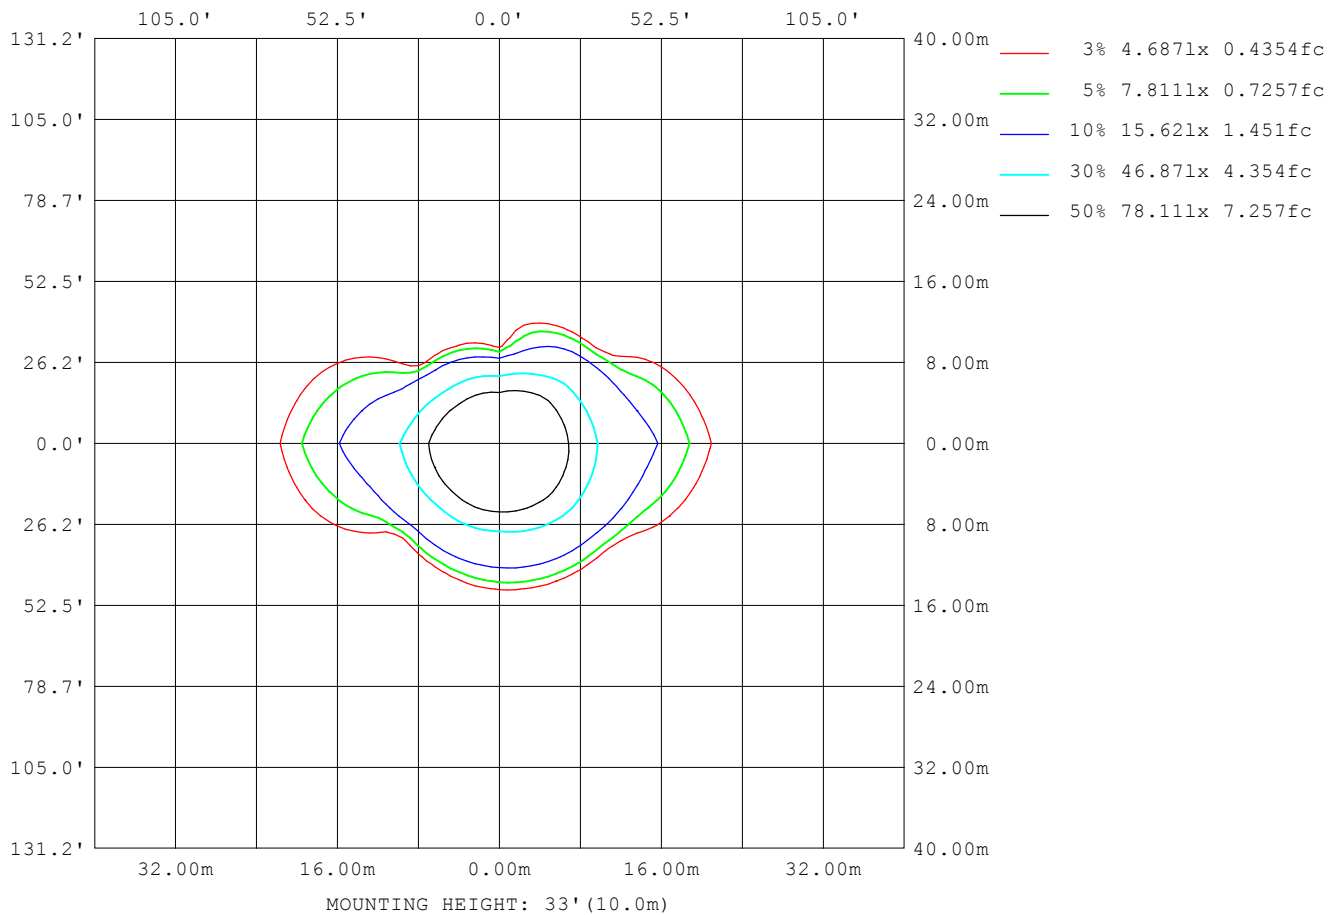

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz Lamp Flux:33570.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	143071
L_0~180 (75) av	50446
L_0~180 (85) av	27148
L_90~270 (65) av	9009
L_90~270 (75) av	7821
L_90~270 (85) av	12693
L_45 (65) av	10721
L_45 (75) av	9297
L_45 (85) av	12834

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

Planar Illuminance Curve

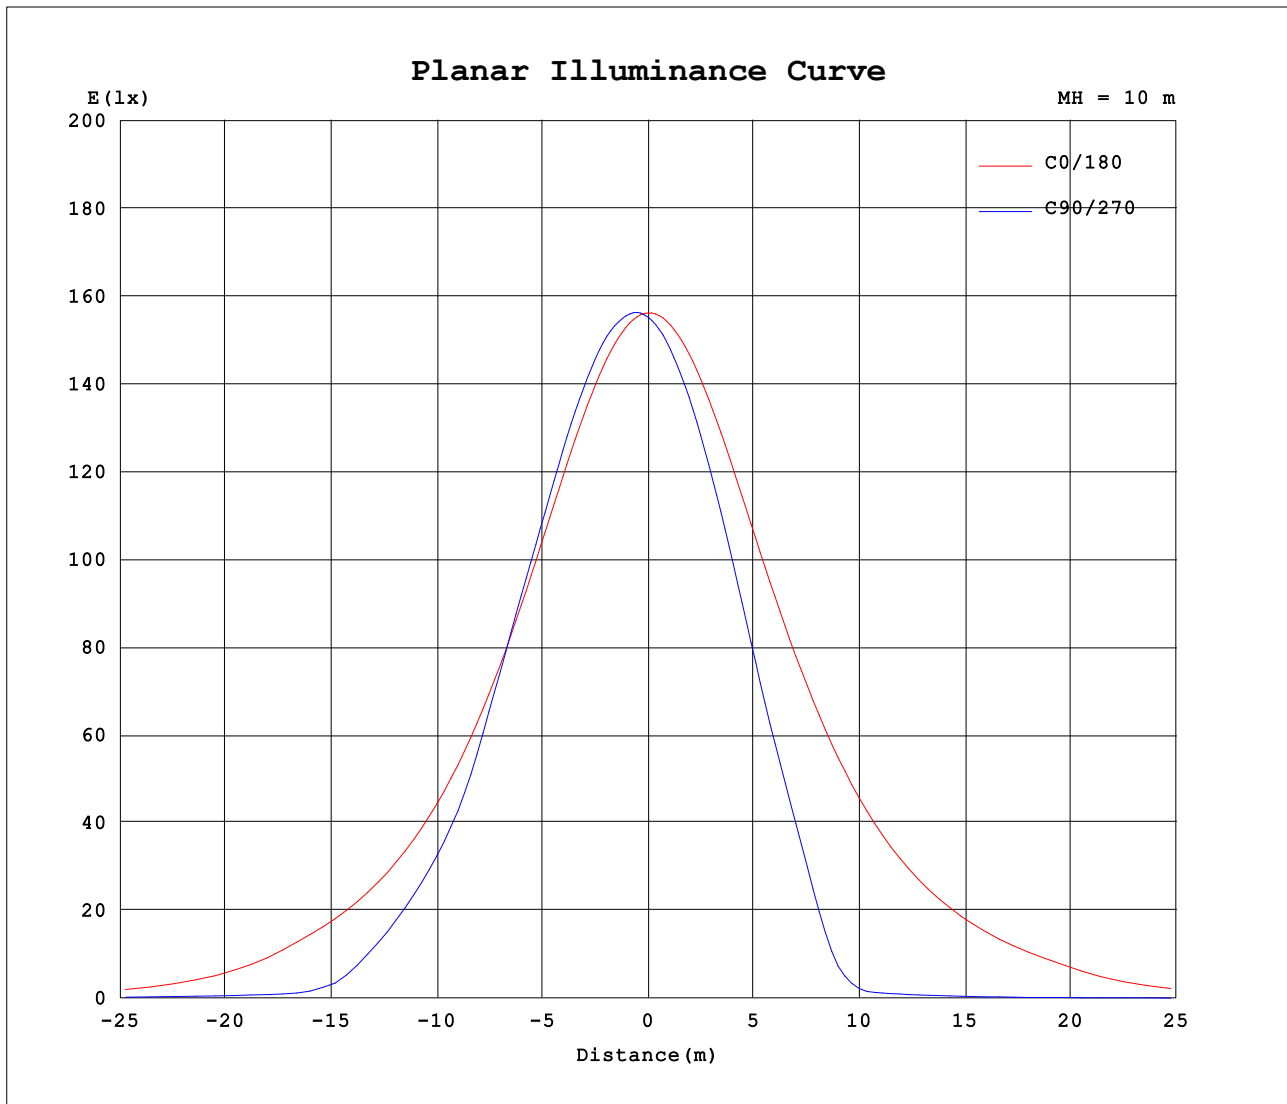

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-07-15

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz Lamp Flux:33570.6x1 lm								
NAME:				TYPE:				WEIGHT:
SPEC.:				DIM.:				SERIAL No.:
MFR.: EVERFINE				SUR.:				Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1562	1552	1552	1582	1562	1552	1552	1582										
5	1557	1571	1578	1589	1562	1522	1514	1568										
10	1545	1581	1593	1584	1555	1482	1460	1546										
15	1526	1584	1595	1569	1541	1428	1387	1514										
20	1502	1578	1578	1542	1521	1358	1289	1472										
25	1471	1557	1537	1494	1495	1265	1151	1415										
30	1431	1522	1475	1429	1461	1137	965	1343										
35	1382	1460	1355	1327	1419	959	725	1248										
40	1324	1369	1136	1138	1362	723	335	1116										
45	1254	1195	920	880	1291	352	63.5	909										
50	1171	855	673	555	1203	51.7	36.7	561										
55	1061	412	279	84.1	1095	35.1	27.4	67.7										
60	878	82.2	78.2	69.2	954	27.9	20.4	41.2										
65	553	69.2	62.0	59.3	656	19.7	14.1	33.1										
70	286	57.8	45.6	44.7	313	14.5	10.9	24.2										
75	114	39.7	32.0	30.1	148	9.83	8.49	16.7										
80	39.5	26.9	20.9	18.3	70.8	7.21	6.15	11.1										
85	19.0	16.8	15.9	13.0	28.3	6.03	6.18	8.87										
90	13.9	12.7	12.1	9.91	9.83	6.47	6.10	8.27										
95	12.4	10.5	8.57	8.80	7.48	6.57	6.58	8.33										
100	11.9	9.57	7.56	8.41	7.97	7.36	7.26	8.66										
105	11.9	8.90	6.95	8.46	8.80	8.23	8.03	9.32										
110	12.4	9.03	6.74	8.75	9.82	9.17	8.84	9.78										
115	13.1	9.90	7.10	9.24	11.1	10.1	9.70	11.1										
120	14.2	10.8	7.71	9.84	12.5	11.0	10.8	12.8										
125	15.6	11.9	8.49	10.6	14.0	12.1	12.5	14.6										
130	17.0	13.4	9.45	11.5	15.4	13.4	14.3	16.0										
135	18.2	15.1	10.5	12.5	16.8	14.6	15.8	17.3										
140	19.2	16.5	11.7	13.8	18.0	15.7	17.3	18.4										
145	20.2	17.7	13.2	15.1	19.3	17.1	18.6	19.3										
150	21.1	18.8	14.9	16.6	20.6	18.6	19.7	20.3										
155	22.0	19.9	16.5	18.0	21.7	20.5	21.0	21.2										
160	22.9	20.9	18.0	19.4	22.6	22.0	22.4	22.2										
165	23.5	21.9	19.5	20.7	23.4	23.1	23.4	22.9										
170	24.0	22.8	20.9	21.8	24.0	23.7	23.8	23.3										
175	24.4	23.6	22.3	22.8	24.4	24.0	23.9	23.6										
180	24.5	24.1	23.3	23.4	24.6	24.0	23.3	23.5										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-07-15

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks: