


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz Lamp Flux:48703.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 205.36 lm/W			
MODEL		I _{max} (cd)	22803	S/MH (C0/180)	1.40
NOMINAL POWER(W)	240	LOR(%)	100.0	S/MH (C90/270)	1.16
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	48703	η UP,DN(C0-180)	1.1,47.5
NOMINAL FLUX(lm)	48703.5	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.1,50.3
LAMPS INSIDE	1	η up (%)	2.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down (%)	97.8	CIBSE SHR MAX	1.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

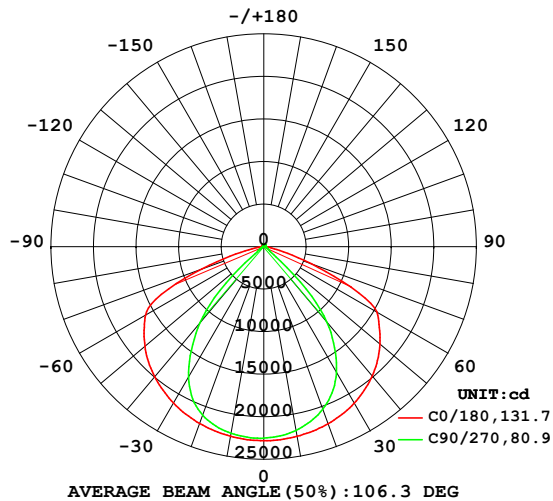

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

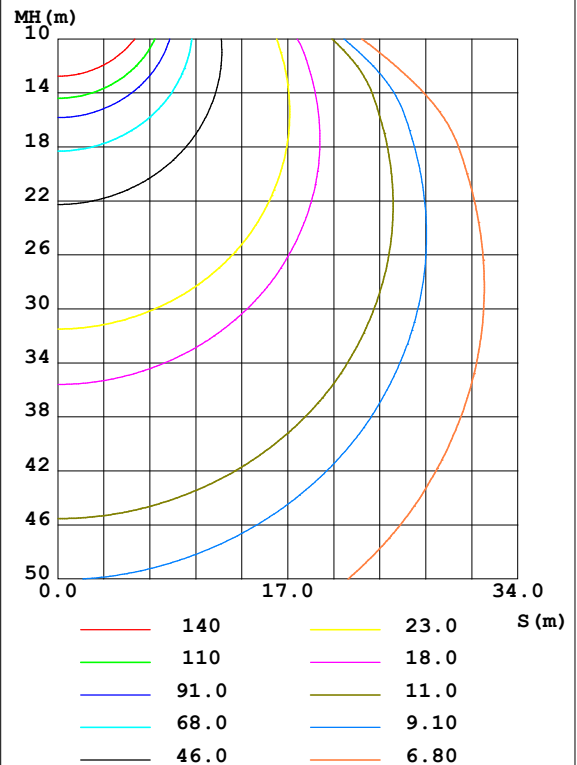

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2263	2231	2192	2181	2262	2241	2227	2234	0- 10	2142	2142	4.4,4.4
20	2214	2127	2033	2051	2210	2154	2105	2173	10- 20	6185	8327	17.1,17.1
30	2126	1933	1709	1809	2123	1961	1772	2031	20- 30	9437	17764	36.5,36.5
40	1983	1545	1152	1329	1996	1494	1164	1687	30- 40	10987	28751	59,59
50	1783	706.0	191.4	369.4	1824	581.6	199.1	911.8	40- 50	9339	38091	78.2,78.2
60	1534	83.73	65.30	78.41	1606	66.09	49.46	71.91	50- 60	4939	43030	88.4,88.4
70	593.5	49.38	31.78	43.70	779.2	34.84	20.76	43.66	60- 70	3341	46371	95.2,95.2
80	81.84	20.94	16.21	18.93	113.2	11.83	9.909	14.04	70- 80	1056	47427	97.4,97.4
90	20.82	13.59	10.94	12.56	12.27	8.617	7.309	8.274	80- 90	205.0	47632	97.8,97.8
100	16.66	11.87	8.893	10.80	11.07	8.965	8.326	10.02	90-100	119.1	47751	98,98
110	16.38	13.73	9.729	11.91	13.74	11.11	10.28	12.59	100-110	121.8	47873	98.3,98.3
120	18.21	16.77	12.21	13.91	17.08	13.39	12.51	15.85	110-120	135.2	48009	98.6,98.6
130	21.04	21.15	15.52	16.54	20.45	15.75	15.46	20.54	120-130	148.6	48157	98.9,98.9
140	24.08	24.99	19.54	19.87	23.79	18.87	19.86	24.25	130-140	155.3	48312	99.2,99.2
150	27.14	27.47	23.96	23.95	27.40	22.61	23.76	27.18	140-150	148.2	48461	99.5,99.5
160	29.92	29.99	28.14	27.99	30.69	27.36	27.97	30.12	150-160	125.5	48586	99.8,99.8
170	32.07	32.11	31.60	31.18	32.48	30.98	32.34	32.50	160-170	86.26	48672	99.9,99.9
180	32.98	32.75	33.71	33.14	33.14	32.61	33.81	33.21	170-180	31.01	48703	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 33922 lm

%lum = 69.7%

%lamp = 69.7%

Conical surface Flux(120deg): 43030 lm

%lum = 88.4%


%lamp = 88.4%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz Lamp Flux:48703.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

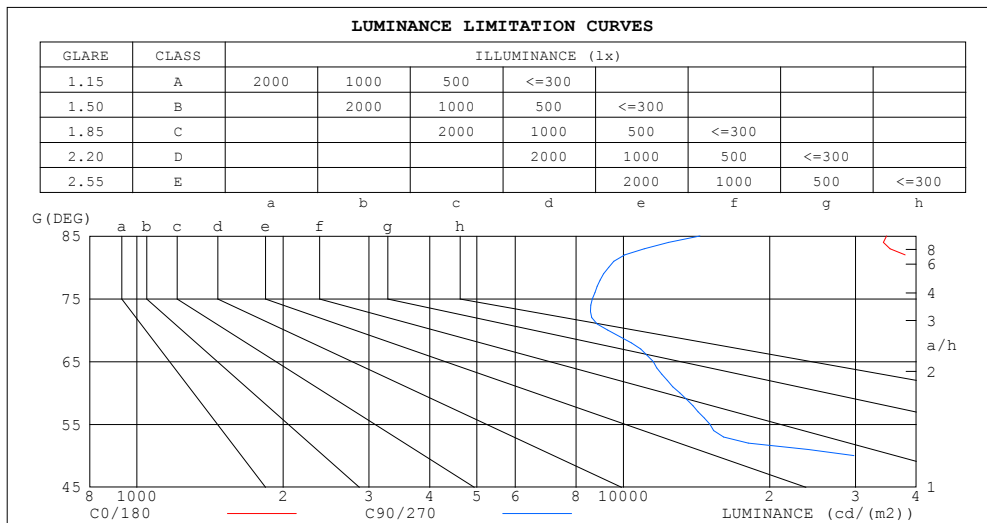

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	34750	14371
80	47128	9337
75	92904	8639
70	173529	9292
65	267115	11520
60	306738	13060
55	289642	15077
50	277410	29769
45	267628	100158


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-06-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz Lamp Flux:48703.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.07	1.03	1.00	1.04	1.01	.98	.90	.97	.95	.95	.93	.92	.92	.90	.88	.86
2.0	.95	.90	.85	.93	.88	.84	.90	.85	.82	.86	.83	.79	.83	.80	.77	.75
3.0	.86	.79	.73	.84	.77	.72	.81	.75	.71	.78	.73	.69	.75	.71	.68	.66
4.0	.77	.69	.64	.76	.69	.63	.73	.67	.62	.71	.65	.61	.68	.64	.60	.58
5.0	.70	.62	.56	.69	.61	.56	.66	.60	.55	.64	.59	.54	.62	.57	.53	.51
6.0	.63	.56	.50	.62	.55	.49	.61	.54	.49	.59	.53	.48	.57	.52	.48	.46
7.0	.58	.50	.45	.57	.50	.44	.56	.49	.44	.54	.48	.43	.52	.47	.43	.41
8.0	.53	.46	.40	.53	.45	.40	.51	.44	.40	.50	.44	.39	.48	.43	.39	.37
9.0	.49	.42	.37	.49	.41	.36	.47	.41	.36	.46	.40	.36	.45	.40	.36	.34
10.0	.46	.38	.33	.45	.38	.33	.44	.37	.33	.43	.37	.33	.42	.36	.33	.31

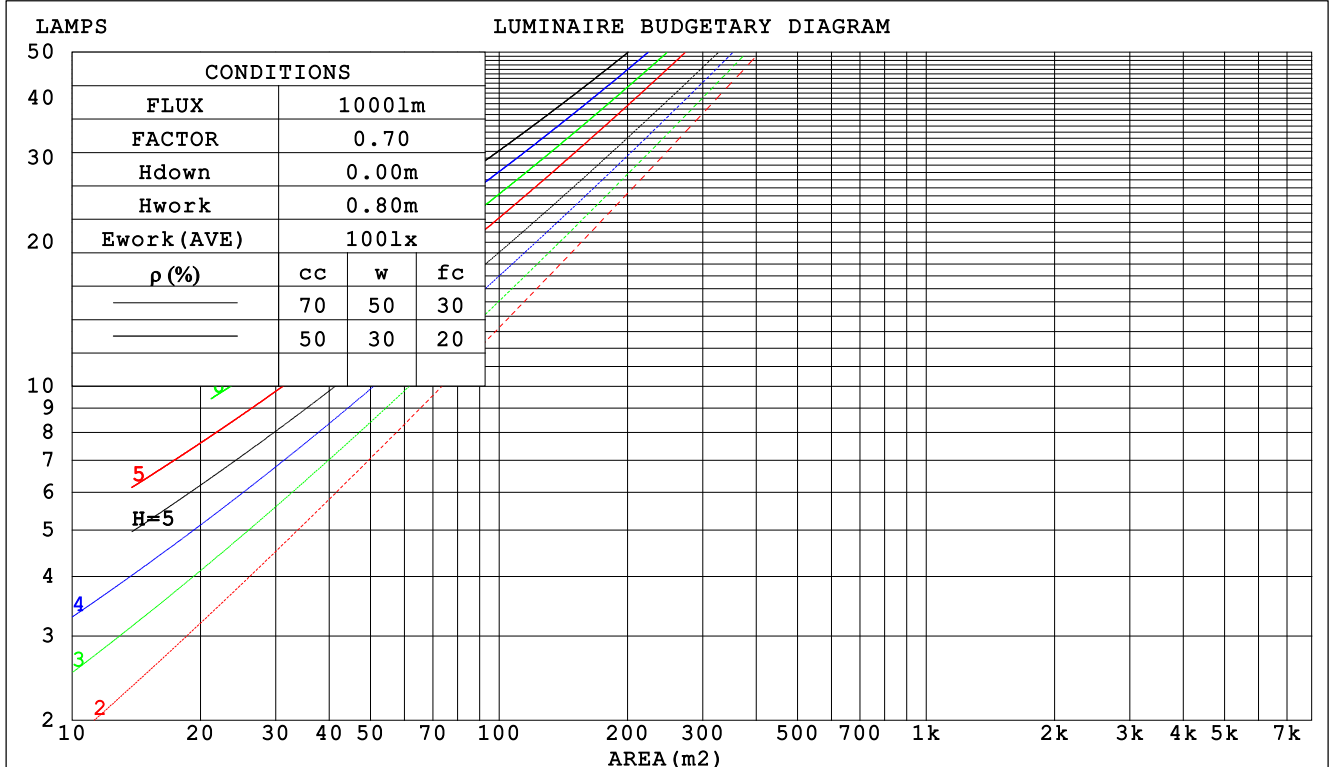

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz Lamp Flux:48703.5x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.: EVERFINE		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.247	.141	.045	.240	.137	.043	.225	.129	.041	.212	.122	.039	.200	.116	.037		
2.0	.239	.131	.040	.233	.128	.040	.220	.123	.038	.209	.117	.037	.198	.112	.035		
3.0	.227	.121	.036	.221	.118	.036	.210	.114	.035	.200	.110	.034	.191	.106	.033		
4.0	.214	.111	.033	.209	.109	.032	.199	.106	.032	.190	.102	.031	.182	.099	.030		
5.0	.201	.103	.030	.197	.101	.029	.188	.098	.029	.180	.095	.028	.172	.092	.028		
6.0	.189	.095	.027	.185	.094	.027	.178	.091	.026	.170	.088	.026	.164	.086	.026		
7.0	.178	.088	.025	.175	.087	.025	.168	.085	.024	.161	.083	.024	.155	.081	.024		
8.0	.168	.082	.023	.165	.081	.023	.159	.079	.023	.153	.077	.022	.147	.076	.022		
9.0	.159	.077	.022	.156	.076	.021	.151	.074	.021	.145	.073	.021	.140	.071	.021		
10.0	.151	.072	.020	.148	.072	.020	.143	.070	.020	.138	.069	.020	.134	.067	.019		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.207	.207	.207	.177	.177	.177	.121	.121	.121	.069	.069	.069	.022	.022	.022		
1.0	.193	.174	.156	.165	.149	.134	.113	.102	.093	.065	.059	.054	.021	.019	.017		
2.0	.182	.149	.121	.156	.128	.105	.107	.089	.073	.062	.052	.043	.020	.017	.014		
3.0	.173	.131	.097	.149	.113	.085	.102	.079	.059	.059	.046	.035	.019	.015	.011		
4.0	.165	.117	.081	.142	.101	.070	.098	.071	.049	.056	.041	.029	.018	.013	.010		
5.0	.158	.107	.069	.136	.092	.060	.093	.064	.042	.054	.038	.025	.017	.012	.008		
6.0	.151	.098	.060	.130	.085	.052	.090	.059	.037	.052	.035	.022	.017	.011	.007		
7.0	.145	.091	.053	.125	.079	.046	.086	.055	.033	.050	.033	.020	.016	.011	.006		
8.0	.139	.085	.048	.120	.074	.042	.083	.052	.030	.048	.031	.018	.016	.010	.006		
9.0	.134	.080	.044	.115	.070	.039	.080	.049	.027	.046	.029	.016	.015	.010	.005		
10.0	.129	.076	.041	.111	.066	.036	.077	.047	.026	.045	.028	.015	.015	.009	.005		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:2025-06-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.250m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz Lamp Flux:48703.5x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: EVERFINE					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	18.9	20.2	19.2	20.4	20.6	11.3	12.6	11.6	12.9	13.1
	3H	20.1	21.3	20.4	21.6	21.8	11.2	12.4	11.5	12.7	12.9
	4H	20.2	21.4	20.6	21.6	21.9	11.1	12.3	11.5	12.5	12.8
	6H	20.2	21.3	20.6	21.6	21.9	11.1	12.1	11.4	12.4	12.7
	8H	20.2	21.2	20.5	21.5	21.8	11.0	12.0	11.4	12.4	12.7
	12H	20.1	21.1	20.5	21.4	21.8	11.0	12.0	11.4	12.3	12.6
4H	2H	18.6	19.8	19.0	20.0	20.3	11.7	12.8	12.0	13.1	13.4
	3H	19.9	20.9	20.3	21.2	21.6	11.6	12.5	11.9	12.9	13.2
	4H	20.1	21.0	20.5	21.3	21.7	11.5	12.4	11.9	12.7	13.1
	6H	20.1	20.9	20.5	21.3	21.7	11.5	12.2	11.9	12.6	13.0
	8H	20.1	20.8	20.5	21.2	21.6	11.5	12.2	11.9	12.6	13.0
	12H	20.1	20.7	20.5	21.1	21.6	11.5	12.1	11.9	12.5	13.0
8H	4H	20.0	20.7	20.4	21.1	21.5	11.7	12.4	12.1	12.8	13.2
	6H	20.0	20.6	20.5	21.0	21.5	11.6	12.2	12.1	12.7	13.1
	8H	20.0	20.5	20.5	21.0	21.5	11.6	12.2	12.1	12.6	13.1
	12H	20.0	20.4	20.5	20.9	21.4	11.7	12.1	12.2	12.6	13.1
12H	4H	19.9	20.6	20.4	21.0	21.4	11.6	12.3	12.1	12.7	13.2
	6H	19.9	20.5	20.4	20.9	21.4	11.6	12.1	12.1	12.6	13.1
	8H	19.9	20.4	20.4	20.9	21.4	11.6	12.1	12.2	12.6	13.1
Variations with the observer position at spacings:											
S = 1.0H		+ 0.5 / - 0.7					+ 2.5 / - 5.8				
1.5H		+ 1.2 / - 2.1					+ 2.2 / - 5.3				
2.0H		+ 2.9 / - 5.1					+ 5.0 / - 4.3				

CIE Pub.117, 48703 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 13.5)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz Lamp Flux:48703.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	66	56	50	65	56	50	64	55	50	44
0.80	76	66	60	75	66	60	73	65	59	53
1.00	84	74	68	82	74	68	80	74	67	61
1.25	90	81	76	89	81	75	86	79	74	68
1.50	94	86	81	93	85	80	90	84	79	72
2.00	100	93	88	98	92	87	95	89	85	78
2.50	103	97	92	101	95	91	97	93	89	81
3.00	106	100	96	103	99	95	99	95	92	84
4.00	109	104	101	106	102	99	102	99	96	87
5.00	111	107	104	108	105	102	104	101	99	89
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-06-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz Lamp Flux:48703.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

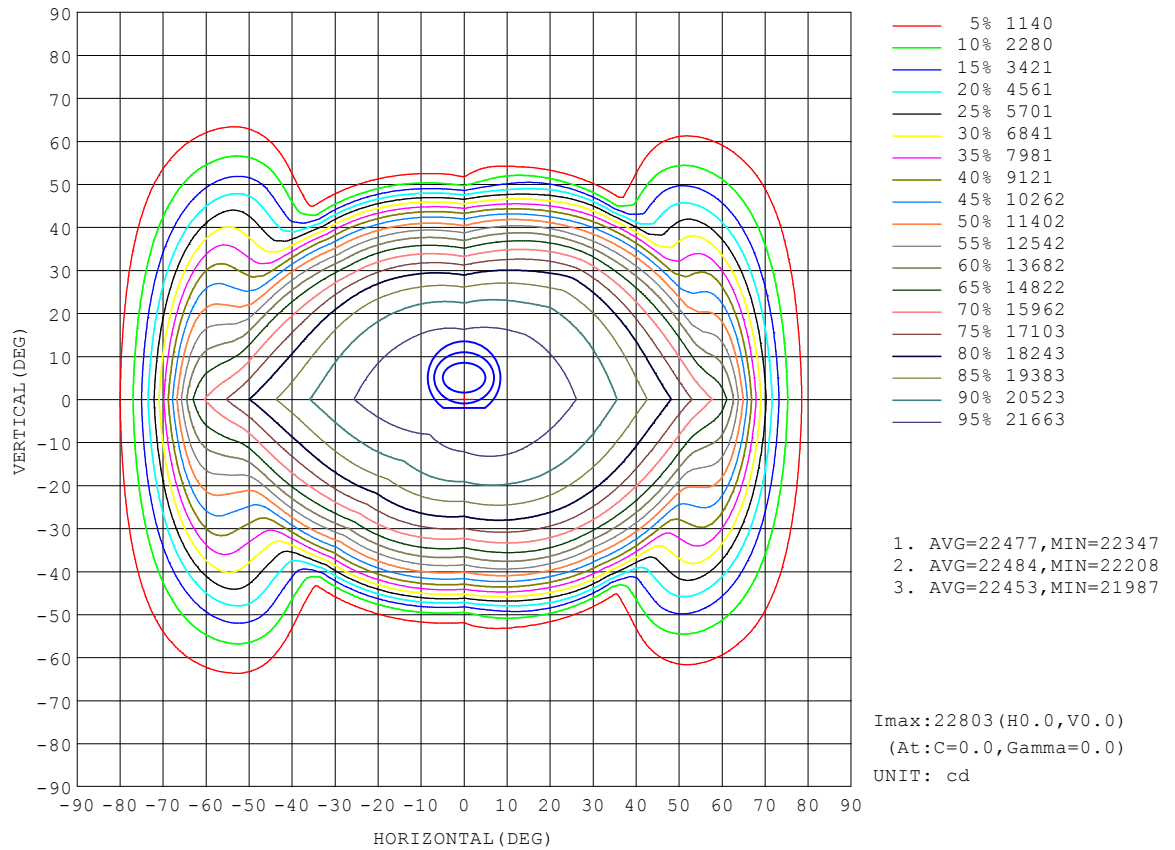


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-06-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

AAI Figure

Test:U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz Lamp Flux:48703.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

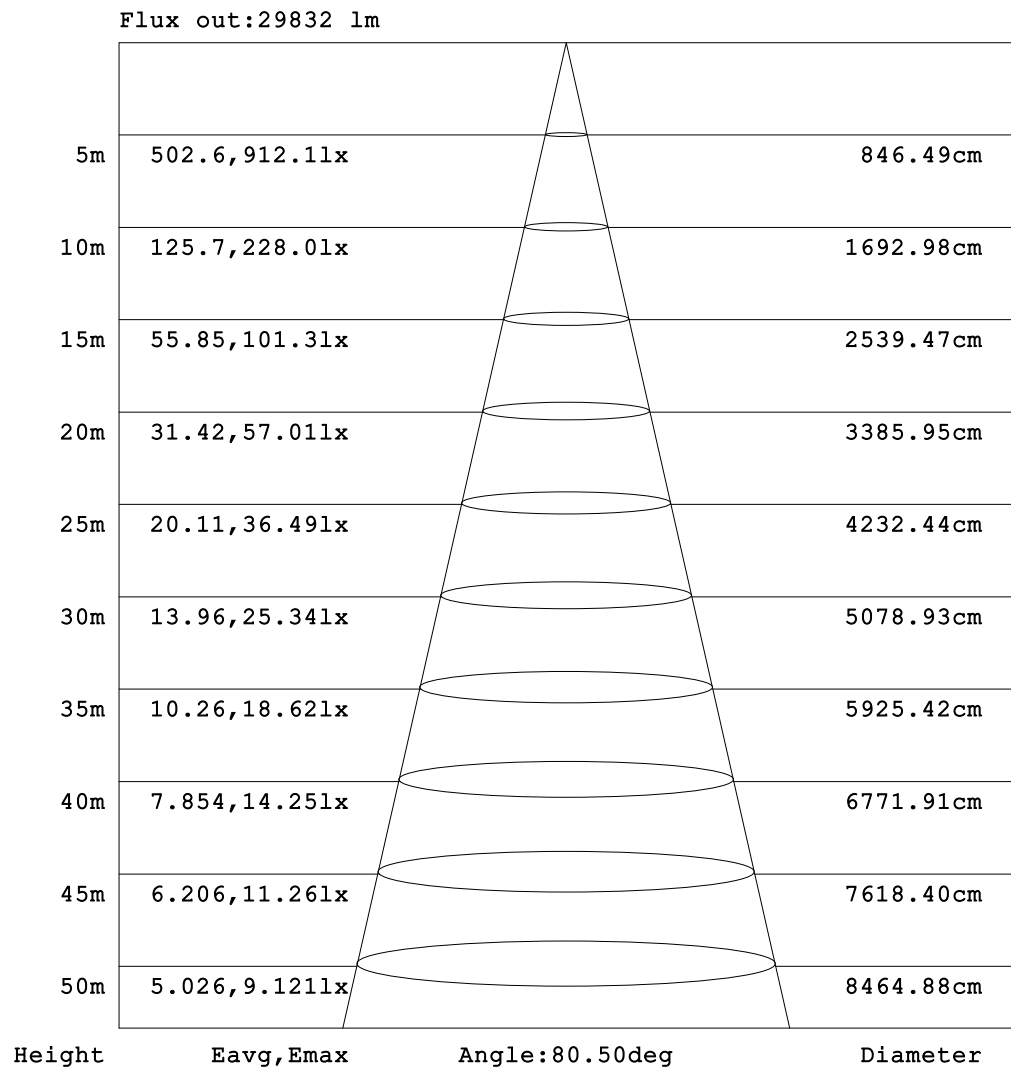


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-06-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz Lamp Flux:48703.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

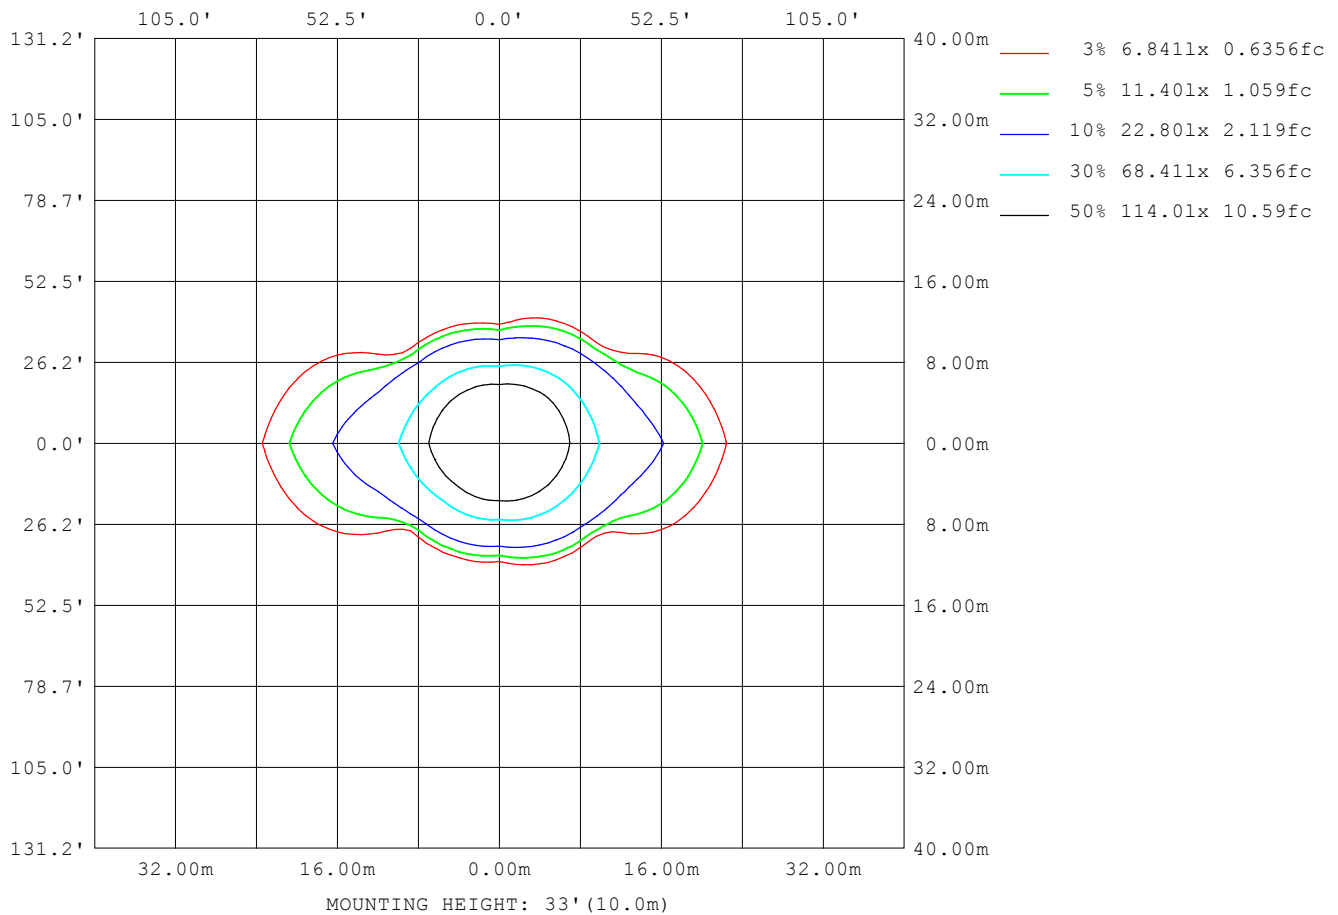

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz Lamp Flux:48703.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	290684
L_0~180 (75) av	112786
L_0~180 (85) av	35564
L_90~270 (65) av	9791
L_90~270 (75) av	6925
L_90~270 (85) av	11295
L_45 (65) av	14383
L_45 (75) av	10667
L_45 (85) av	14012

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks:

Planar Illuminance Curve

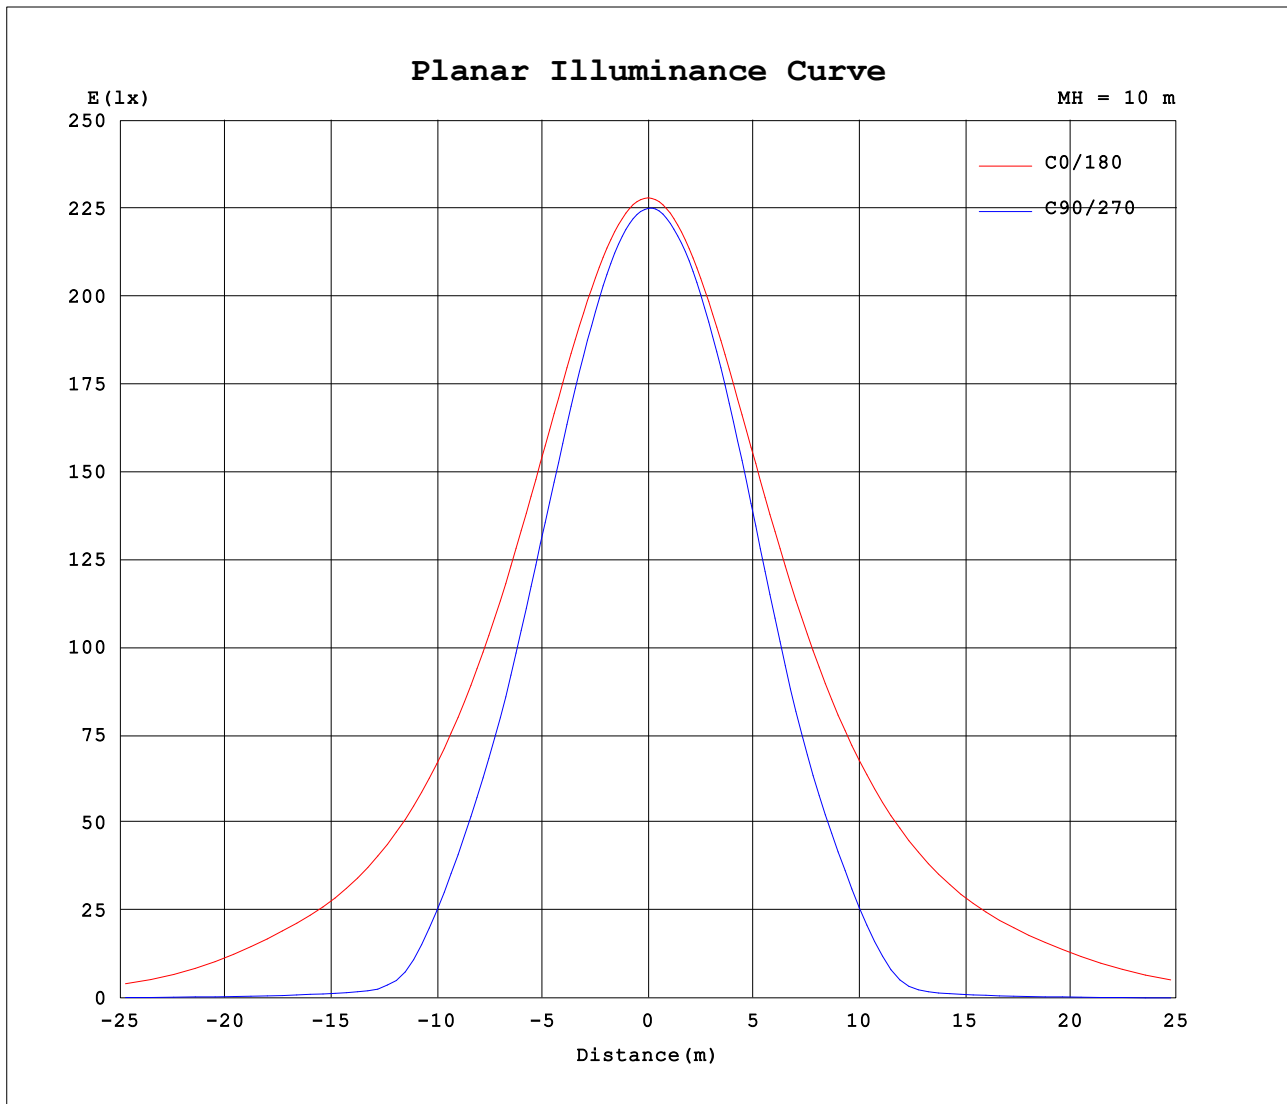

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2025-06-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.250m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz Lamp Flux:48703.5x1 lm								
NAME:				TYPE:				WEIGHT:
SPEC.:				DIM.:				SERIAL No.:
MFR.: EVERFINE				SUR.:				Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2280	2266	2251	2237	2280	2266	2251	2237										
5	2276	2255	2233	2218	2276	2260	2248	2243										
10	2263	2231	2192	2181	2262	2241	2227	2234										
15	2243	2189	2126	2124	2240	2208	2182	2209										
20	2214	2127	2033	2051	2210	2154	2105	2173										
25	2176	2046	1899	1948	2172	2077	1978	2114										
30	2126	1933	1709	1809	2123	1961	1772	2031										
35	2061	1776	1454	1613	2064	1774	1488	1902										
40	1983	1545	1152	1329	1996	1494	1164	1687										
45	1892	1204	708	951	1917	1128	732	1353										
50	1783	706	191	369	1824	582	199	912										
55	1661	107	86.5	95.0	1717	90.4	68.4	202										
60	1534	83.7	65.3	78.4	1606	66.1	49.5	71.9										
65	1129	69.2	48.7	61.5	1328	52.3	34.1	60.1										
70	594	49.4	31.8	43.7	779	34.8	20.8	43.7										
75	240	34.3	22.4	27.0	343	21.7	13.5	27.4										
80	81.8	20.9	16.2	18.9	113	11.8	9.91	14.0										
85	30.3	15.7	12.5	15.1	31.7	8.72	7.16	9.34										
90	20.8	13.6	10.9	12.6	12.3	8.62	7.31	8.27										
95	18.0	12.0	9.66	11.0	10.2	8.34	7.65	9.00										
100	16.7	11.9	8.89	10.8	11.1	8.96	8.33	10.0										
105	16.2	12.6	8.96	11.2	12.3	10.00	9.22	11.2										
110	16.4	13.7	9.73	11.9	13.7	11.1	10.3	12.6										
115	17.1	15.1	10.8	12.8	15.3	12.2	11.4	14.1										
120	18.2	16.8	12.2	13.9	17.1	13.4	12.5	15.8										
125	19.6	18.7	13.8	15.2	18.8	14.5	13.7	18.2										
130	21.0	21.2	15.5	16.5	20.5	15.7	15.5	20.5										
135	22.5	23.4	17.3	18.1	22.1	17.2	17.7	22.5										
140	24.1	25.0	19.5	19.9	23.8	18.9	19.9	24.2										
145	25.6	26.2	21.8	21.8	25.6	20.6	21.8	25.8										
150	27.1	27.5	24.0	23.9	27.4	22.6	23.8	27.2										
155	28.6	28.7	26.1	26.0	29.2	24.8	25.8	28.6										
160	29.9	30.0	28.1	28.0	30.7	27.4	28.0	30.1										
165	31.1	31.2	30.0	29.8	31.8	29.4	30.4	31.5										
170	32.1	32.1	31.6	31.2	32.5	31.0	32.3	32.5										
175	32.7	32.7	33.0	32.5	32.9	32.0	33.4	33.1										
180	33.0	32.8	33.7	33.1	33.1	32.6	33.8	33.2										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2025-06-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.250m [K=1.0000]
Remarks: