


室内灯具光度数据

实测参数: U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz 实检光通:33570.6x1 lm					
灯具名称:		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面:		遮光角:	

光源数据		光度数据				光效: 168.68 lm/W
型号		峰值光强(cd)	15968	S/MH(C0/180)	1.40	
标称功率(W)	200	灯具效率(%)	100.0	S/MH(C90/270)	1.00	
额定电源电压(V)	220	总光通量(lm)	33571	η UP,DN(C0-180)	1.2,54.6	
额定光通量(lm)	33570.6	CIE分类	直接	η UP,DN(C180-360)	1.2,43.0	
灯具内光源数(只)	1	上射光通比(%)	2.4	CIBSE SHR NOM	1.25	
实测电源电压(V)	220	下射光通比(%)	97.6	CIBSE SHR MAX	1.30	

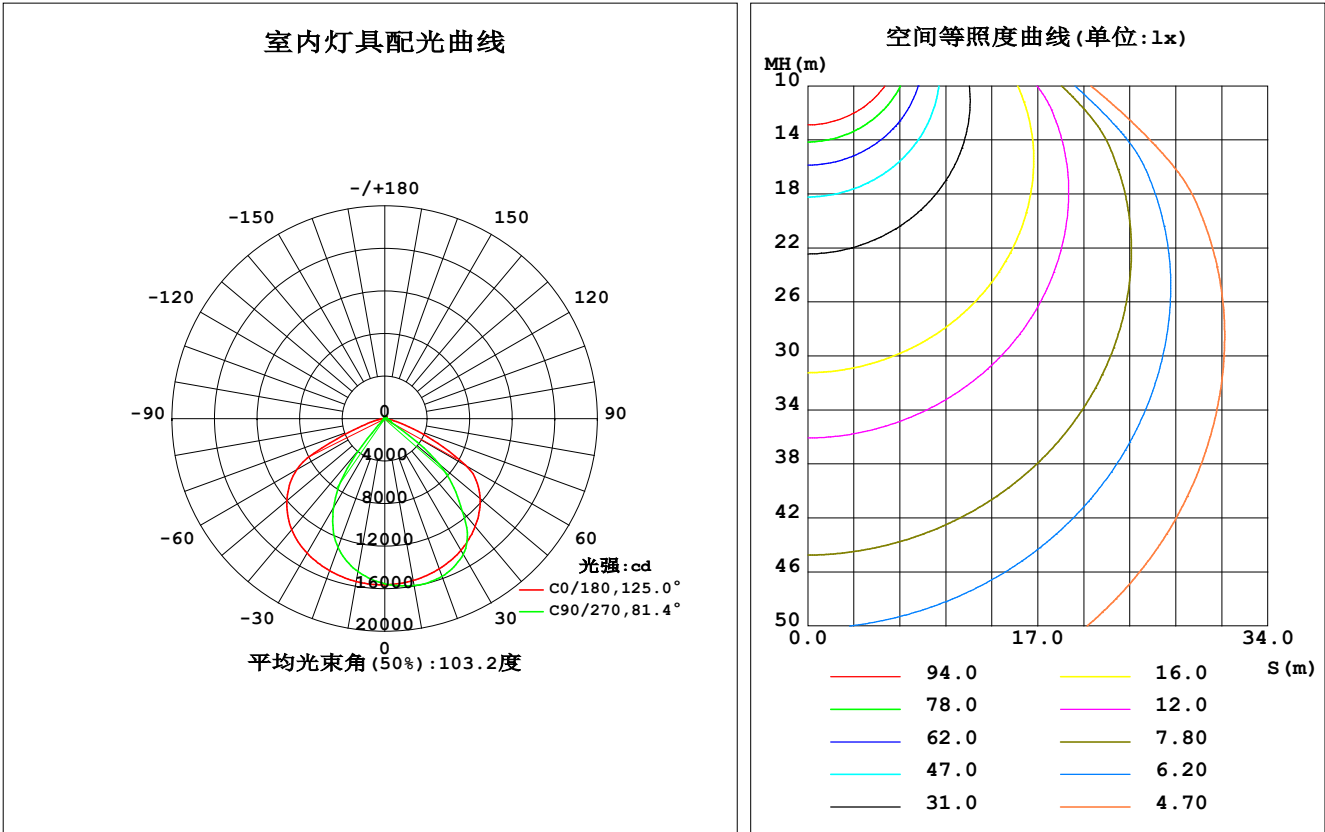

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-07-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	1545	1581	1593	1584	1555	1482	1460	1546	0- 10	1482	1482	4.41,4.41
20	1502	1578	1578	1542	1521	1358	1289	1472	10- 20	4288	5770	17.2,17.2
30	1431	1522	1475	1429	1461	1137	964.8	1343	20- 30	6552	12321	36.7,36.7
40	1324	1369	1136	1138	1362	723.5	334.5	1116	30- 40	7652	19974	59.5,59.5
50	1171	855.3	673.2	555.3	1203	51.66	36.66	561.2	40- 50	6567	26540	79.1,79.1
60	877.7	82.16	78.22	69.18	953.6	27.86	20.44	41.15	50- 60	3673	30213	90,90
70	286.2	57.77	45.57	44.70	313.2	14.53	10.88	24.19	60- 70	1814	32027	95.4,95.4
80	39.49	26.91	20.90	18.32	70.75	7.213	6.150	11.14	70- 80	568.6	32596	97.1,97.1
90	13.88	12.68	12.08	9.909	9.834	6.473	6.097	8.275	80- 90	167.0	32763	97.6,97.6
100	11.90	9.568	7.556	8.405	7.968	7.357	7.255	8.657	90-100	96.67	32859	97.9,97.9
110	12.36	9.030	6.735	8.747	9.822	9.169	8.839	9.783	100-110	93.80	32953	98.2,98.2
120	14.25	10.78	7.706	9.844	12.54	10.99	10.76	12.80	110-120	101.2	33054	98.5,98.5
130	17.01	13.36	9.452	11.46	15.42	13.39	14.25	15.98	120-130	111.7	33166	98.8,98.8
140	19.18	16.52	11.71	13.77	18.03	15.72	17.33	18.37	130-140	116.5	33283	99.1,99.1
150	21.14	18.82	14.94	16.58	20.59	18.64	19.72	20.26	140-150	110.1	33393	99.5,99.5
160	22.85	20.91	18.05	19.42	22.62	22.04	22.43	22.16	150-160	92.67	33485	99.7,99.7
170	24.03	22.83	20.94	21.82	23.97	23.71	23.83	23.34	160-170	62.83	33548	99.9,99.9
180	24.48	24.13	23.26	23.41	24.63	23.99	23.32	23.52	170-180	22.36	33571	100,100
单位:°	光强:×10cd									单位:lm		

锥面光通量(90度): 23526 lm

%lum = 70.1%
%lamp = 70.1%

锥面光通量(120度): 30213 lm


%lum = 90.0%
%lamp = 90.0%

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-07-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数: U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz 实检光通:33570.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

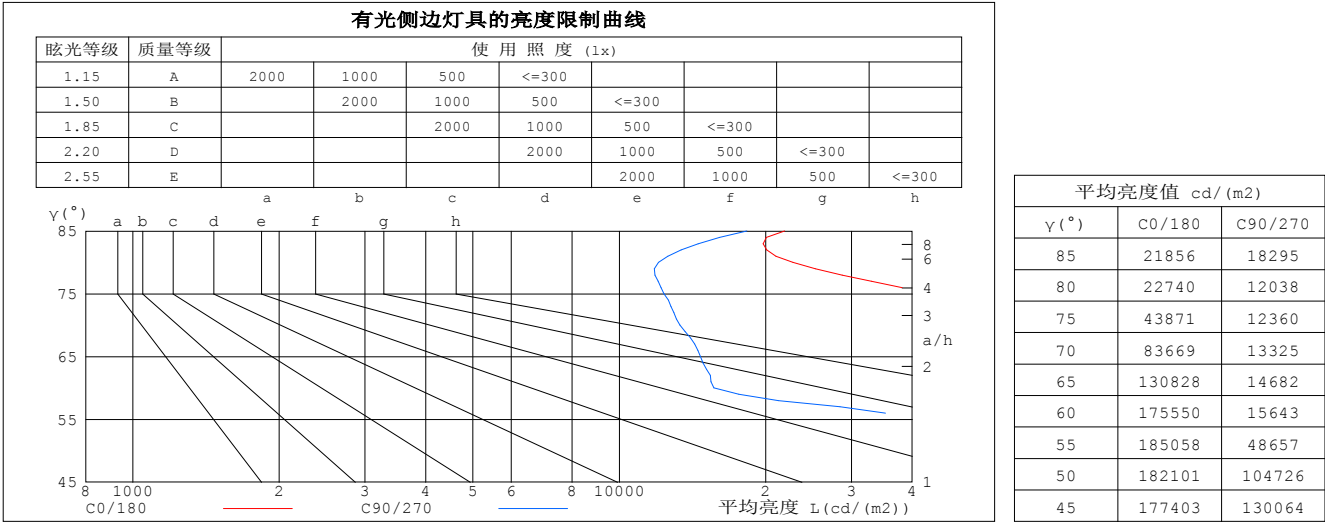


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-07-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz 实检光通:33570.6x1 lm															
灯具名称:				灯具类型:				灯具重量:							
灯具规格:				外型尺寸:				测试编号:							
制造厂商: EVERFINE				发光口面:				遮光角:							

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.07	1.03	1.00	1.04	1.01	.99	.00	.97	.95	.96	.94	.92	.92	.90	.89	.87
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.86	.83	.80	.83	.80	.78	.76
3.0	.86	.79	.74	.84	.78	.73	.81	.76	.71	.78	.74	.70	.75	.72	.68	.66
4.0	.78	.70	.64	.76	.69	.64	.73	.67	.63	.71	.66	.62	.69	.64	.61	.59
5.0	.70	.62	.57	.69	.62	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.53	.49	.57	.52	.48	.46
7.0	.58	.51	.45	.58	.50	.45	.56	.49	.44	.54	.48	.44	.53	.48	.43	.42
8.0	.54	.46	.41	.53	.46	.40	.51	.45	.40	.50	.44	.40	.49	.43	.39	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.46	.40	.36	.45	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.34	.44	.38	.33	.43	.37	.33	.42	.37	.33	.31

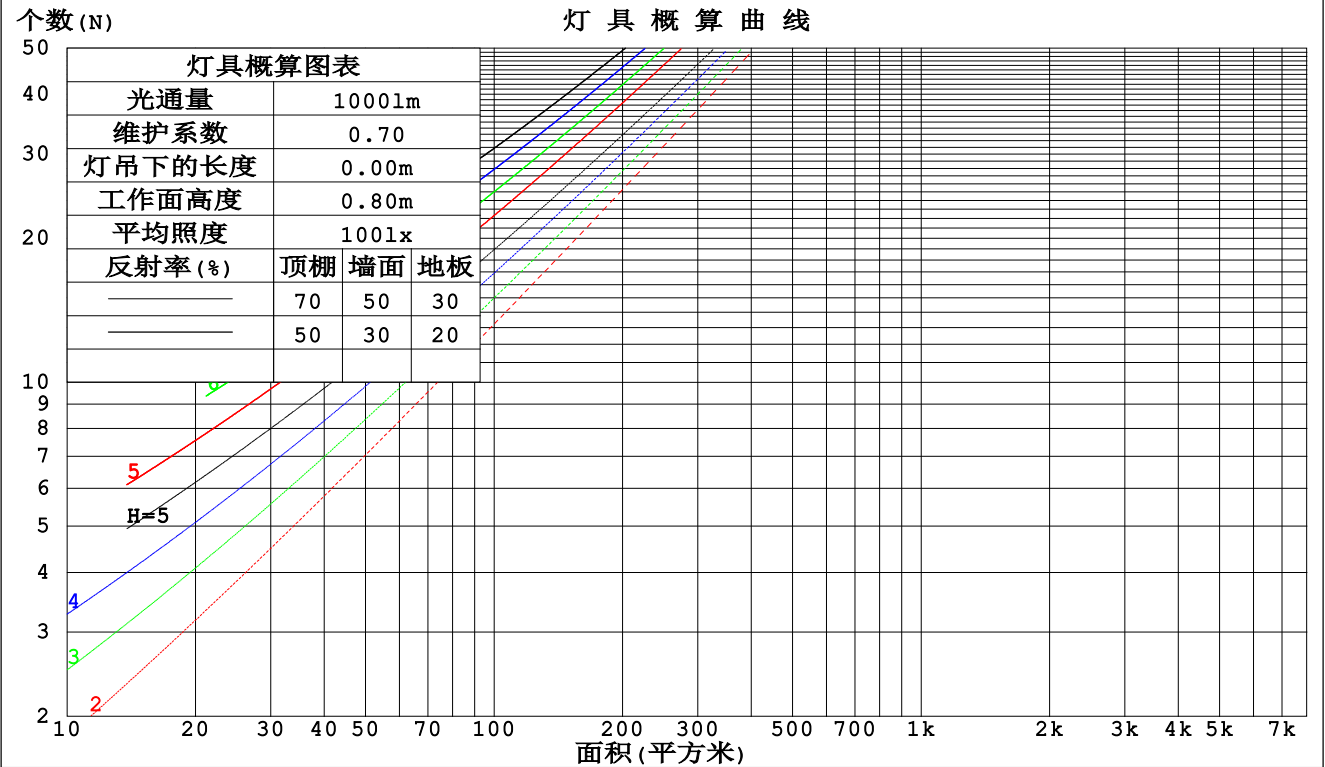

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-07-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz 实检光通:33570.6x1 lm					
灯具名称:			灯具类型:		灯具重量:
灯具规格:			外型尺寸:		测试编号:
制造厂商: EVERFINE			发光口面:		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.243	.138	.044	.235	.134	.043	.221	.127	.041	.208	.120	.039	.196	.114	.037	
2.0	.236	.129	.040	.229	.126	.039	.217	.120	.037	.205	.115	.036	.194	.110	.035	
3.0	.224	.119	.036	.218	.117	.035	.207	.112	.034	.197	.108	.033	.188	.104	.032	
4.0	.211	.110	.032	.206	.108	.032	.197	.104	.031	.187	.101	.030	.179	.097	.030	
5.0	.199	.102	.029	.195	.100	.029	.186	.097	.029	.178	.094	.028	.170	.091	.027	
6.0	.188	.094	.027	.184	.093	.027	.176	.090	.026	.169	.088	.026	.162	.085	.025	
7.0	.177	.088	.025	.174	.086	.025	.167	.084	.024	.160	.082	.024	.154	.080	.023	
8.0	.167	.082	.023	.164	.081	.023	.158	.079	.023	.152	.077	.022	.146	.075	.022	
9.0	.158	.077	.021	.155	.076	.021	.150	.074	.021	.144	.072	.021	.139	.071	.020	
10.0	.150	.072	.020	.148	.071	.020	.142	.070	.020	.137	.068	.019	.133	.067	.019	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.209	.209	.209	.178	.178	.178	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.194	.175	.158	.166	.150	.136	.114	.103	.094	.065	.060	.055	.021	.019	.018	
2.0	.183	.151	.123	.157	.130	.107	.108	.090	.074	.062	.052	.044	.020	.017	.014	
3.0	.174	.133	.100	.149	.114	.086	.103	.080	.061	.059	.046	.036	.019	.015	.012	
4.0	.166	.119	.083	.143	.103	.072	.098	.072	.051	.057	.042	.030	.018	.014	.010	
5.0	.159	.108	.071	.137	.094	.061	.094	.065	.043	.055	.038	.026	.018	.013	.008	
6.0	.152	.100	.062	.131	.086	.054	.090	.060	.038	.052	.036	.023	.017	.012	.007	
7.0	.146	.093	.055	.126	.080	.048	.087	.056	.034	.050	.033	.020	.016	.011	.007	
8.0	.140	.087	.050	.121	.075	.044	.084	.053	.031	.049	.031	.018	.016	.010	.006	
9.0	.135	.082	.046	.116	.071	.040	.081	.050	.029	.047	.030	.017	.015	.010	.006	
10.0	.130	.078	.043	.112	.067	.037	.078	.047	.027	.045	.028	.016	.015	.009	.005	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-07-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz 实检光通:33570.6x1 lm												
灯具名称:			灯具类型:			灯具重量:						
灯具规格:			外型尺寸:			测试编号:						
制造厂商: EVERFINE			发光口面:			遮光角:						
反射比:	天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
	墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
	工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
房间尺寸		交叉(Viewed crosswise)					向前(Viewed endwise)					
x = 2H y = 2H	2H	18.7	20.0	19.0	20.2	20.4	15.1	16.3	15.3	16.6	16.8	
	3H	19.3	20.5	19.7	20.8	21.1	14.9	16.1	15.3	16.4	16.6	
	4H	19.4	20.5	19.7	20.8	21.1	14.9	16.0	15.2	16.3	16.6	
	6H	19.3	20.4	19.7	20.7	21.0	14.8	15.9	15.2	16.2	16.5	
	8H	19.3	20.3	19.7	20.6	20.9	14.8	15.8	15.2	16.1	16.4	
	12H	19.3	20.2	19.6	20.5	20.9	14.8	15.7	15.1	16.0	16.4	
	4H	2H	18.5	19.6	18.8	19.9	20.1	15.0	16.1	15.4	16.4	16.7
		3H	19.2	20.1	19.6	20.5	20.8	14.9	15.9	15.3	16.2	16.6
		4H	19.3	20.1	19.7	20.5	20.9	14.9	15.8	15.3	16.1	16.5
		6H	19.2	20.0	19.7	20.4	20.8	14.9	15.7	15.3	16.0	16.4
		8H	19.2	19.9	19.7	20.3	20.8	14.9	15.6	15.3	16.0	16.4
4H	2H	18.5	19.6	18.8	19.9	20.1	15.0	16.1	15.4	16.4	16.7	
	3H	19.2	20.1	19.6	20.5	20.8	14.9	15.9	15.3	16.2	16.6	
	4H	19.3	20.1	19.7	20.5	20.9	14.9	15.8	15.3	16.1	16.5	
	6H	19.2	20.0	19.7	20.4	20.8	14.9	15.7	15.3	16.0	16.4	
	8H	19.2	19.9	19.7	20.3	20.8	14.9	15.6	15.3	16.0	16.4	
	12H	19.2	19.8	19.6	20.3	20.7	14.9	15.5	15.3	16.0	16.4	
	8H	4H	19.1	19.8	19.6	20.2	20.7	14.9	15.6	15.3	16.0	16.4
		6H	19.1	19.7	19.6	20.2	20.6	14.9	15.5	15.4	15.9	16.4
		8H	19.1	19.6	19.6	20.1	20.6	14.9	15.4	15.4	15.9	16.4
		12H	19.1	19.5	19.6	20.0	20.6	15.0	15.4	15.5	15.9	16.4
	12H	4H	19.1	19.7	19.5	20.2	20.6	14.8	15.5	15.3	15.9	16.4
6H		19.1	19.6	19.6	20.1	20.6	14.9	15.4	15.4	15.8	16.3	
8H		19.1	19.5	19.6	20.0	20.5	14.9	15.3	15.4	15.8	16.3	
不同间隔布灯时,观察者位置引起的UGR变化:												
S = 1.0H		+ 0.5 / - 0.8					+ 2.2 / - 4.7					
1.5H		+ 0.8 / - 1.3					+ 0.7 / - 3.1					
2.0H		+ 2.3 / - 5.4					+ 3.9 / - 6.0					

依据CIE Pub.117计算, 33571lm光源光通表格中的数据需要进行修正(81log(F/F0) = 12.2)。
出光口面积: 0.1 m2

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-07-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz 实检光通:33570.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	66	56	50	65	56	50	64	55	50	44
0.80	76	66	60	75	66	60	73	65	59	53
1.00	84	75	69	83	74	69	81	75	68	62
1.25	90	82	76	89	81	76	86	80	75	69
1.50	95	87	81	93	86	81	90	84	80	73
2.00	100	94	89	98	92	88	95	90	86	79
2.50	103	97	92	101	96	91	97	93	89	81
3.00	106	101	96	104	99	95	100	96	92	84
4.00	109	104	101	106	103	99	102	99	96	87
5.00	111	107	104	108	105	102	103	101	99	89
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-07-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz 实检光通:33570.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

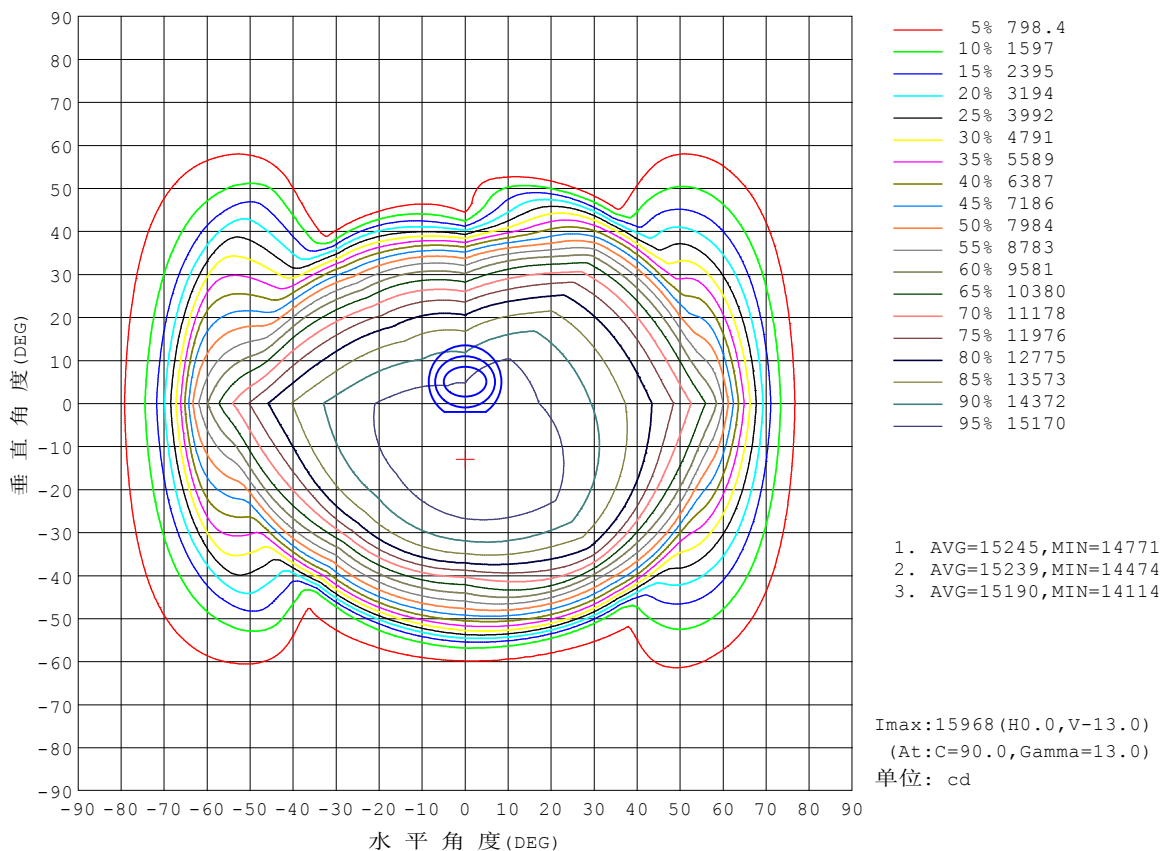


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-07-15

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz 实检光通:33570.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

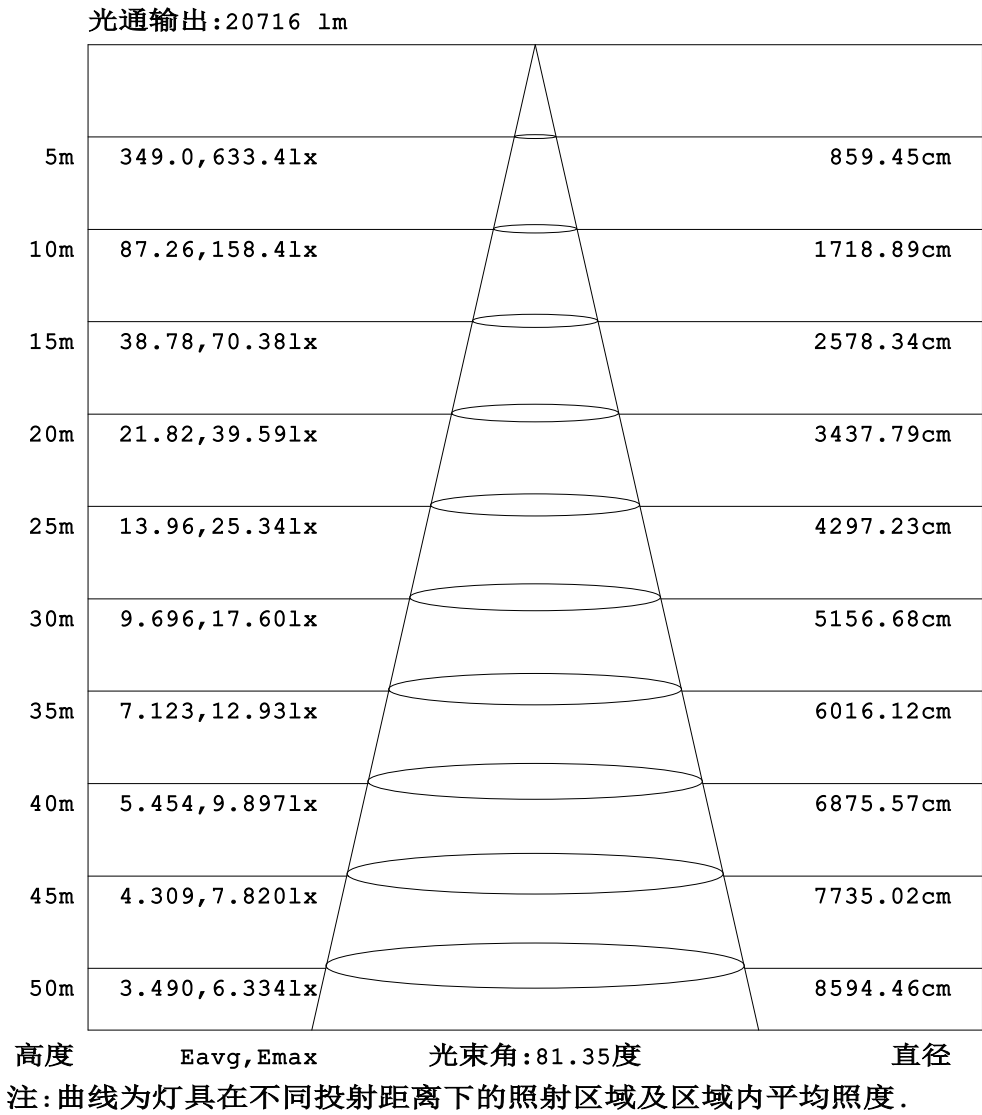


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-07-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz 实检光通:33570.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

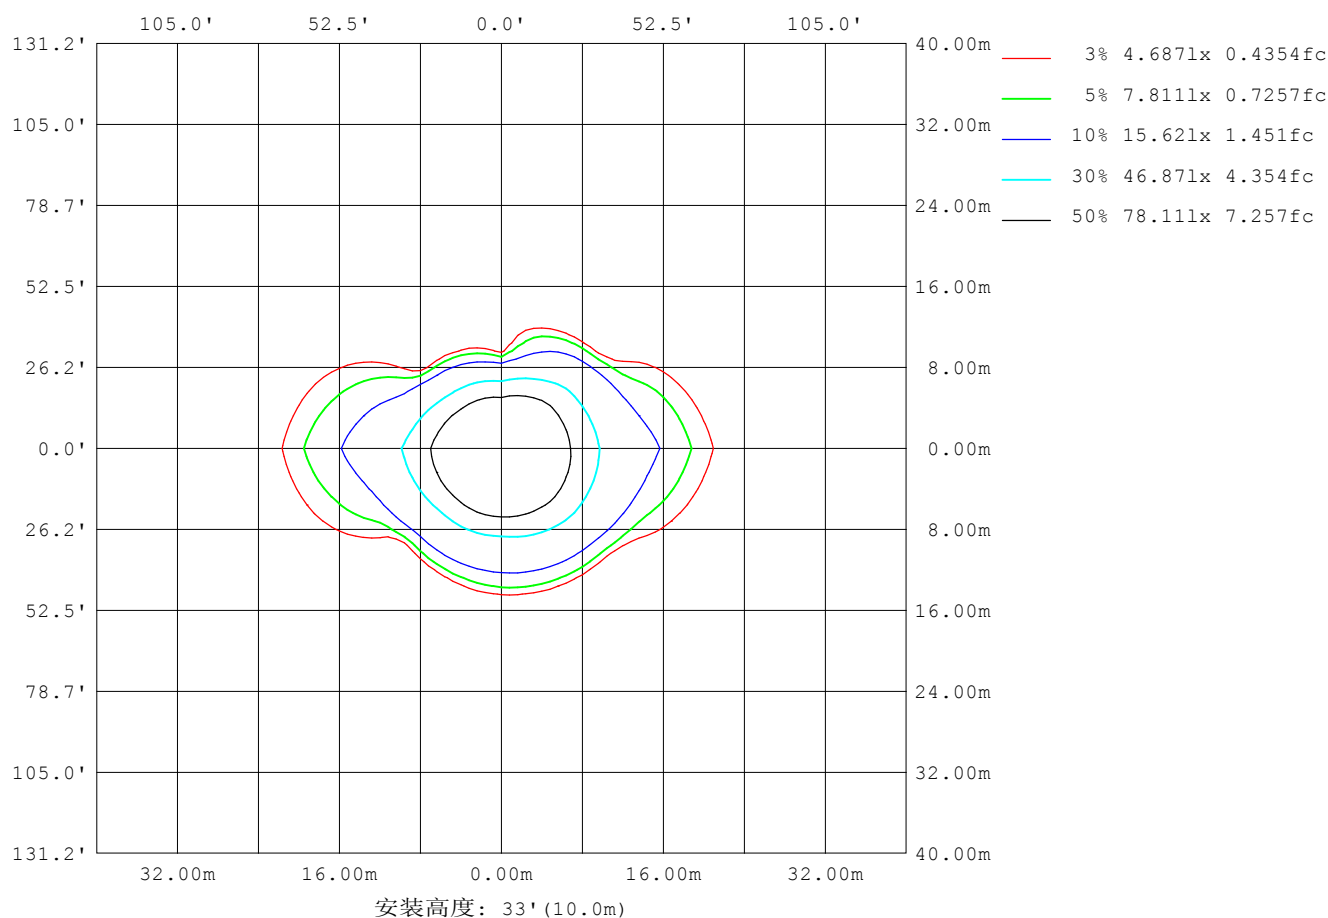

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-07-15

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz 实检光通:33570.6x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	143071
L横 (75) av	50446
L横 (85) av	27148
L纵 (65) av	9009
L纵 (75) av	7821
L纵 (85) av	12693
L45 (65) av	10721
L45 (75) av	9297
L45 (85) av	12834

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-07-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

平面照度曲线

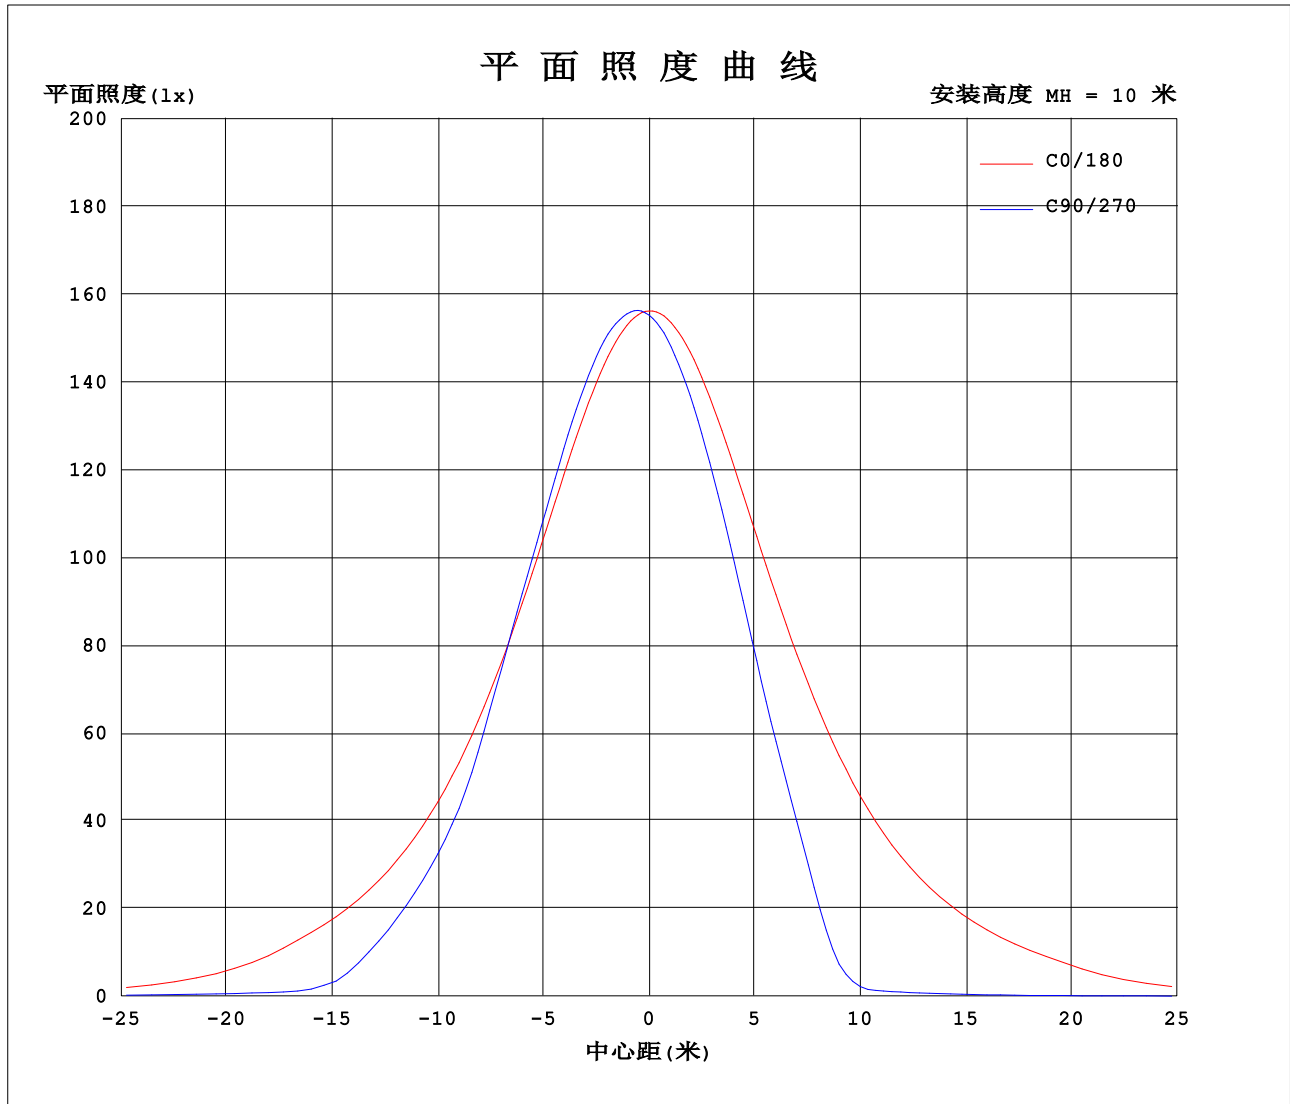

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-07-15

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:218.41V I:0.9274A P:199.02W PF:0.9826 Freq:49.99Hz 实检光通:33570.6x1 lm								
灯具名称:				灯具类型:				灯具重量:
灯具规格:				外型尺寸:				测试编号:
制造厂商: EVERFINE				发光口面:				遮光角:

表--1									单位: ×10cd									
C (DEG) γ (DEG)		0	45	90	135	180	225	270	315									
0	1562	1552	1552	1582	1562	1552	1552	1552	1582									
5	1557	1571	1578	1589	1562	1522	1514	1568										
10	1545	1581	1593	1584	1555	1482	1460	1546										
15	1526	1584	1595	1569	1541	1428	1387	1514										
20	1502	1578	1578	1542	1521	1358	1289	1472										
25	1471	1557	1537	1494	1495	1265	1151	1415										
30	1431	1522	1475	1429	1461	1137	965	1343										
35	1382	1460	1355	1327	1419	959	725	1248										
40	1324	1369	1136	1138	1362	723	335	1116										
45	1254	1195	920	880	1291	352	63.5	909										
50	1171	855	673	555	1203	51.7	36.7	561										
55	1061	412	279	84.1	1095	35.1	27.4	67.7										
60	878	82.2	78.2	69.2	954	27.9	20.4	41.2										
65	553	69.2	62.0	59.3	656	19.7	14.1	33.1										
70	286	57.8	45.6	44.7	313	14.5	10.9	24.2										
75	114	39.7	32.0	30.1	148	9.83	8.49	16.7										
80	39.5	26.9	20.9	18.3	70.8	7.21	6.15	11.1										
85	19.0	16.8	15.9	13.0	28.3	6.03	6.18	8.87										
90	13.9	12.7	12.1	9.91	9.83	6.47	6.10	8.27										
95	12.4	10.5	8.57	8.80	7.48	6.57	6.58	8.33										
100	11.9	9.57	7.56	8.41	7.97	7.36	7.26	8.66										
105	11.9	8.90	6.95	8.46	8.80	8.23	8.03	9.32										
110	12.4	9.03	6.74	8.75	9.82	9.17	8.84	9.78										
115	13.1	9.90	7.10	9.24	11.1	10.1	9.70	11.1										
120	14.2	10.8	7.71	9.84	12.5	11.0	10.8	12.8										
125	15.6	11.9	8.49	10.6	14.0	12.1	12.5	14.6										
130	17.0	13.4	9.45	11.5	15.4	13.4	14.3	16.0										
135	18.2	15.1	10.5	12.5	16.8	14.6	15.8	17.3										
140	19.2	16.5	11.7	13.8	18.0	15.7	17.3	18.4										
145	20.2	17.7	13.2	15.1	19.3	17.1	18.6	19.3										
150	21.1	18.8	14.9	16.6	20.6	18.6	19.7	20.3										
155	22.0	19.9	16.5	18.0	21.7	20.5	21.0	21.2										
160	22.9	20.9	18.0	19.4	22.6	22.0	22.4	22.2										
165	23.5	21.9	19.5	20.7	23.4	23.1	23.4	22.9										
170	24.0	22.8	20.9	21.8	24.0	23.7	23.8	23.3										
175	24.4	23.6	22.3	22.8	24.4	24.0	23.9	23.6										
180	24.5	24.1	23.3	23.4	24.6	24.0	23.3	23.5										

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-07-15

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注: