


室内灯具光度数据

实测参数: U:218.53V I:1.0976A P:232.86W PF:0.9708 Freq:0Hz 实检光通:35805.1x1 lm					
灯具名称:		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面:		遮光角:	

光源数据		光度数据				光效: 153.76 lm/W
型号		峰值光强(cd)	16492	S/MH(C0/180)	1.46	
标称功率(W)	240	灯具效率(%)	100.0	S/MH(C90/270)	1.20	
额定电源电压(V)	220	总光通量(lm)	35805	η UP,DN(C0-180)	1.1,43.6	
额定光通量(lm)	35805.1	CIE分类	直接	η UP,DN(C180-360)	1.0,54.2	
灯具内光源数(只)	1	上射光通比(%)	2.1	CIBSE SHR NOM	1.25	
实测电源电压(V)	220	下射光通比(%)	97.9	CIBSE SHR MAX	1.25	

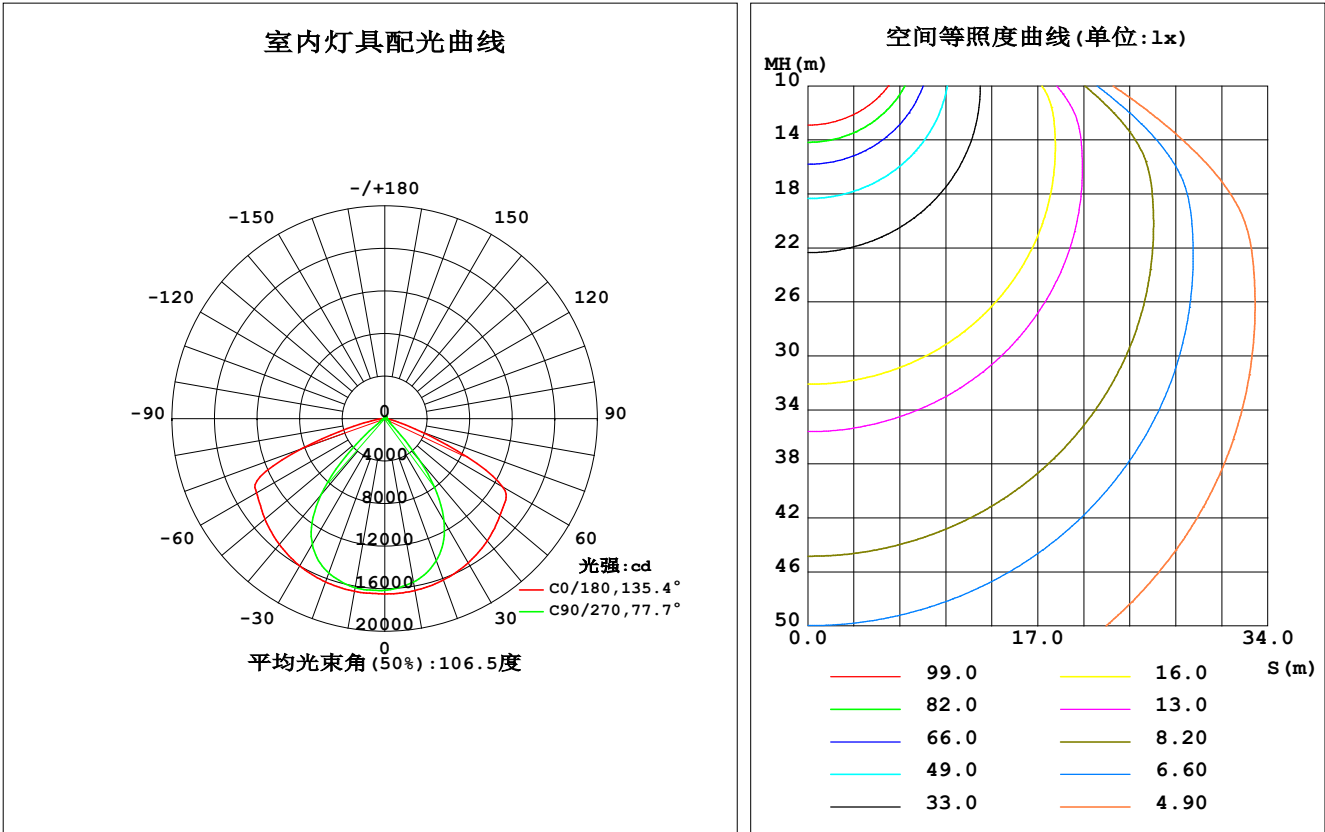

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	1641	1595	1560	1562	1649	1633	1614	1607	0- 10	1542	1542	4.31, 4.31
20	1615	1517	1420	1470	1633	1590	1545	1571	10- 20	4472	6014	16.8, 16.8
30	1566	1337	1117	1278	1599	1493	1365	1478	20- 30	6846	12860	35.9, 35.9
40	1500	903.4	498.2	833.6	1544	1268	932.7	1259	30- 40	7935	20795	58.1, 58.1
50	1417	101.8	69.91	105.4	1471	604.2	237.1	557.8	40- 50	6374	27169	75.9, 75.9
60	1278	54.13	44.38	53.24	1393	60.15	49.93	58.24	50- 60	3918	31087	86.8, 86.8
70	374.0	30.91	23.60	31.62	832.5	35.56	26.43	33.90	60- 70	2866	33953	94.8, 94.8
80	45.99	14.88	13.47	15.35	128.7	14.03	11.49	12.38	70- 80	912.7	34866	97.4, 97.4
90	14.26	8.771	7.115	8.890	10.16	6.186	5.733	6.353	80- 90	179.4	35045	97.9, 97.9
100	12.04	8.698	6.159	7.527	7.796	6.074	5.477	7.016	90-100	82.75	35128	98.1, 98.1
110	12.02	10.53	7.145	8.541	9.538	7.334	6.687	8.783	100-110	86.06	35214	98.3, 98.3
120	12.90	13.15	9.263	10.08	11.68	8.872	8.211	11.07	110-120	96.12	35310	98.6, 98.6
130	13.98	16.77	11.71	12.13	14.00	10.52	10.10	14.70	120-130	105.6	35416	98.9, 98.9
140	16.33	18.96	14.47	14.70	16.21	12.57	13.29	17.64	130-140	109.9	35526	99.2, 99.2
150	19.37	20.62	18.29	17.70	18.68	15.00	16.55	19.83	140-150	105.8	35631	99.5, 99.5
160	21.26	22.26	21.09	20.61	21.14	18.13	19.37	21.81	150-160	89.87	35721	99.8, 99.8
170	22.55	23.43	23.36	22.92	22.67	21.47	22.58	23.50	160-170	61.55	35783	99.9, 99.9
180	23.09	23.44	24.42	24.19	23.29	23.28	24.54	24.10	170-180	22.21	35805	100, 100
单位:°	光强:×10cd									单位:lm		

锥面光通量(90度)：24369 lm

%lum = 68.1%
%lamp = 68.1%

锥面光通量(120度)：31087 lm


%lum = 86.8%
%lamp = 86.8%

C角度范围： 0度 - 360度
C角度间隔：45.0度
测试速度：快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统：远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注：

灯具亮度限制曲线

实测参数: U:218.53V I:1.0976A P:232.86W PF:0.9708 Freq:0Hz 实检光通:35805.1x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

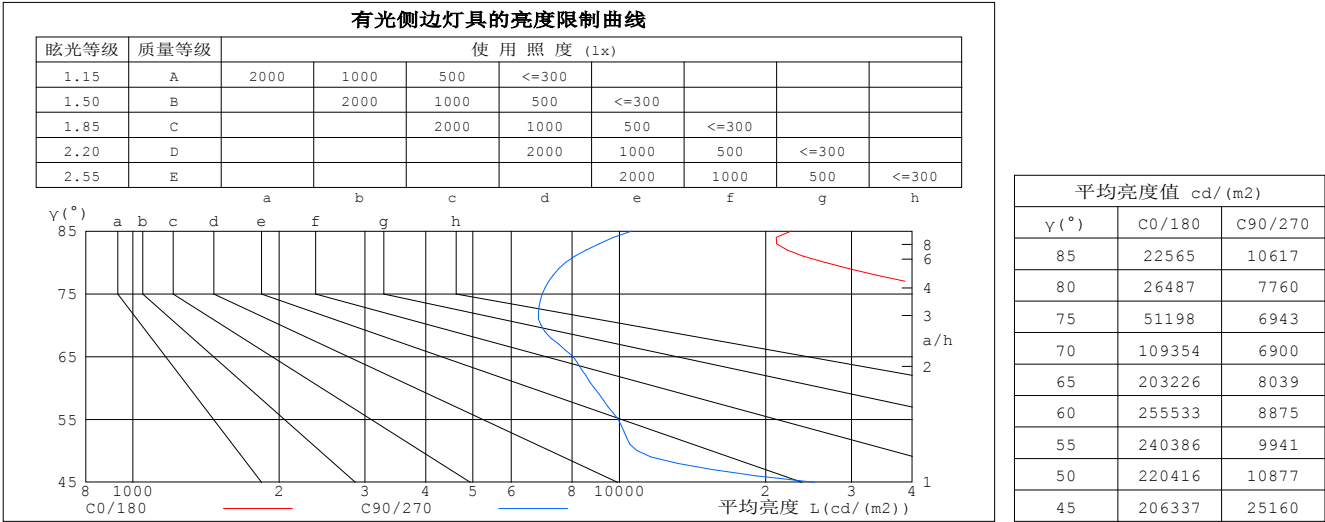


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:218.53V I:1.0976A P:232.86W PF:0.9708 Freq:0Hz 实检光通:35805.1x1 lm											
灯具名称:				灯具类型:				灯具重量:			
灯具规格:				外型尺寸:				测试编号:			
制造厂商: EVERFINE				发光口面:				遮光角:			

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.06	1.03	.00	1.04	1.01	.98	.99	.97	.94	.95	.93	.91	.91	.90	.88	.86
2.0	.95	.89	.84	.93	.88	.83	.89	.85	.81	.86	.82	.79	.82	.79	.77	.75
3.0	.85	.78	.72	.83	.77	.71	.80	.74	.70	.77	.72	.69	.74	.70	.67	.65
4.0	.76	.69	.63	.75	.68	.62	.72	.66	.61	.70	.64	.60	.67	.63	.59	.57
5.0	.69	.61	.55	.68	.60	.55	.66	.59	.54	.63	.58	.53	.61	.57	.53	.51
6.0	.63	.55	.49	.62	.54	.49	.60	.53	.48	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.44	.56	.49	.44	.55	.48	.43	.53	.47	.43	.52	.46	.42	.40
8.0	.53	.45	.39	.52	.44	.39	.50	.44	.39	.49	.43	.39	.48	.42	.38	.37
9.0	.49	.41	.36	.48	.41	.36	.47	.40	.35	.46	.39	.35	.44	.39	.35	.33
10.0	.45	.38	.33	.44	.37	.33	.43	.37	.32	.42	.36	.32	.41	.36	.32	.30

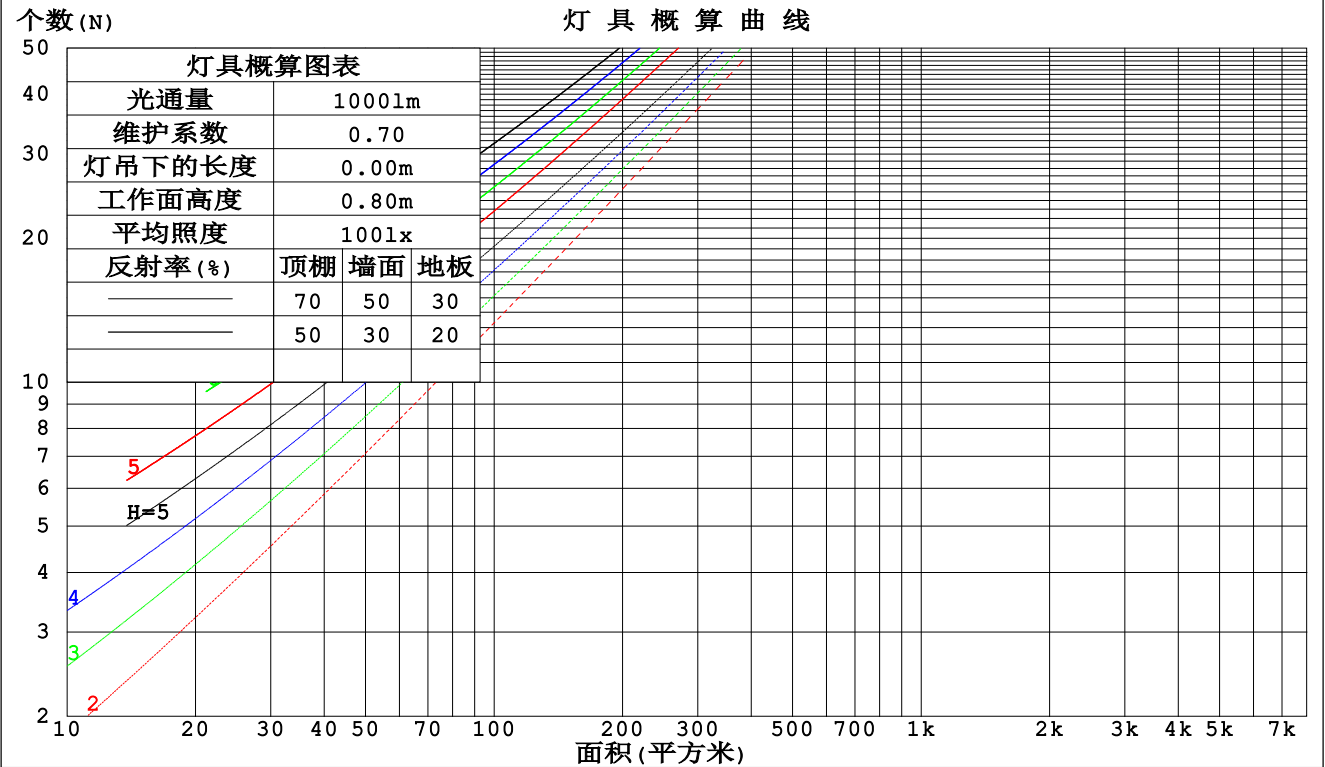

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:218.53V I:1.0976A P:232.86W PF:0.9708 Freq:0Hz 实检光通:35805.1x1 lm					
灯具名称:		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面:		遮光角:	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.253	.144	.046	.246	.140	.044	.231	.133	.042	.218	.126	.040	.206	.120	.039	
2.0	.245	.134	.041	.238	.131	.040	.226	.126	.039	.214	.120	.038	.204	.115	.036	
3.0	.231	.123	.037	.226	.121	.036	.215	.116	.035	.205	.112	.034	.195	.108	.033	
4.0	.217	.113	.033	.212	.111	.033	.203	.107	.032	.194	.104	.031	.185	.101	.031	
5.0	.204	.104	.030	.200	.102	.030	.191	.099	.029	.183	.096	.029	.175	.094	.028	
6.0	.192	.096	.028	.188	.095	.027	.180	.092	.027	.173	.090	.026	.166	.087	.026	
7.0	.180	.089	.025	.177	.088	.025	.170	.086	.025	.163	.084	.024	.157	.082	.024	
8.0	.170	.083	.023	.167	.082	.023	.160	.080	.023	.154	.078	.023	.149	.076	.022	
9.0	.161	.078	.022	.158	.077	.022	.152	.075	.021	.147	.073	.021	.142	.072	.021	
10.0	.152	.073	.020	.149	.072	.020	.144	.071	.020	.139	.069	.020	.135	.068	.019	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.207	.207	.207	.177	.177	.177	.121	.121	.121	.069	.069	.069	.022	.022	.022	
1.0	.193	.173	.155	.165	.148	.134	.113	.102	.092	.065	.059	.054	.021	.019	.017	
2.0	.182	.149	.120	.156	.128	.104	.107	.088	.072	.062	.051	.042	.020	.017	.014	
3.0	.174	.131	.096	.149	.113	.083	.102	.078	.059	.059	.046	.034	.019	.015	.011	
4.0	.166	.117	.080	.142	.101	.069	.098	.070	.049	.057	.041	.029	.018	.013	.009	
5.0	.158	.106	.068	.136	.092	.059	.094	.064	.042	.054	.038	.025	.017	.012	.008	
6.0	.151	.098	.059	.130	.085	.051	.090	.059	.036	.052	.035	.022	.017	.011	.007	
7.0	.145	.091	.052	.125	.079	.046	.086	.055	.032	.050	.032	.019	.016	.011	.006	
8.0	.139	.085	.047	.120	.074	.041	.083	.052	.029	.048	.030	.017	.016	.010	.006	
9.0	.134	.080	.044	.115	.069	.038	.080	.049	.027	.046	.029	.016	.015	.009	.005	
10.0	.128	.076	.040	.111	.066	.035	.077	.046	.025	.045	.027	.015	.015	.009	.005	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:218.53V I:1.0976A P:232.86W PF:0.9708 Freq:0Hz 实检光通:35805.1x1 lm										
灯具名称:			灯具类型:			灯具重量:				
灯具规格:			外型尺寸:			测试编号:				
制造厂商: EVERFINE			发光口面:			遮光角:				
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	19.2	20.6	19.5	20.8	21.0	8.3	9.6	8.6	9.8	10.1
3H	20.2	21.4	20.5	21.7	22.0	8.2	9.4	8.5	9.7	9.9
4H	20.3	21.4	20.6	21.7	22.0	8.2	9.3	8.5	9.6	9.9
6H	20.2	21.3	20.6	21.6	21.9	8.2	9.3	8.5	9.6	9.9
8H	20.2	21.2	20.5	21.5	21.8	8.2	9.2	8.5	9.5	9.9
12H	20.1	21.1	20.5	21.4	21.8	8.2	9.2	8.6	9.5	9.8
4H 2H	19.0	20.1	19.3	20.4	20.7	9.4	10.6	9.8	10.9	11.1
3H	20.0	21.0	20.4	21.3	21.7	9.4	10.4	9.8	10.7	11.0
4H	20.1	21.0	20.5	21.3	21.7	9.4	10.3	9.8	10.6	11.0
6H	20.0	20.8	20.5	21.2	21.6	9.4	10.2	9.8	10.6	11.0
8H	20.0	20.7	20.5	21.1	21.6	9.4	10.1	9.9	10.5	11.0
12H	20.0	20.7	20.4	21.1	21.5	9.4	10.1	9.9	10.5	11.0
8H 4H	19.9	20.7	20.4	21.1	21.5	9.6	10.3	10.1	10.7	11.2
6H	19.9	20.5	20.4	21.0	21.4	9.7	10.3	10.1	10.7	11.2
8H	19.9	20.4	20.4	20.9	21.4	9.7	10.3	10.2	10.7	11.2
12H	19.9	20.3	20.4	20.8	21.3	9.8	10.3	10.3	10.7	11.3
12H 4H	19.9	20.6	20.3	21.0	21.4	9.6	10.3	10.1	10.7	11.1
6H	19.9	20.4	20.4	20.9	21.4	9.7	10.2	10.2	10.7	11.2
8H	19.9	20.3	20.4	20.8	21.3	9.8	10.2	10.3	10.7	11.2
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 0.7 / - 0.7					+ 2.3 / - 4.6				
1.5H	+ 1.9 / - 2.6					+ 3.3 / - 3.5				
2.0H	+ 3.5 / - 7.0					+ 3.4 / - 2.3				

依据CIE Pub.117计算, 35805lm光源光通表格中的数据需要进行修正(8log(F/F0) = 12.4)。
出光口面积: 0.1 m2

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:218.53V I:1.0976A P:232.86W PF:0.9708 Freq:0Hz 实检光通:35805.1x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	65	55	49	65	55	49	64	55	49	43
0.80	75	65	59	74	65	59	72	64	58	52
1.00	83	74	67	82	73	67	79	74	66	60
1.25	89	81	75	88	80	74	85	78	73	67
1.50	94	86	80	92	85	79	89	83	78	71
2.00	99	92	87	98	91	86	94	89	85	77
2.50	103	96	91	101	95	90	97	92	88	80
3.00	105	100	95	103	98	94	99	95	92	83
4.00	109	104	100	106	102	99	102	99	96	87
5.00	111	107	103	108	105	102	103	101	98	89
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHR _{NOM} = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:218.53V I:1.0976A P:232.86W PF:0.9708 Freq:0Hz 实检光通:35805.1x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

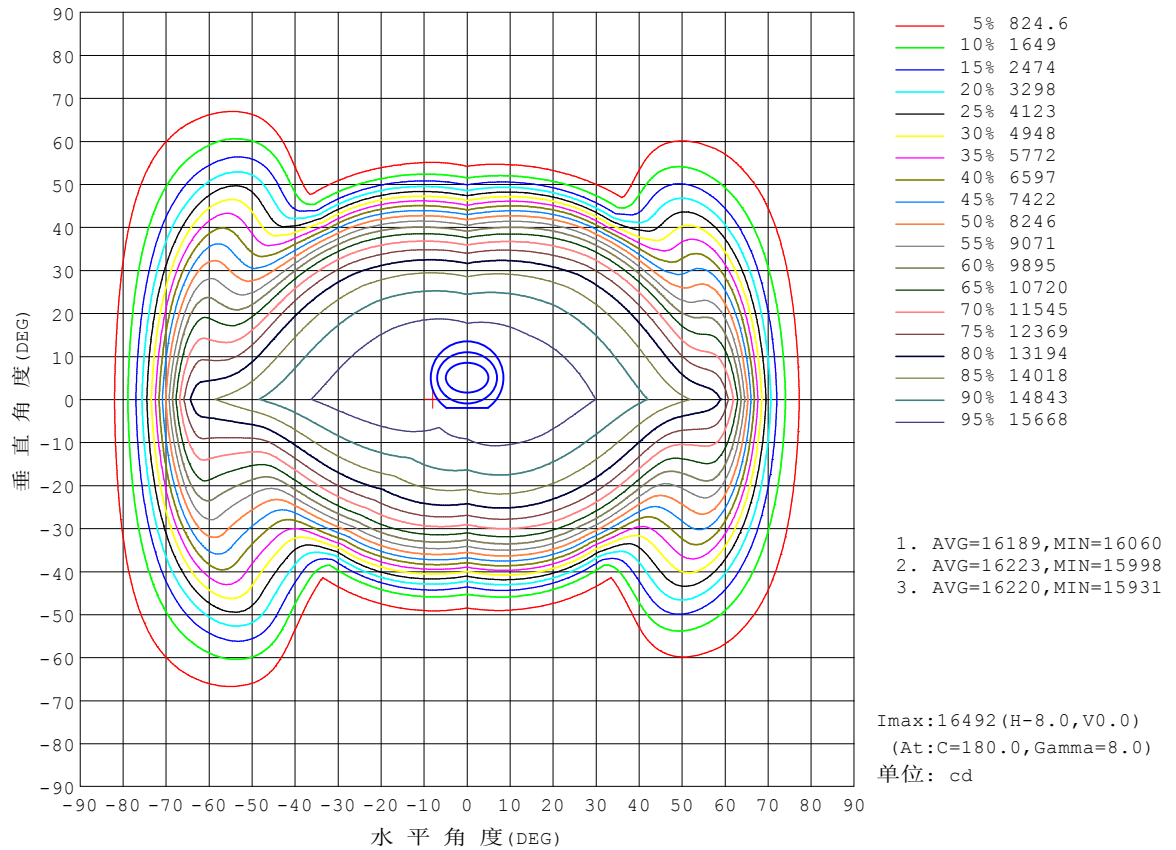


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:218.53V I:1.0976A P:232.86W PF:0.9708 Freq:0Hz 实检光通:35805.1x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

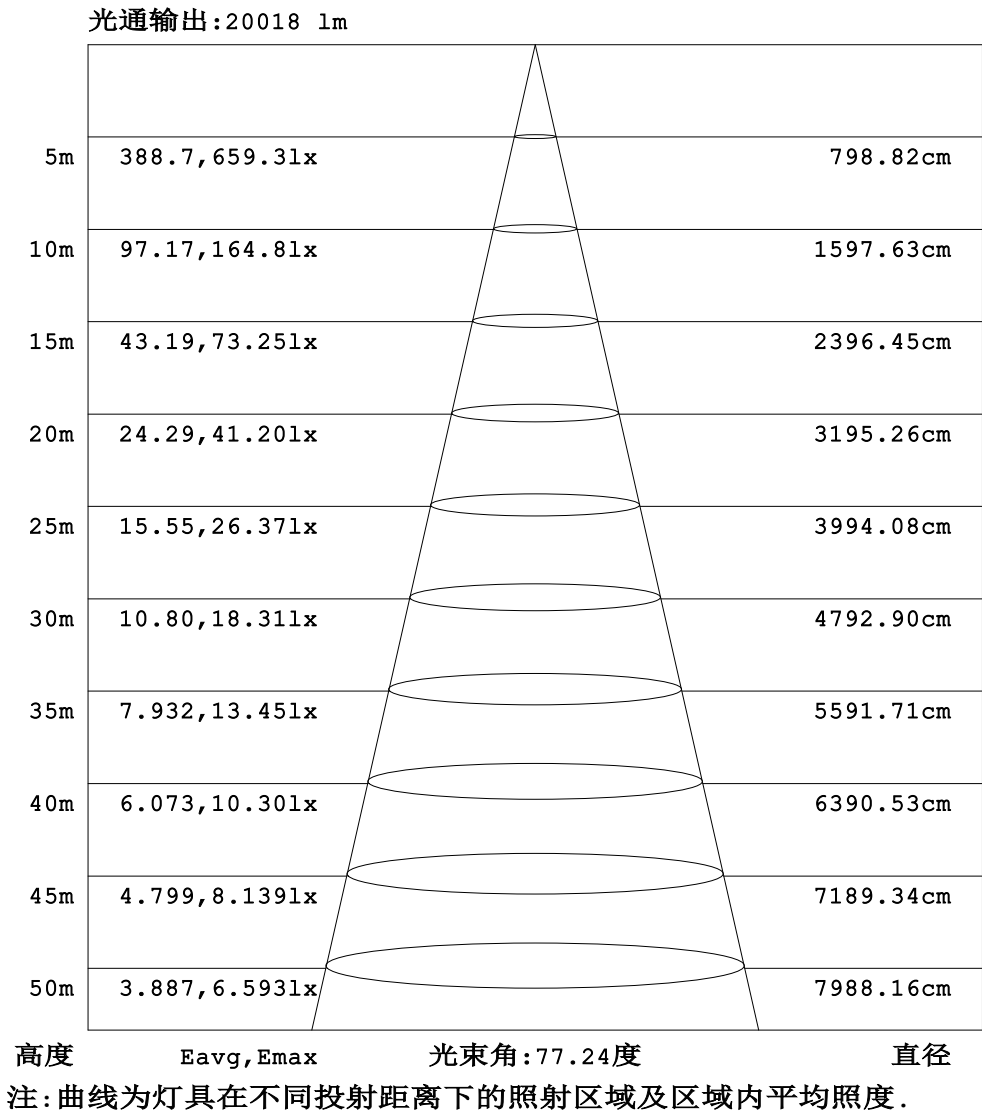


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:218.53V I:1.0976A P:232.86W PF:0.9708 Freq:0Hz 实检光通:35805.1x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

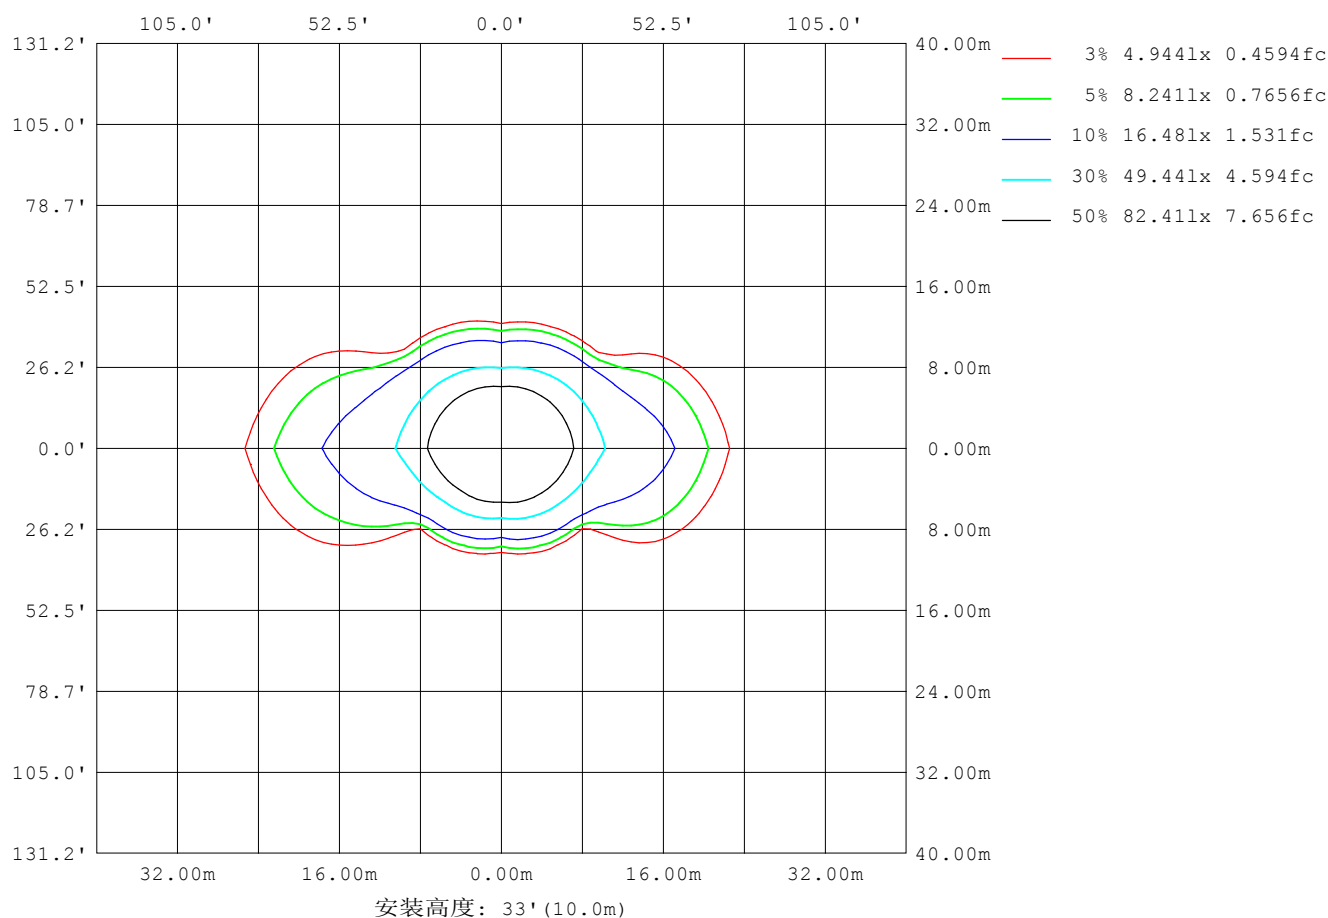

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-23

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:218.53V I:1.0976A P:232.86W PF:0.9708 Freq:0Hz 实检光通:35805.1x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	254383
L横 (75) av	97154
L横 (85) av	34950
L纵 (65) av	8497
L纵 (75) av	6500
L纵 (85) av	10240
L45 (65) av	10646
L45 (75) av	8583
L45 (85) av	11333

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

平面照度曲线

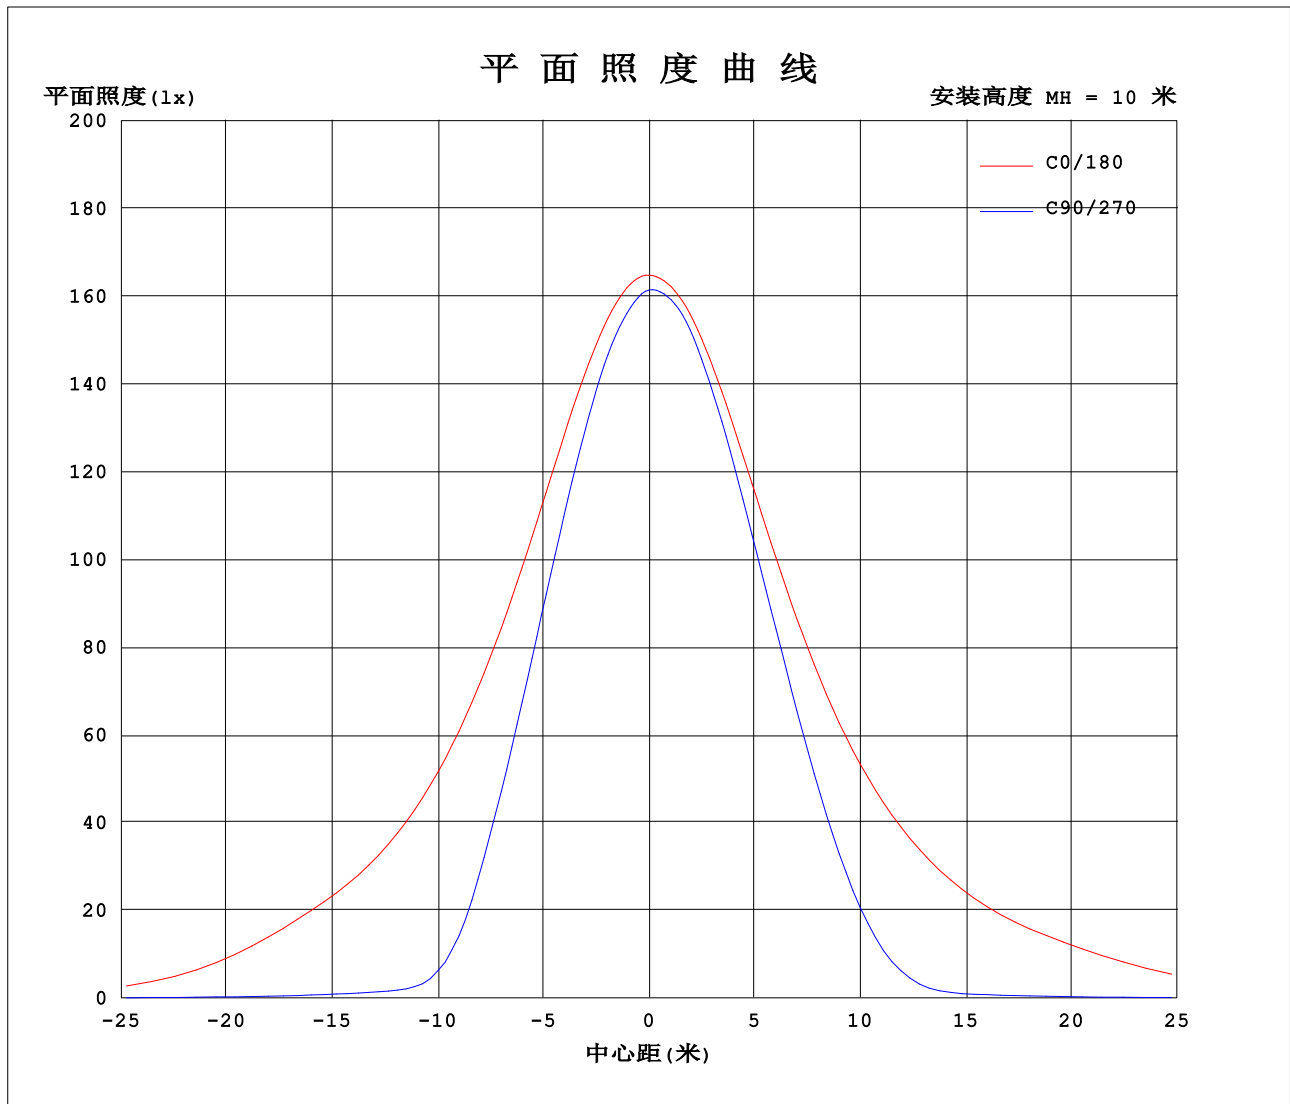

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-23

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:218.53V I:1.0976A P:232.86W PF:0.9708 Freq:0Hz 实检光通:35805.1x1 lm								
灯具名称:				灯具类型:				灯具重量:
灯具规格:				外型尺寸:				测试编号:
制造厂商: EVERFINE				发光口面:				遮光角:

表--1									单位: ×10cd									
γ (DEG) \ C (DEG)	0	45	90	135	180	225	270	315										
0	1648	1631	1615	1602	1648	1631	1615	1602										
5	1647	1620	1593	1585	1648	1631	1618	1608										
10	1641	1595	1560	1562	1649	1633	1614	1607										
15	1630	1564	1505	1526	1643	1618	1587	1596										
20	1615	1517	1420	1470	1633	1590	1545	1571										
25	1593	1443	1297	1391	1619	1551	1474	1533										
30	1566	1337	1117	1278	1599	1493	1365	1478										
35	1536	1178	859	1108	1574	1405	1193	1393										
40	1500	903	498	834	1544	1268	933	1259										
45	1459	451	178	431	1510	1027	585	1018										
50	1417	102	69.9	105	1471	604	237	558										
55	1379	65.0	57.0	64.1	1428	168	70.7	122										
60	1278	54.1	44.4	53.2	1393	60.1	49.9	58.2										
65	859	42.5	34.0	42.0	1291	48.3	37.8	47.1										
70	374	30.9	23.6	31.6	833	35.6	26.4	33.9										
75	133	20.7	18.0	21.5	370	24.1	15.7	22.5										
80	46.0	14.9	13.5	15.3	129	14.0	11.5	12.4										
85	19.7	11.1	9.25	11.3	41.3	8.70	8.60	8.36										
90	14.3	8.77	7.11	8.89	10.2	6.19	5.73	6.35										
95	12.8	8.24	6.41	7.47	7.35	5.65	5.16	6.41										
100	12.0	8.70	6.16	7.53	7.80	6.07	5.48	7.02										
105	11.9	9.51	6.42	7.96	8.58	6.65	6.01	7.84										
110	12.0	10.5	7.14	8.54	9.54	7.33	6.69	8.78										
115	12.4	11.7	8.13	9.24	10.5	8.08	7.42	9.85										
120	12.9	13.1	9.26	10.1	11.7	8.87	8.21	11.1										
125	13.4	14.9	10.5	11.0	12.9	9.68	9.08	12.8										
130	14.0	16.8	11.7	12.1	14.0	10.5	10.1	14.7										
135	14.9	18.0	13.0	13.4	15.1	11.5	11.5	16.3										
140	16.3	19.0	14.5	14.7	16.2	12.6	13.3	17.6										
145	17.9	19.8	16.3	16.1	17.4	13.7	15.0	18.8										
150	19.4	20.6	18.3	17.7	18.7	15.0	16.6	19.8										
155	20.4	21.5	19.8	19.2	19.9	16.5	17.9	20.8										
160	21.3	22.3	21.1	20.6	21.1	18.1	19.4	21.8										
165	22.0	23.0	22.3	21.9	22.1	20.0	20.9	22.8										
170	22.6	23.4	23.4	22.9	22.7	21.5	22.6	23.5										
175	23.0	23.6	24.2	23.7	23.1	22.6	23.9	24.0										
180	23.1	23.4	24.4	24.2	23.3	23.3	24.5	24.1										

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注: