


室内灯具光度数据

实测参数: U:218.5V I:1.111A P:238.7W PF:0.971 Freq:49.99Hz 实检光通:43794.3x1 lm					
灯具名称:		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面:		遮光角:	

光源数据		光度数据				光效: 183.45 lm/W
型号		峰值光强(cd)	16932	S/MH(C0/180)	1.46	
标称功率(W)	240	灯具效率(%)	100.0	S/MH(C90/270)	1.21	
额定电源电压(V)	220	总光通量(lm)	43794	η UP,DN(C0-180)	0.9,44.8	
额定光通量(lm)	43794.3	CIE分类	直接	η UP,DN(C180-360)	0.8,53.4	
灯具内光源数(只)	1	上射光通比(%)	1.8	CIBSE SHR NOM	1.25	
实测电源电压(V)	220	下射光通比(%)	98.2	CIBSE SHR MAX	1.25	

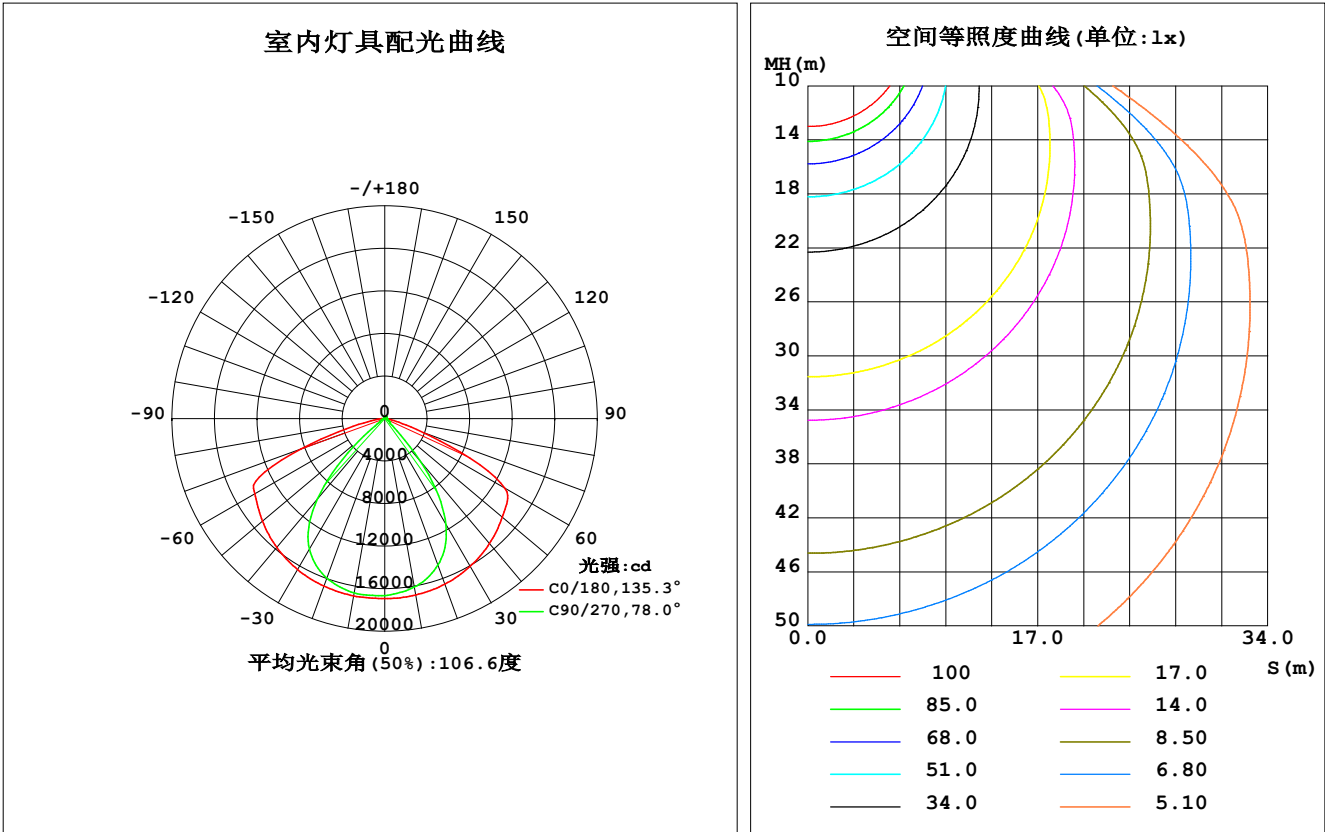

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C90	C180	C270					γ(°)	Φ环	Φ总	%lum, lamp
10	1684	1609	1693	1664					0- 10	1594	1594	3.64, 3.64
20	1656	1465	1676	1596					10- 20	4625	6219	14.2, 14.2
30	1606	1151	1640	1418					20- 30	7085	13304	30.4, 30.4
40	1534	511.5	1580	984.3					30- 40	8254	21558	49.2, 49.2
50	1444	69.80	1501	260.8					40- 50	7462	29020	66.3, 66.3
60	1301	43.95	1413	51.59					50- 60	6740	35759	81.7, 81.7
70	389.5	23.22	839.8	27.03					60- 70	5380	41139	93.9, 93.9
80	48.23	13.46	132.3	11.49					70- 80	1620	42759	97.6, 97.6
90	14.71	7.337	10.44	5.954					80- 90	254.7	43014	98.2, 98.2
100	12.39	6.375	8.046	5.619					90-100	90.96	43105	98.4, 98.4
110	12.36	7.459	9.835	6.851					100-110	90.11	43195	98.6, 98.6
120	13.25	9.682	12.04	8.417					110-120	98.63	43293	98.9, 98.9
130	14.35	12.23	14.41	10.33					120-130	105.9	43399	99.1, 99.1
140	16.75	15.08	16.69	13.57					130-140	108.8	43508	99.3, 99.3
150	19.87	19.03	19.23	16.94					140-150	107.4	43615	99.6, 99.6
160	21.82	21.94	21.76	19.83					150-160	92.58	43708	99.8, 99.8
170	23.15	24.29	23.32	23.12					160-170	63.32	43771	99.9, 99.9
180	23.71	25.39	23.96	25.16					170-180	22.89	43794	100, 100
单位:°		光强:×10cd								单位:lm		

锥面光通量(90度): 25453 lm

%lum = 58.1%
%lamp = 58.1%

锥面光通量(120度): 35759 lm


%lum = 81.7%
%lamp = 81.7%

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数: U:218.5V I:1.111A P:238.7W PF:0.971 Freq:49.99Hz 实检光通:43794.3x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

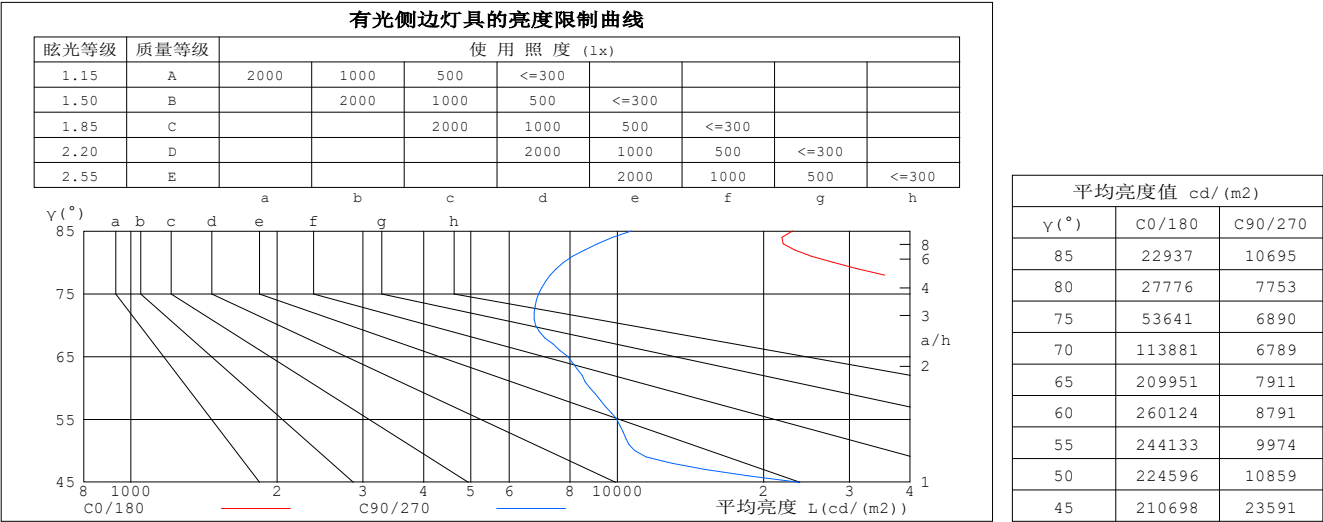


C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:218.5V I:1.111A P:238.7W PF:0.971 Freq:49.99Hz 实检光通:43794.3x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.05	1.01	.98	1.03	.99	.96	.98	.95	.93	.94	.92	.90	.90	.88	.87	.84
2.0	.92	.86	.81	.90	.85	.80	.87	.82	.78	.83	.79	.76	.80	.77	.74	.72
3.0	.82	.74	.68	.80	.73	.67	.77	.71	.66	.74	.69	.64	.71	.67	.63	.61
4.0	.73	.64	.58	.71	.63	.57	.69	.62	.56	.66	.60	.56	.64	.59	.55	.52
5.0	.65	.56	.50	.64	.56	.50	.62	.55	.49	.59	.53	.48	.57	.52	.48	.46
6.0	.59	.50	.44	.58	.50	.44	.56	.49	.43	.54	.48	.43	.52	.47	.42	.40
7.0	.53	.45	.39	.53	.44	.39	.51	.44	.38	.49	.43	.38	.48	.42	.38	.36
8.0	.49	.41	.35	.48	.40	.35	.47	.39	.34	.45	.39	.34	.44	.38	.34	.32
9.0	.45	.37	.31	.44	.37	.31	.43	.36	.31	.42	.35	.31	.41	.35	.31	.29
10.0	.41	.34	.29	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.28	.26

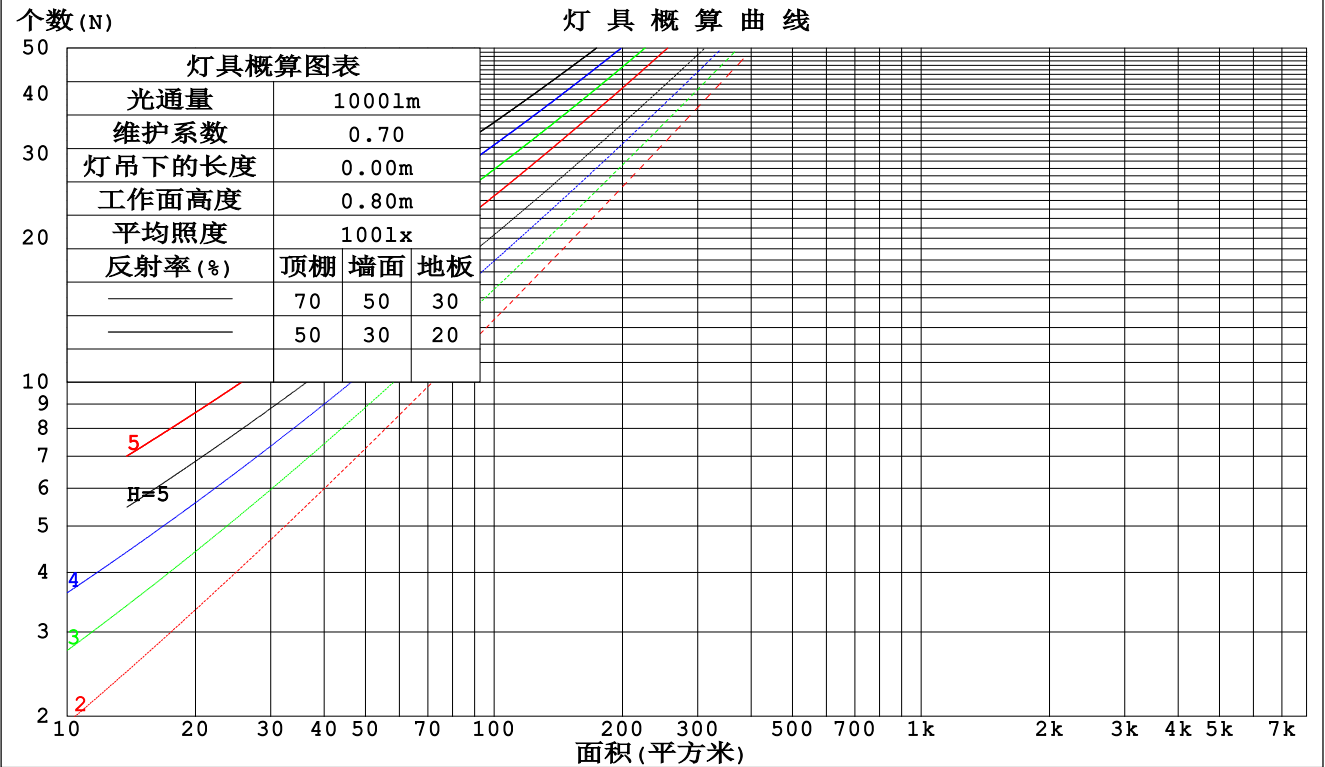

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:218.5V I:1.111A P:238.7W PF:0.971 Freq:49.99Hz 实检光通:43794.3x1 lm								
灯具名称:			灯具类型:			灯具重量:		
灯具规格:			外型尺寸:			测试编号:		
制造厂商: EVERFINE			发光口面:			遮光角:		

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.277	.158	.050	.270	.154	.049	.256	.147	.047	.243	.140	.045	.231	.134	.043	
2.0	.268	.147	.045	.262	.144	.044	.249	.139	.043	.238	.133	.042	.227	.128	.040	
3.0	.252	.134	.040	.246	.132	.040	.235	.128	.039	.225	.123	.038	.216	.119	.037	
4.0	.236	.122	.036	.230	.121	.036	.221	.117	.035	.211	.114	.034	.203	.110	.034	
5.0	.220	.112	.032	.215	.110	.032	.206	.107	.032	.198	.104	.031	.190	.102	.031	
6.0	.205	.103	.029	.201	.101	.029	.193	.099	.029	.186	.096	.028	.179	.094	.028	
7.0	.191	.095	.027	.188	.094	.027	.181	.091	.026	.174	.089	.026	.168	.087	.026	
8.0	.179	.088	.025	.176	.087	.025	.170	.085	.024	.164	.083	.024	.158	.081	.024	
9.0	.169	.082	.023	.166	.081	.023	.160	.079	.022	.155	.078	.022	.150	.076	.022	
10.0	.159	.076	.021	.156	.076	.021	.151	.074	.021	.146	.073	.021	.142	.071	.020	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.204	.204	.204	.174	.174	.174	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.192	.170	.151	.164	.146	.130	.112	.100	.090	.065	.058	.052	.021	.019	.017	
2.0	.183	.146	.115	.157	.126	.099	.107	.087	.069	.062	.051	.041	.020	.016	.013	
3.0	.175	.128	.091	.150	.110	.079	.103	.077	.055	.059	.045	.032	.019	.015	.011	
4.0	.167	.115	.074	.144	.099	.065	.099	.069	.045	.057	.040	.027	.018	.013	.009	
5.0	.160	.104	.063	.138	.090	.055	.095	.063	.039	.055	.037	.023	.018	.012	.008	
6.0	.153	.096	.054	.132	.083	.047	.091	.058	.034	.053	.034	.020	.017	.011	.007	
7.0	.147	.089	.048	.126	.077	.042	.087	.054	.030	.051	.032	.018	.016	.010	.006	
8.0	.140	.083	.044	.121	.072	.038	.084	.051	.027	.049	.030	.016	.016	.010	.005	
9.0	.135	.078	.040	.116	.068	.035	.080	.048	.025	.047	.028	.015	.015	.009	.005	
10.0	.129	.074	.037	.111	.064	.032	.077	.045	.023	.045	.027	.014	.015	.009	.005	

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:218.5V I:1.111A P:238.7W PF:0.971 Freq:49.99Hz 实检光通:43794.3x1 lm										
灯具名称:			灯具类型:			灯具重量:				
灯具规格:			外型尺寸:			测试编号:				
制造厂商: EVERFINE			发光口面:			遮光角:				
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	19.3	20.8	19.6	21.0	21.2	12.1	13.5	12.3	13.7	14.0
3H	20.2	21.5	20.5	21.8	22.0	12.2	13.5	12.5	13.8	14.1
4H	20.2	21.5	20.5	21.7	22.0	12.2	13.4	12.5	13.7	14.0
6H	20.1	21.3	20.5	21.6	21.9	12.1	13.3	12.4	13.6	13.9
8H	20.1	21.2	20.5	21.5	21.9	12.0	13.2	12.4	13.5	13.8
12H	20.0	21.1	20.4	21.4	21.8	12.0	13.1	12.4	13.4	13.7
4H 2H	19.4	20.6	19.7	20.9	21.2	14.1	15.3	14.4	15.6	15.9
3H	20.3	21.4	20.7	21.7	22.0	14.3	15.4	14.7	15.7	16.0
4H	20.3	21.3	20.7	21.7	22.0	14.3	15.2	14.7	15.6	16.0
6H	20.3	21.2	20.7	21.5	21.9	14.2	15.1	14.6	15.4	15.8
8H	20.2	21.1	20.7	21.4	21.9	14.2	15.0	14.6	15.4	15.8
12H	20.2	20.9	20.7	21.4	21.8	14.1	14.9	14.6	15.3	15.7
8H 4H	20.2	21.0	20.7	21.4	21.8	14.4	15.2	14.8	15.6	16.0
6H	20.2	20.8	20.7	21.3	21.7	14.3	15.0	14.8	15.4	15.9
8H	20.2	20.7	20.6	21.2	21.7	14.3	14.9	14.8	15.4	15.8
12H	20.1	20.6	20.6	21.1	21.6	14.3	14.8	14.8	15.3	15.8
12H 4H	20.2	20.9	20.6	21.3	21.8	14.3	15.1	14.8	15.5	15.9
6H	20.1	20.7	20.6	21.2	21.7	14.3	14.9	14.8	15.4	15.8
8H	20.1	20.6	20.6	21.1	21.6	14.3	14.8	14.8	15.3	15.8
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.7 / - 0.8				
1.5H	+ 0.8 / - 0.8					+ 0.5 / - 0.7				
2.0H	+ 1.9 / - 3.2					+ 2.2 / - 4.4				

依据CIE Pub.117计算, 43794lm光源光通表格中的数据需要进行修正(81log(F/F0) = 13.1)。
出光口面积: 0.1 m2

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:218.5V I:1.111A P:238.7W PF:0.971 Freq:49.99Hz 实检光通:43794.3x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	60	49	42	59	49	42	58	48	42	36
0.80	70	59	52	69	59	52	67	58	52	45
1.00	78	68	61	77	67	61	75	68	60	53
1.25	85	75	69	84	75	68	81	73	67	60
1.50	90	81	74	88	80	74	85	78	73	65
2.00	97	89	83	95	88	82	91	85	80	73
2.50	100	93	88	98	92	87	94	89	85	76
3.00	104	97	92	101	96	91	97	93	89	80
4.00	107	102	98	105	100	97	100	97	94	85
5.00	110	105	102	107	103	100	102	99	97	87
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHR NOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:218.5V I:1.111A P:238.7W PF:0.971 Freq:49.99Hz 实检光通:43794.3x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

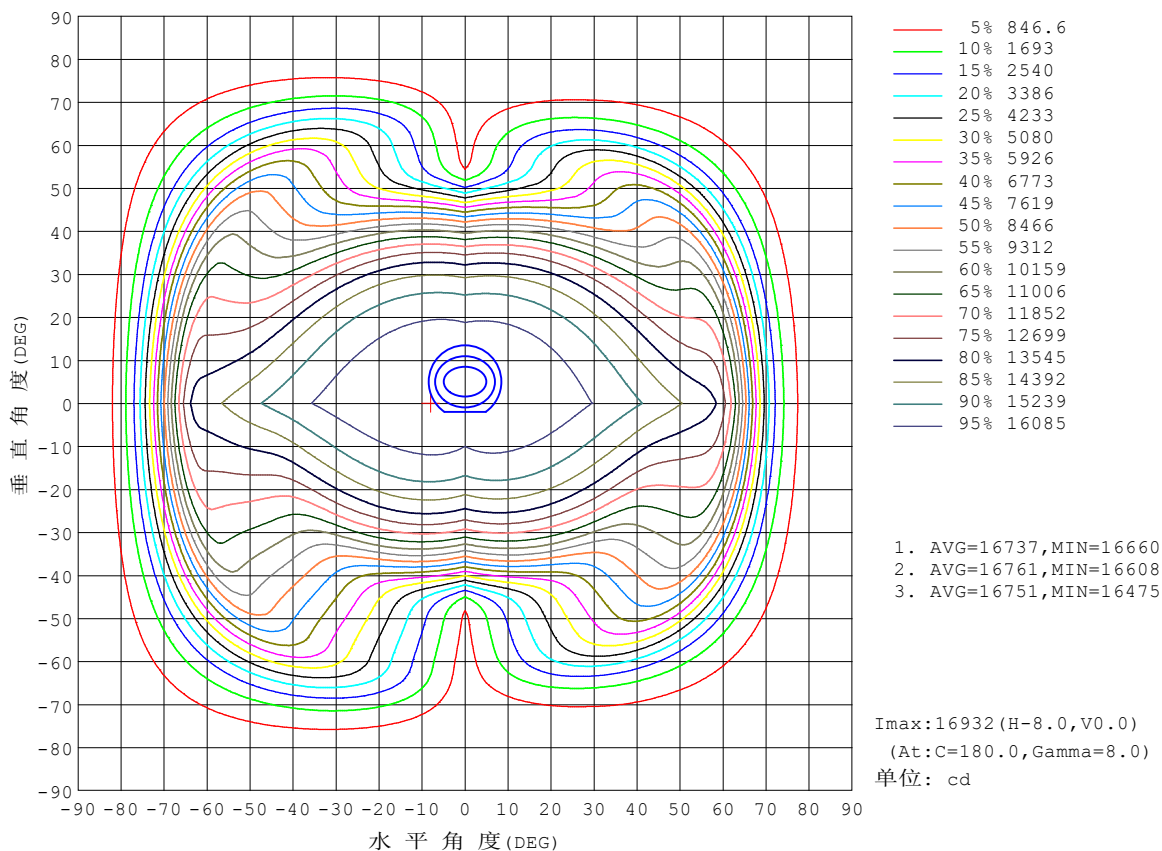


C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:218.5V I:1.111A P:238.7W PF:0.971 Freq:49.99Hz 实检光通:43794.3x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

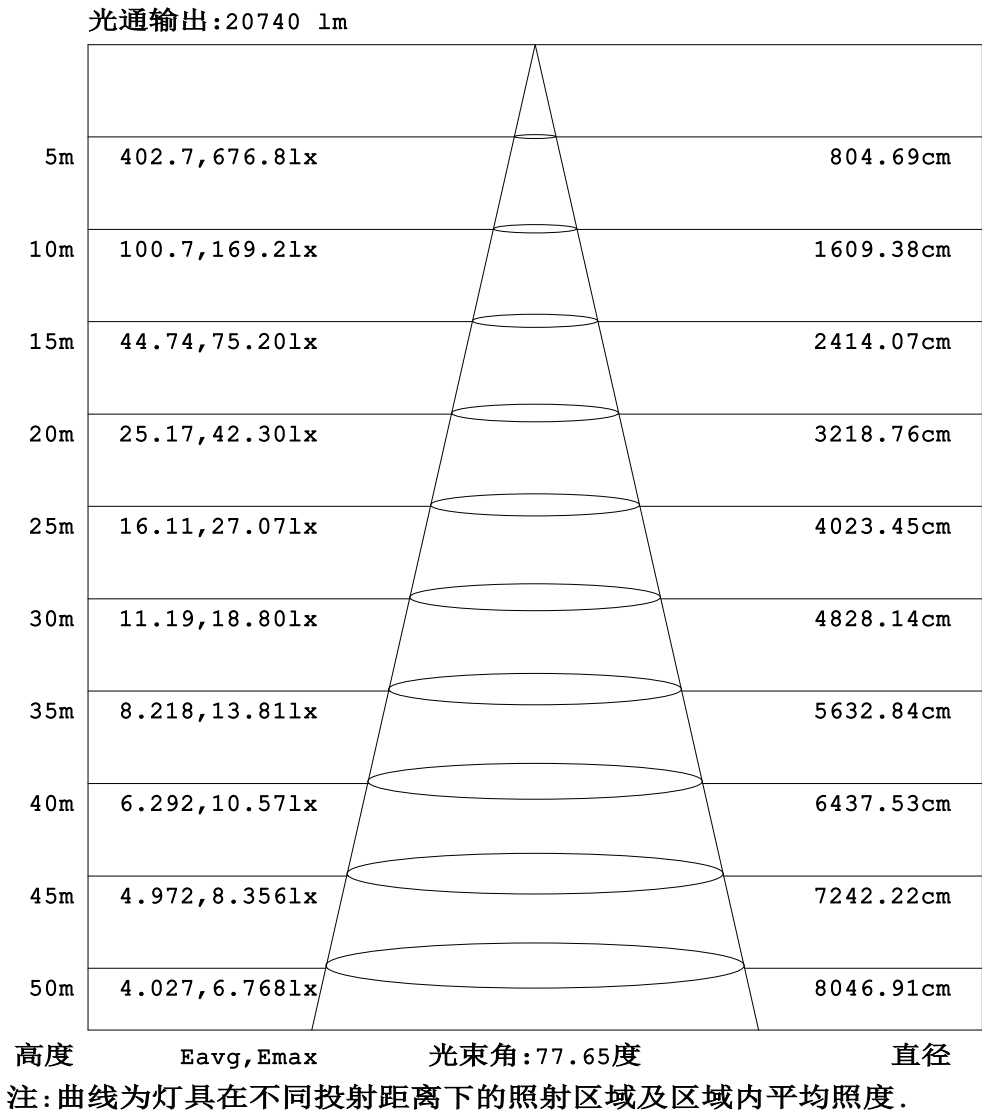


C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:218.5V I:1.111A P:238.7W PF:0.971 Freq:49.99Hz 实检光通:43794.3x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

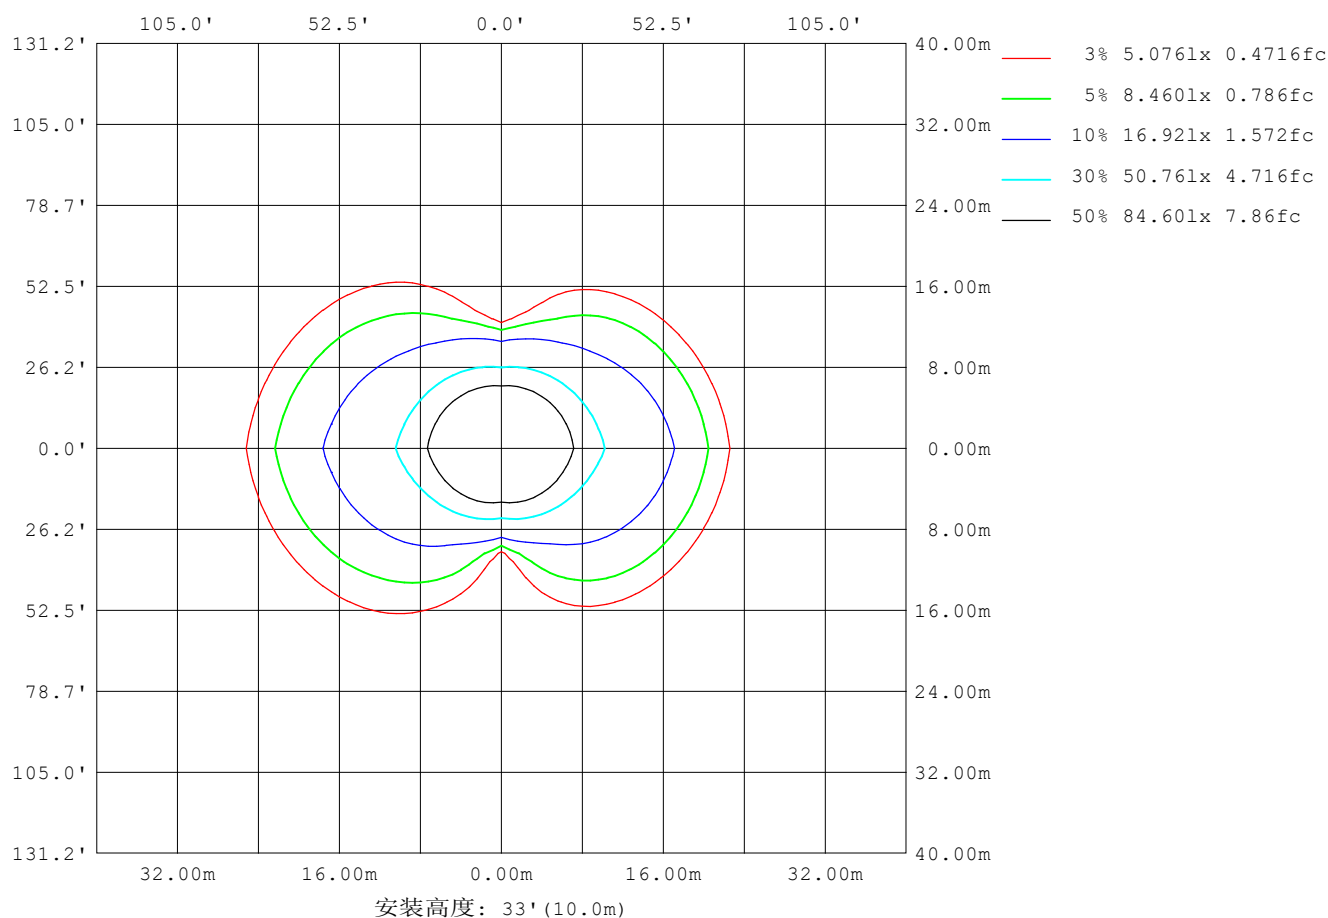

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:218.5V I:1.111A P:238.7W PF:0.971 Freq:49.99Hz 实检光通:43794.3x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	259078
L横 (75) av	99576
L横 (85) av	35892
L纵 (65) av	8511
L纵 (75) av	6494
L纵 (85) av	10332
L45 (65) av	105544
L45 (75) av	44271
L45 (85) av	20727

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

平面照度曲线

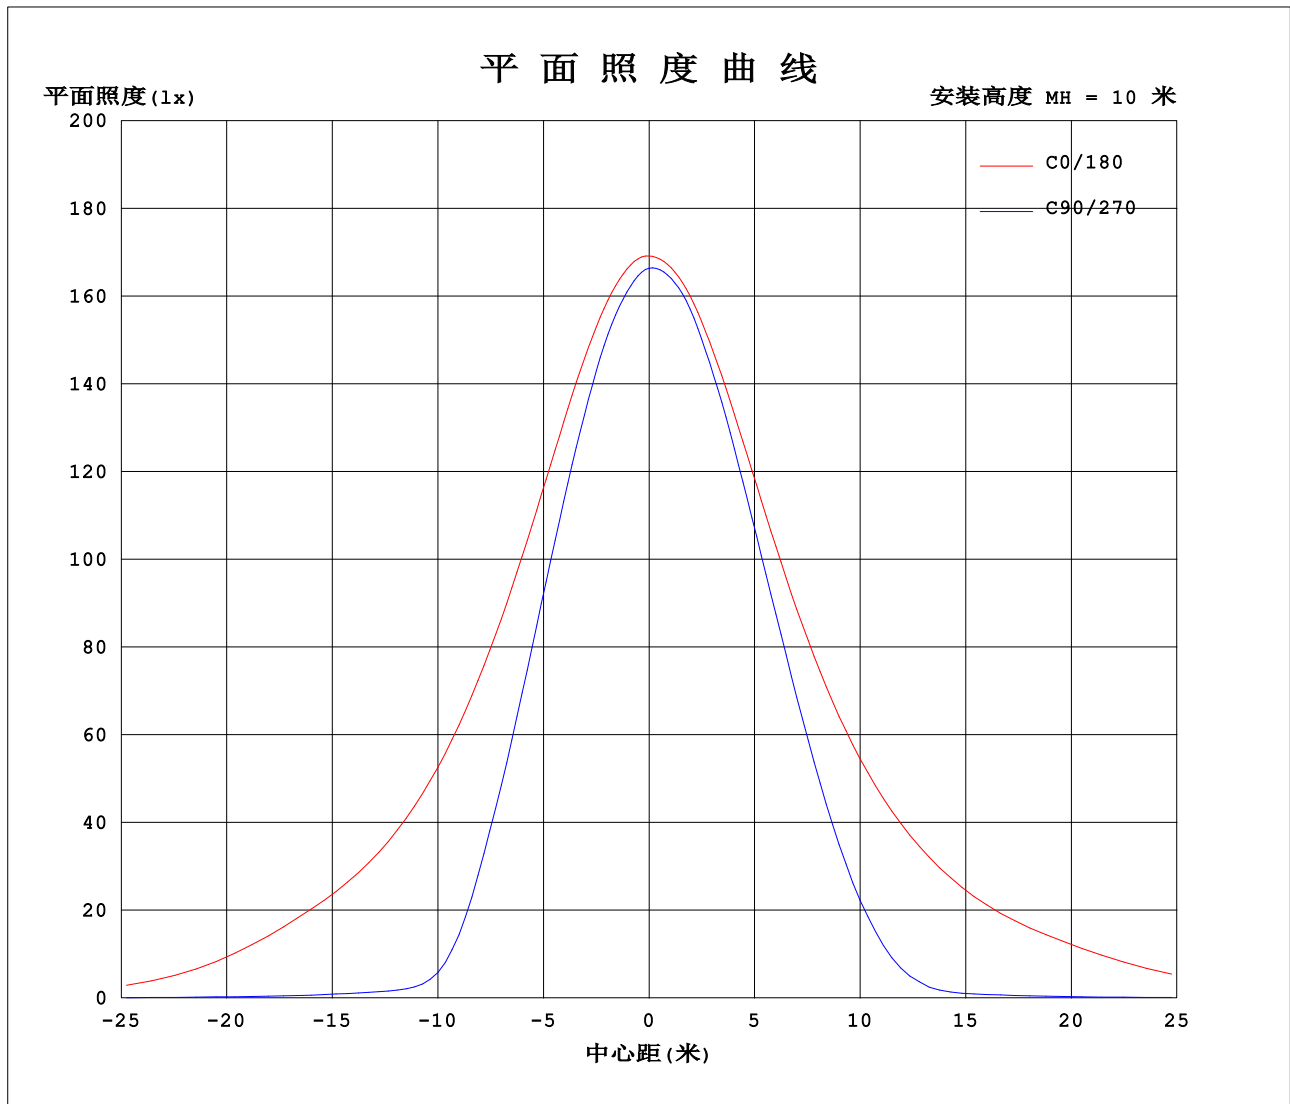

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-23

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:218.5V I:1.111A P:238.7W PF:0.971 Freq:49.99Hz 实检光通:43794.3x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

表--1				单位: ×10cd															
γ (DEG)	C (DEG)	0	90	180	270														
	0	1692	1664	1692	1664														
	5	1691	1642	1692	1667														
	10	1684	1609	1693	1664														
	15	1673	1552	1686	1638														
	20	1656	1465	1676	1596														
	25	1634	1339	1661	1526														
	30	1606	1151	1640	1418														
	35	1572	882	1613	1247														
	40	1534	512	1580	984														
	45	1490	167	1543	631														
	50	1444	69.8	1501	261														
	55	1400	57.2	1454	75.4														
	60	1301	44.0	1413	51.6														
	65	887	33.4	1303	38.5														
	70	389	23.2	840	27.0														
	75	139	17.8	377	15.8														
	80	48.2	13.5	132	11.5														
	85	20.0	9.32	42.6	8.69														
	90	14.7	7.34	10.4	5.95														
	95	13.2	6.62	7.59	5.29														
	100	12.4	6.38	8.05	5.62														
	105	12.2	6.69	8.85	6.16														
	110	12.4	7.46	9.83	6.85														
	115	12.8	8.50	10.9	7.61														
	120	13.3	9.68	12.0	8.42														
	125	13.8	10.9	13.3	9.30														
	130	14.4	12.2	14.4	10.3														
	135	15.3	13.6	15.5	11.8														
	140	16.7	15.1	16.7	13.6														
	145	18.4	17.0	17.9	15.3														
	150	19.9	19.0	19.2	16.9														
	155	20.9	20.6	20.5	18.4														
	160	21.8	21.9	21.8	19.8														
	165	22.6	23.2	22.7	21.4														
	170	23.1	24.3	23.3	23.1														
	175	23.6	25.2	23.7	24.5														
	180	23.7	25.4	24.0	25.2														

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	16920	16642	16920	16642
3.0	16921	16529	16911	16669
6.0	16898	16362	16925	16676
9.0	16856	16167	16931	16666
12.0	16798	15894	16909	16560
15.0	16728	15520	16864	16379
18.0	16637	15034	16803	16153
21.0	16521	14436	16730	15851
24.0	16388	13683	16639	15433
27.0	16231	12725	16527	14879
30.0	16055	11512	16397	14180
33.0	15863	9991	16240	13263
36.0	15652	8171	16066	12025
39.0	15423	5959	15871	10451
42.0	15171	3524	15661	8535
45.0	14899	1668	15433	6312
48.0	14623	868.5	15186	4012
51.0	14344	664.9	14921	2034
54.0	14086	595.6	14637	912.6
57.0	13804	515.1	14358	593.5
60.0	13006	439.5	14127	515.9
63.0	10927	375.8	13841	433.3
66.0	7740	309.7	12360	362.6
69.0	4706	247.9	9463	296.6
72.0	2612	208.5	6303	221.9
75.0	1388	178.3	3766	157.8
78.0	737.1	151.3	2054	127.8
81.0	392.2	126.7	1057	108.9
84.0	228.1	102.3	536.1	92.14
87.0	167.1	81.56	235.8	76.77
90.0	147.1	73.37	104.4	59.54
93.0	136.6	68.22	77.88	52.20
96.0	129.4	65.34	76.37	53.42
99.0	125.0	63.81	79.17	55.37
102.0	122.6	64.27	83.38	58.11
105.0	122.0	66.91	88.51	61.55
108.0	122.6	71.10	94.33	65.60
111.0	124.2	76.50	100.2	69.97
114.0	126.6	82.73	106.3	74.50
117.0	129.5	89.53	113.2	79.23
120.0	132.5	96.82	120.4	84.17
123.0	135.6	104.2	127.8	89.39
126.0	138.5	111.9	135.1	94.94
129.0	142.2	119.7	141.9	101.1
132.0	146.5	127.6	148.5	108.4
135.0	153.0	135.6	155.2	117.6
138.0	161.3	144.3	162.1	128.3
141.0	170.7	154.4	169.2	139.4
144.0	180.5	166.0	176.6	150.1
147.0	190.6	178.2	184.5	160.1
150.0	198.7	190.3	192.3	169.4
153.0	204.8	200.3	200.1	178.0
156.0	210.8	208.6	207.9	186.5
159.0	216.4	216.8	215.3	195.3
162.0	221.4	224.5	221.9	204.5
165.0	225.7	231.9	227.2	214.3
168.0	229.2	238.8	231.1	224.5
171.0	232.5	244.7	234.2	234.3
174.0	235.3	250.1	236.6	242.5
177.0	237.1	254.1	238.4	248.2
180.0	237.1	253.9	239.6	251.6

C角度范围: 0度 - 360度
C角度间隔: 90.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-04-23

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1 系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注: