


室内灯具光度数据

实测参数: U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz 实检光通:48703.5x1 lm					
灯具名称:		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面:		遮光角:	

光源数据		光度数据				光效: 205.36 lm/W
型号		峰值光强(cd)	22803	S/MH(C0/180)	1.40	
标称功率(W)	240	灯具效率(%)	100.0	S/MH(C90/270)	1.16	
额定电源电压(V)	220	总光通量(lm)	48703	η UP,DN(C0-180)	1.1,47.5	
额定光通量(lm)	48703.5	CIE分类	直接	η UP,DN(C180-360)	1.1,50.3	
灯具内光源数(只)	1	上射光通比(%)	2.2	CIBSE SHR NOM	1.25	
实测电源电压(V)	220	下射光通比(%)	97.8	CIBSE SHR MAX	1.30	

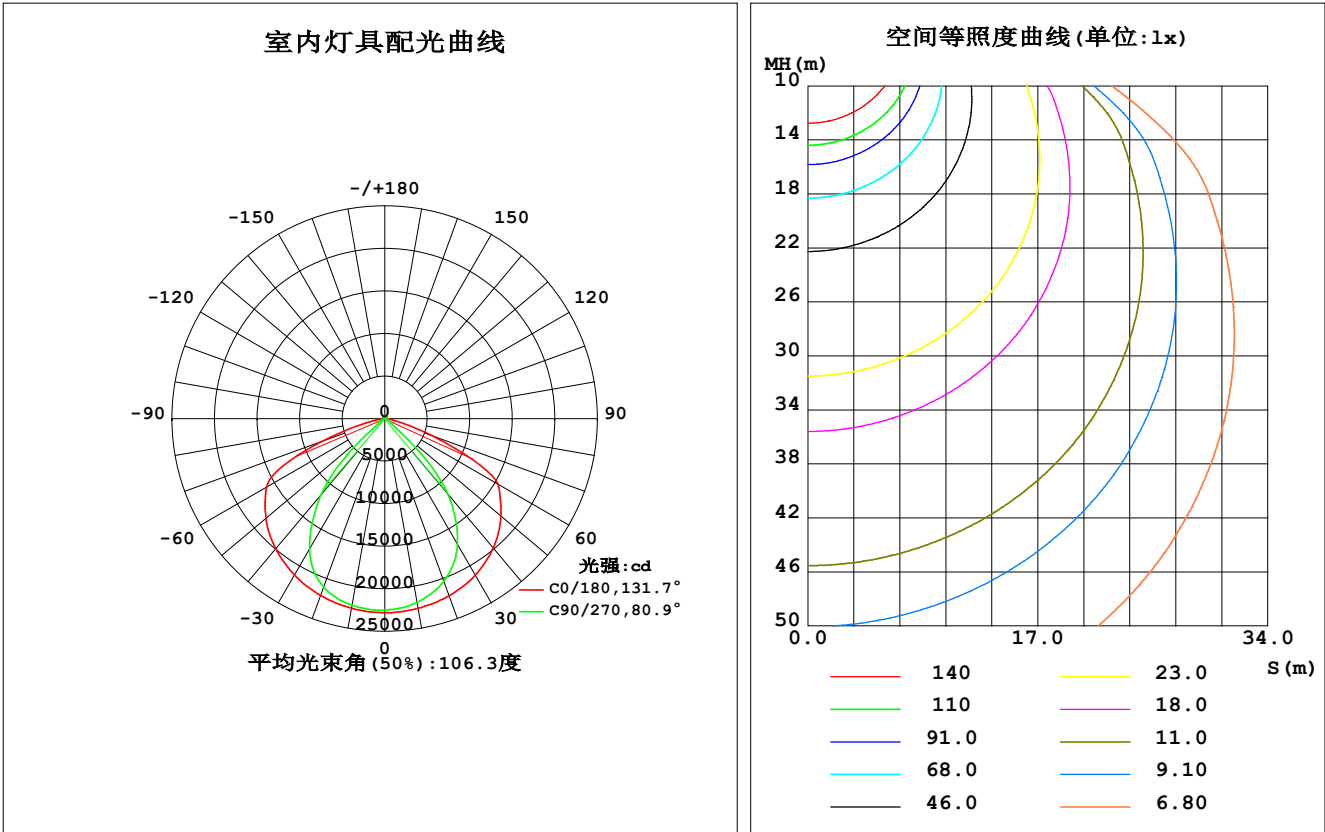

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-06-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	2263	2231	2192	2181	2262	2241	2227	2234	0- 10	2142	2142	4.4, 4.4
20	2214	2127	2033	2051	2210	2154	2105	2173	10- 20	6185	8327	17.1, 17.1
30	2126	1933	1709	1809	2123	1961	1772	2031	20- 30	9437	17764	36.5, 36.5
40	1983	1545	1152	1329	1996	1494	1164	1687	30- 40	10987	28751	59, 59
50	1783	706.0	191.4	369.4	1824	581.6	199.1	911.8	40- 50	9339	38091	78.2, 78.2
60	1534	83.73	65.30	78.41	1606	66.09	49.46	71.91	50- 60	4939	43030	88.4, 88.4
70	593.5	49.38	31.78	43.70	779.2	34.84	20.76	43.66	60- 70	3341	46371	95.2, 95.2
80	81.84	20.94	16.21	18.93	113.2	11.83	9.909	14.04	70- 80	1056	47427	97.4, 97.4
90	20.82	13.59	10.94	12.56	12.27	8.617	7.309	8.274	80- 90	205.0	47632	97.8, 97.8
100	16.66	11.87	8.893	10.80	11.07	8.965	8.326	10.02	90-100	119.1	47751	98, 98
110	16.38	13.73	9.729	11.91	13.74	11.11	10.28	12.59	100-110	121.8	47873	98.3, 98.3
120	18.21	16.77	12.21	13.91	17.08	13.39	12.51	15.85	110-120	135.2	48009	98.6, 98.6
130	21.04	21.15	15.52	16.54	20.45	15.75	15.46	20.54	120-130	148.6	48157	98.9, 98.9
140	24.08	24.99	19.54	19.87	23.79	18.87	19.86	24.25	130-140	155.3	48312	99.2, 99.2
150	27.14	27.47	23.96	23.95	27.40	22.61	23.76	27.18	140-150	148.2	48461	99.5, 99.5
160	29.92	29.99	28.14	27.99	30.69	27.36	27.97	30.12	150-160	125.5	48586	99.8, 99.8
170	32.07	32.11	31.60	31.18	32.48	30.98	32.34	32.50	160-170	86.26	48672	99.9, 99.9
180	32.98	32.75	33.71	33.14	33.14	32.61	33.81	33.21	170-180	31.01	48703	100, 100
单位:°	光强:×10cd									单位:lm		

锥面光通量(90度)：33922 lm

%lum = 69.7%
%lamp = 69.7%

锥面光通量(120度)：43030 lm


%lum = 88.4%
%lamp = 88.4%

C角度范围： 0度 - 360度
C角度间隔： 45.0度
测试速度：快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-06-12

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统：远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注：

灯具亮度限制曲线

实测参数: U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz 实检光通:48703.5x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

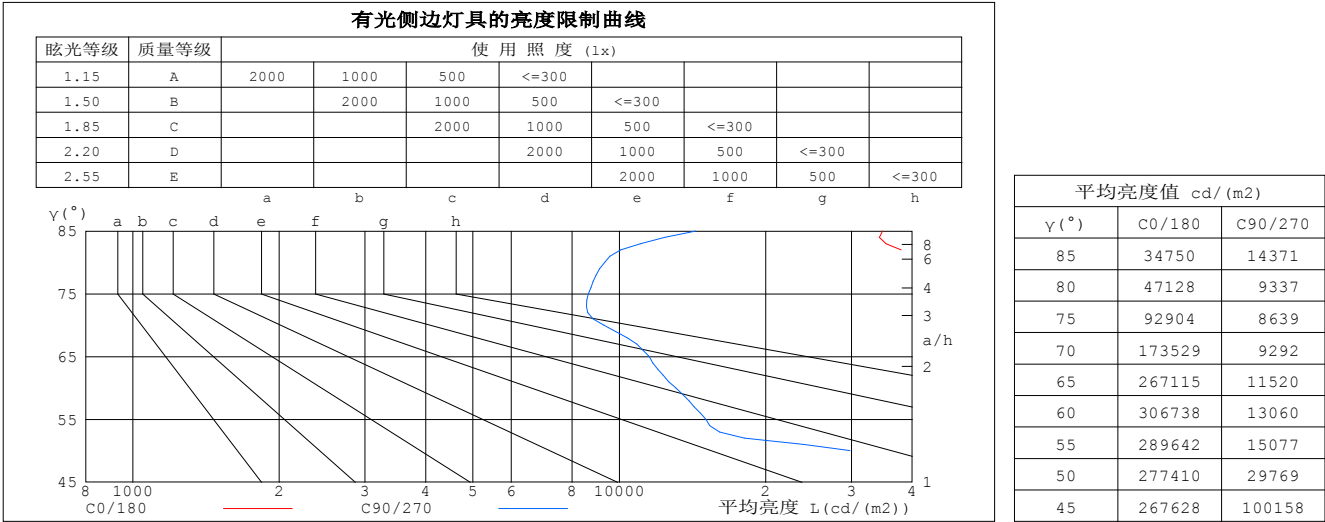


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-06-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz 实检光通:48703.5x1 lm											
灯具名称:				灯具类型:				灯具重量:			
灯具规格:				外型尺寸:				测试编号:			
制造厂商: EVERFINE				发光口面:				遮光角:			

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.07	1.03	1.00	1.04	1.01	.98	.00	.97	.95	.95	.93	.92	.92	.90	.88	.86
2.0	.95	.90	.85	.93	.88	.84	.90	.85	.82	.86	.83	.79	.83	.80	.77	.75
3.0	.86	.79	.73	.84	.77	.72	.81	.75	.71	.78	.73	.69	.75	.71	.68	.66
4.0	.77	.69	.64	.76	.69	.63	.73	.67	.62	.71	.65	.61	.68	.64	.60	.58
5.0	.70	.62	.56	.69	.61	.56	.66	.60	.55	.64	.59	.54	.62	.57	.53	.51
6.0	.63	.56	.50	.62	.55	.49	.61	.54	.49	.59	.53	.48	.57	.52	.48	.46
7.0	.58	.50	.45	.57	.50	.44	.56	.49	.44	.54	.48	.43	.52	.47	.43	.41
8.0	.53	.46	.40	.53	.45	.40	.51	.44	.40	.50	.44	.39	.48	.43	.39	.37
9.0	.49	.42	.37	.49	.41	.36	.47	.41	.36	.46	.40	.36	.45	.40	.36	.34
10.0	.46	.38	.33	.45	.38	.33	.44	.37	.33	.43	.37	.33	.42	.36	.33	.31

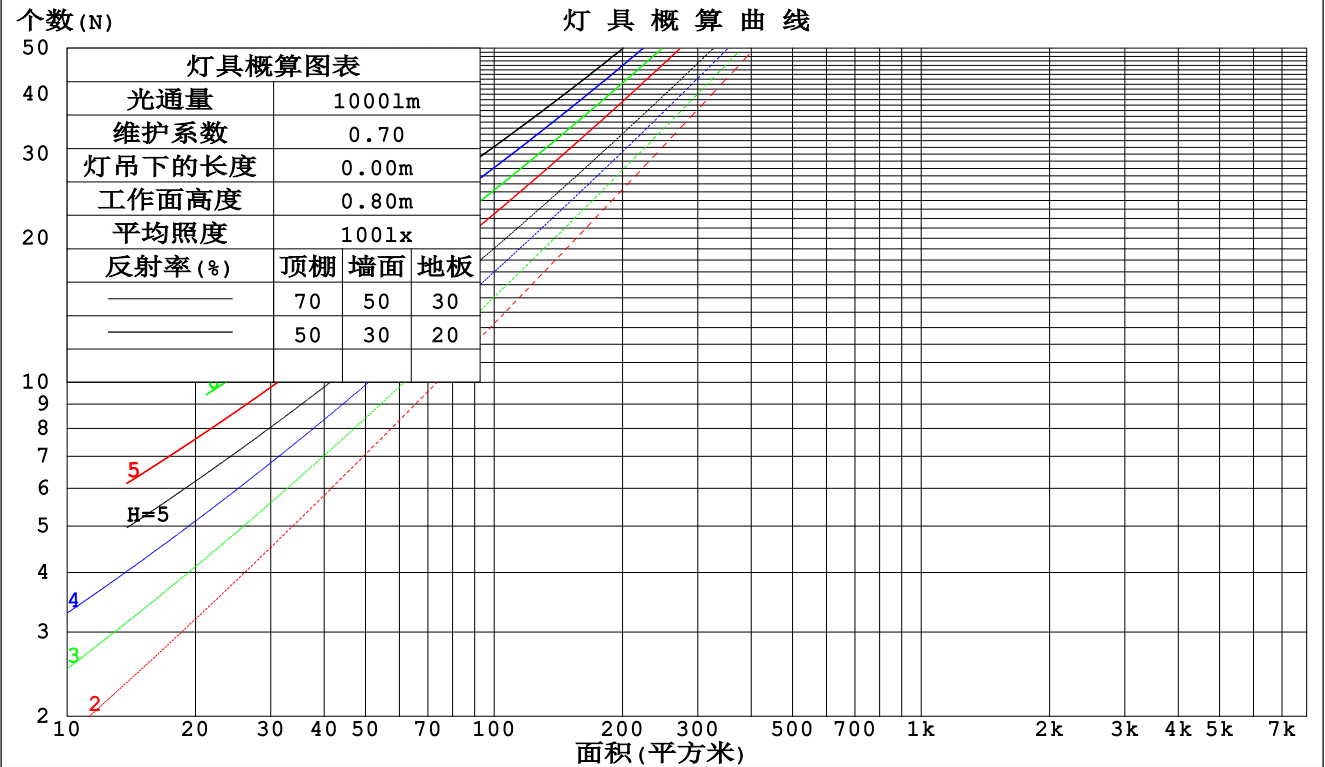

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-06-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz 实检光通:48703.5x1 lm					
灯具名称:		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面:		遮光角:	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.247	.141	.045	.240	.137	.043	.225	.129	.041	.212	.122	.039	.200	.116	.037	
2.0	.239	.131	.040	.233	.128	.040	.220	.123	.038	.209	.117	.037	.198	.112	.035	
3.0	.227	.121	.036	.221	.118	.036	.210	.114	.035	.200	.110	.034	.191	.106	.033	
4.0	.214	.111	.033	.209	.109	.032	.199	.106	.032	.190	.102	.031	.182	.099	.030	
5.0	.201	.103	.030	.197	.101	.029	.188	.098	.029	.180	.095	.028	.172	.092	.028	
6.0	.189	.095	.027	.185	.094	.027	.178	.091	.026	.170	.088	.026	.164	.086	.026	
7.0	.178	.088	.025	.175	.087	.025	.168	.085	.024	.161	.083	.024	.155	.081	.024	
8.0	.168	.082	.023	.165	.081	.023	.159	.079	.023	.153	.077	.022	.147	.076	.022	
9.0	.159	.077	.022	.156	.076	.021	.151	.074	.021	.145	.073	.021	.140	.071	.021	
10.0	.151	.072	.020	.148	.072	.020	.143	.070	.020	.138	.069	.020	.134	.067	.019	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.207	.207	.207	.177	.177	.177	.121	.121	.121	.069	.069	.069	.022	.022	.022	
1.0	.193	.174	.156	.165	.149	.134	.113	.102	.093	.065	.059	.054	.021	.019	.017	
2.0	.182	.149	.121	.156	.128	.105	.107	.089	.073	.062	.052	.043	.020	.017	.014	
3.0	.173	.131	.097	.149	.113	.085	.102	.079	.059	.059	.046	.035	.019	.015	.011	
4.0	.165	.117	.081	.142	.101	.070	.098	.071	.049	.056	.041	.029	.018	.013	.010	
5.0	.158	.107	.069	.136	.092	.060	.093	.064	.042	.054	.038	.025	.017	.012	.008	
6.0	.151	.098	.060	.130	.085	.052	.090	.059	.037	.052	.035	.022	.017	.011	.007	
7.0	.145	.091	.053	.125	.079	.046	.086	.055	.033	.050	.033	.020	.016	.011	.006	
8.0	.139	.085	.048	.120	.074	.042	.083	.052	.030	.048	.031	.018	.016	.010	.006	
9.0	.134	.080	.044	.115	.070	.039	.080	.049	.027	.046	.029	.016	.015	.010	.005	
10.0	.129	.076	.041	.111	.066	.036	.077	.047	.026	.045	.028	.015	.015	.009	.005	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-06-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz 实检光通:48703.5x1 lm										
灯具名称:			灯具类型:			灯具重量:				
灯具规格:			外型尺寸:			测试编号:				
制造厂商: EVERFINE			发光口面:			遮光角:				
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	18.9	20.2	19.2	20.4	20.6	11.3	12.6	11.6	12.9	13.1
3H	20.1	21.3	20.4	21.6	21.8	11.2	12.4	11.5	12.7	12.9
4H	20.2	21.4	20.6	21.6	21.9	11.1	12.3	11.5	12.5	12.8
6H	20.2	21.3	20.6	21.6	21.9	11.1	12.1	11.4	12.4	12.7
8H	20.2	21.2	20.5	21.5	21.8	11.0	12.0	11.4	12.4	12.7
12H	20.1	21.1	20.5	21.4	21.8	11.0	12.0	11.4	12.3	12.6
4H 2H	18.6	19.8	19.0	20.0	20.3	11.7	12.8	12.0	13.1	13.4
3H	19.9	20.9	20.3	21.2	21.6	11.6	12.5	11.9	12.9	13.2
4H	20.1	21.0	20.5	21.3	21.7	11.5	12.4	11.9	12.7	13.1
6H	20.1	20.9	20.5	21.3	21.7	11.5	12.2	11.9	12.6	13.0
8H	20.1	20.8	20.5	21.2	21.6	11.5	12.2	11.9	12.6	13.0
12H	20.1	20.7	20.5	21.1	21.6	11.5	12.1	11.9	12.5	13.0
8H 4H	20.0	20.7	20.4	21.1	21.5	11.7	12.4	12.1	12.8	13.2
6H	20.0	20.6	20.5	21.0	21.5	11.6	12.2	12.1	12.7	13.1
8H	20.0	20.5	20.5	21.0	21.5	11.6	12.2	12.1	12.6	13.1
12H	20.0	20.4	20.5	20.9	21.4	11.7	12.1	12.2	12.6	13.1
12H 4H	19.9	20.6	20.4	21.0	21.4	11.6	12.3	12.1	12.7	13.2
6H	19.9	20.5	20.4	20.9	21.4	11.6	12.1	12.1	12.6	13.1
8H	19.9	20.4	20.4	20.9	21.4	11.6	12.1	12.2	12.6	13.1
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 0.5 / - 0.7					+ 2.5 / - 5.8				
1.5H	+ 1.2 / - 2.1					+ 2.2 / - 5.3				
2.0H	+ 2.9 / - 5.1					+ 5.0 / - 4.3				

依据CIE Pub.117计算, 48703lm光源光通表格中的数据需要进行修正(8log(F/F0) = 13.5)。
出光口面积: 0.1 m2

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-06-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz 实检光通:48703.5x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	66	56	50	65	56	50	64	55	50	44
0.80	76	66	60	75	66	60	73	65	59	53
1.00	84	74	68	82	74	68	80	74	67	61
1.25	90	81	76	89	81	75	86	79	74	68
1.50	94	86	81	93	85	80	90	84	79	72
2.00	100	93	88	98	92	87	95	89	85	78
2.50	103	97	92	101	95	91	97	93	89	81
3.00	106	100	96	103	99	95	99	95	92	84
4.00	109	104	101	106	102	99	102	99	96	87
5.00	111	107	104	108	105	102	104	101	99	89
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-06-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz 实检光通:48703.5x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

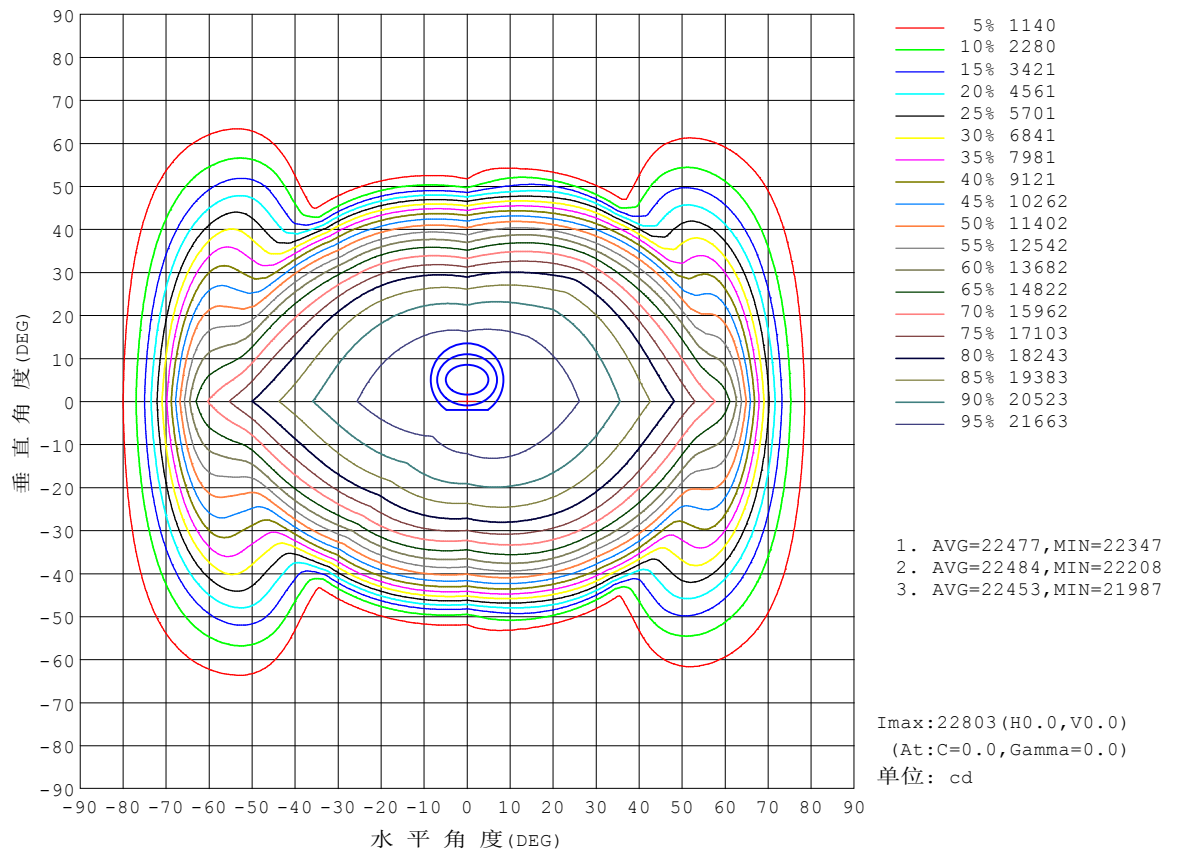


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-06-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz 实检光通:48703.5x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

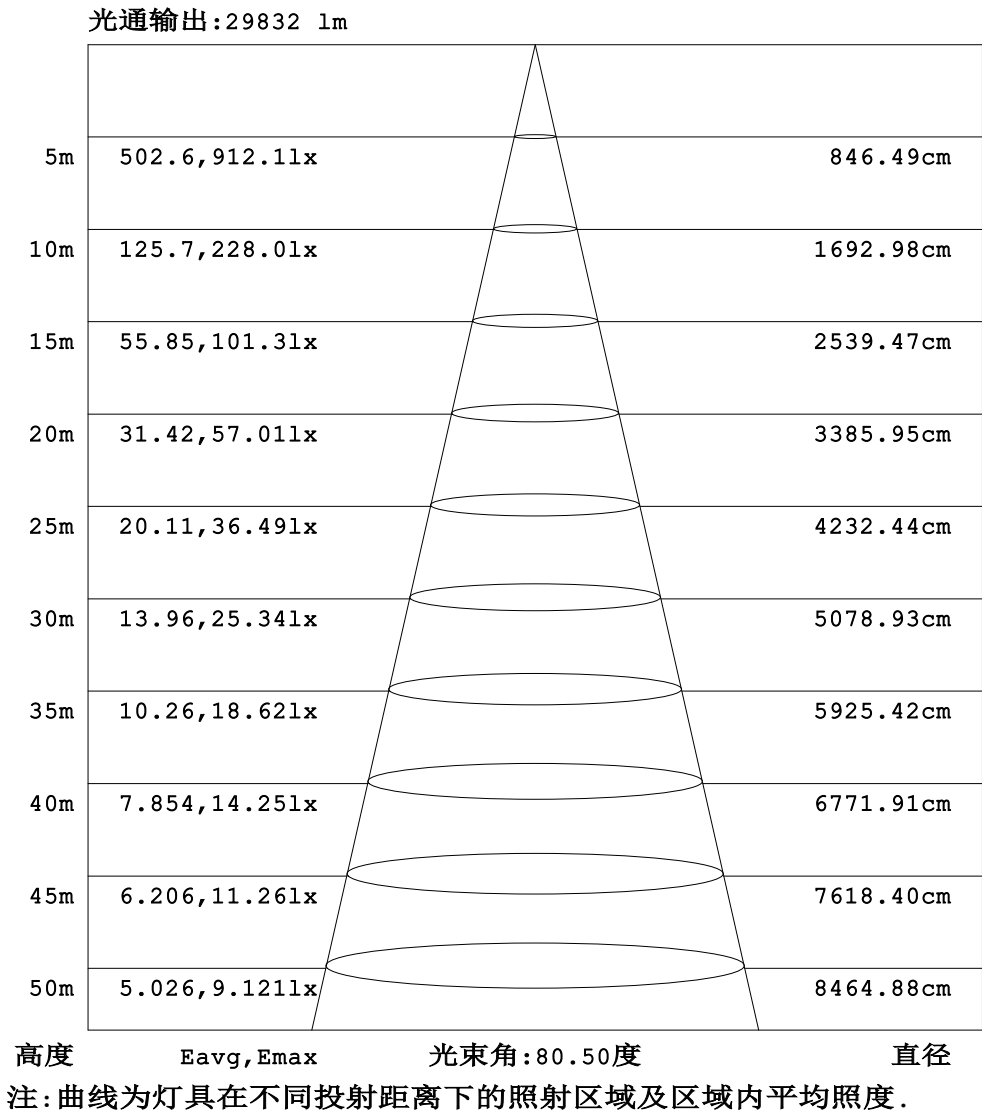


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-06-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz 实检光通:48703.5x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

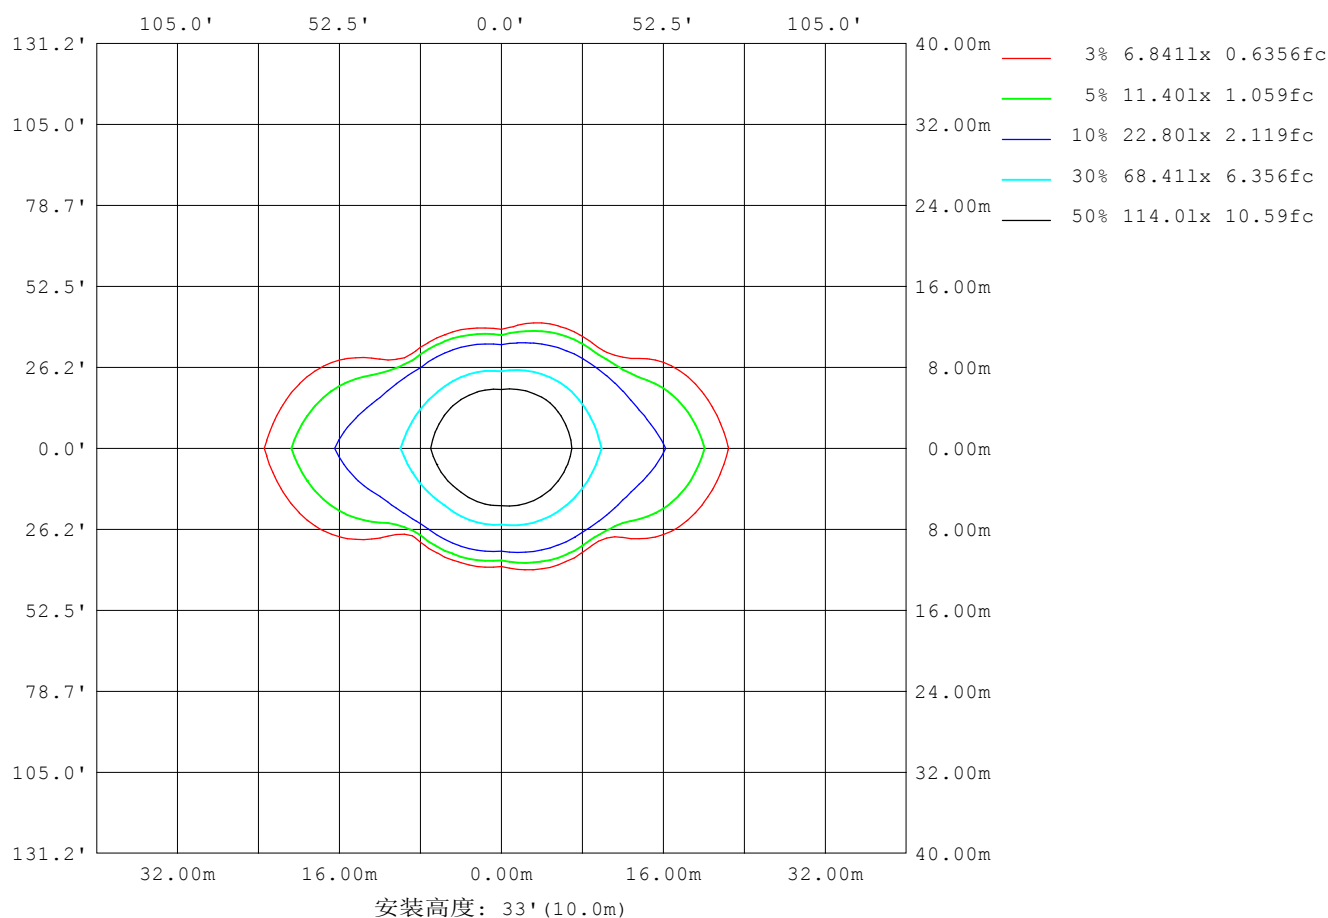

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-06-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz 实检光通:48703.5x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	290684
L横 (75) av	112786
L横 (85) av	35564
L纵 (65) av	9791
L纵 (75) av	6925
L纵 (85) av	11295
L45 (65) av	14383
L45 (75) av	10667
L45 (85) av	14012

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-06-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:9.250米 [K=1.0000]
备注:

平面照度曲线

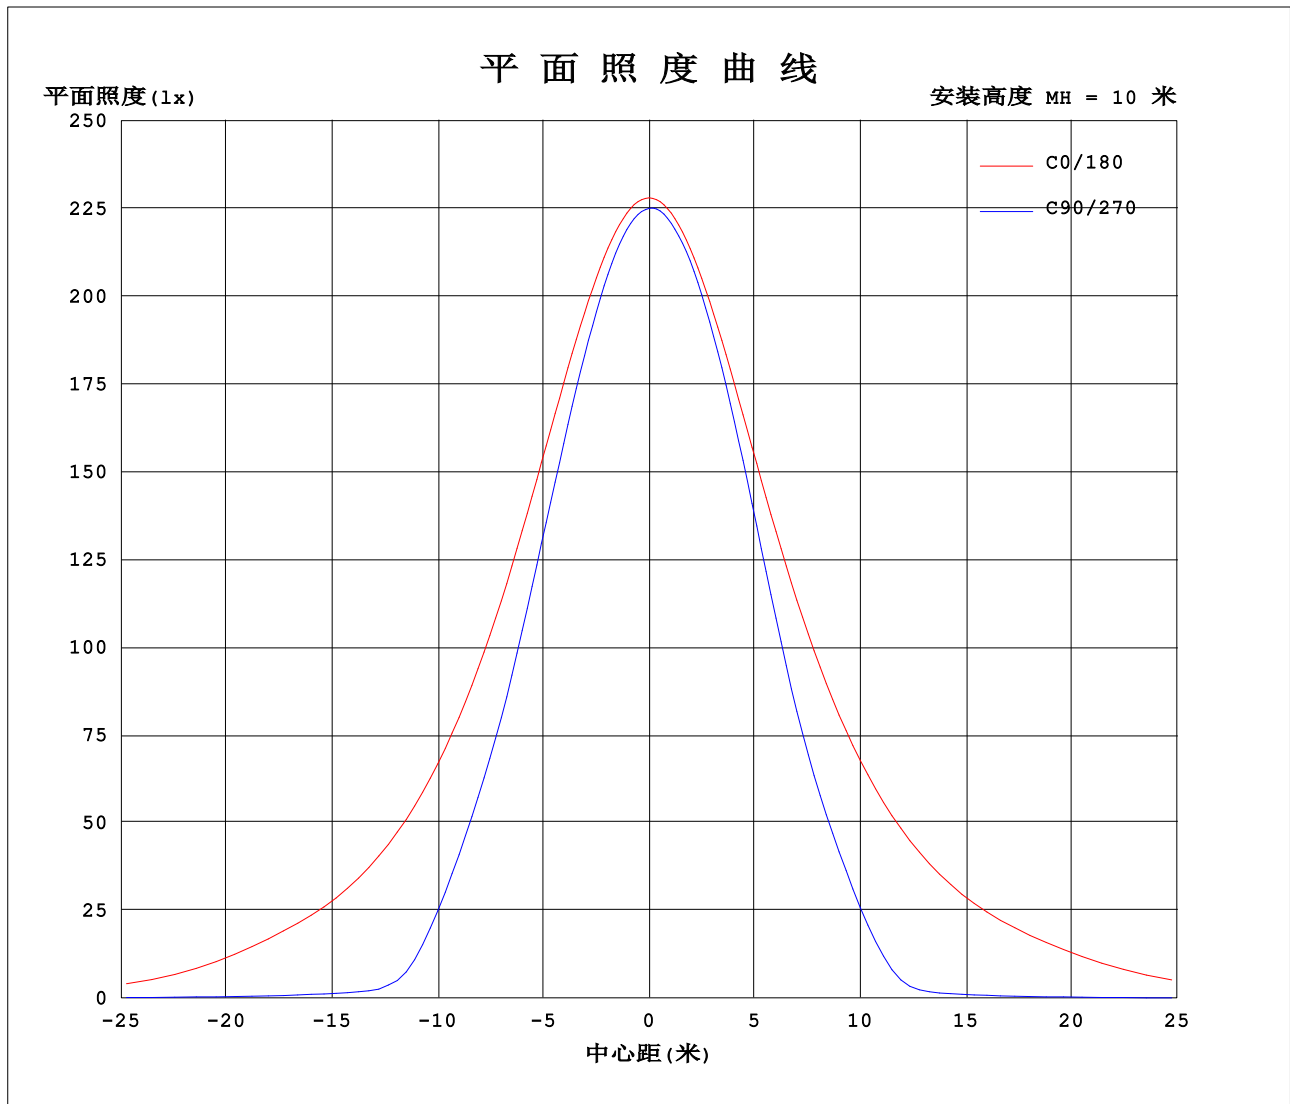

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-06-12

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:218.38V I:1.1186A P:237.16W PF:0.9709 Freq:50.18Hz 实检光通:48703.5x1 lm								
灯具名称:					灯具类型:			灯具重量:
灯具规格:					外型尺寸:			测试编号:
制造厂商: EVERFINE					发光口面:			遮光角:

表--1									单位: ×10cd									
C (DEG) γ (DEG)		0	45	90	135	180	225	270	315									
0		2280	2266	2251	2237	2280	2266	2251	2237									
5		2276	2255	2233	2218	2276	2260	2248	2243									
10		2263	2231	2192	2181	2262	2241	2227	2234									
15		2243	2189	2126	2124	2240	2208	2182	2209									
20		2214	2127	2033	2051	2210	2154	2105	2173									
25		2176	2046	1899	1948	2172	2077	1978	2114									
30		2126	1933	1709	1809	2123	1961	1772	2031									
35		2061	1776	1454	1613	2064	1774	1488	1902									
40		1983	1545	1152	1329	1996	1494	1164	1687									
45		1892	1204	708	951	1917	1128	732	1353									
50		1783	706	191	369	1824	582	199	912									
55		1661	107	86.5	95.0	1717	90.4	68.4	202									
60		1534	83.7	65.3	78.4	1606	66.1	49.5	71.9									
65		1129	69.2	48.7	61.5	1328	52.3	34.1	60.1									
70		594	49.4	31.8	43.7	779	34.8	20.8	43.7									
75		240	34.3	22.4	27.0	343	21.7	13.5	27.4									
80		81.8	20.9	16.2	18.9	113	11.8	9.91	14.0									
85		30.3	15.7	12.5	15.1	31.7	8.72	7.16	9.34									
90		20.8	13.6	10.9	12.6	12.3	8.62	7.31	8.27									
95		18.0	12.0	9.66	11.0	10.2	8.34	7.65	9.00									
100		16.7	11.9	8.89	10.8	11.1	8.96	8.33	10.0									
105		16.2	12.6	8.96	11.2	12.3	10.00	9.22	11.2									
110		16.4	13.7	9.73	11.9	13.7	11.1	10.3	12.6									
115		17.1	15.1	10.8	12.8	15.3	12.2	11.4	14.1									
120		18.2	16.8	12.2	13.9	17.1	13.4	12.5	15.8									
125		19.6	18.7	13.8	15.2	18.8	14.5	13.7	18.2									
130		21.0	21.2	15.5	16.5	20.5	15.7	15.5	20.5									
135		22.5	23.4	17.3	18.1	22.1	17.2	17.7	22.5									
140		24.1	25.0	19.5	19.9	23.8	18.9	19.9	24.2									
145		25.6	26.2	21.8	21.8	25.6	20.6	21.8	25.8									
150		27.1	27.5	24.0	23.9	27.4	22.6	23.8	27.2									
155		28.6	28.7	26.1	26.0	29.2	24.8	25.8	28.6									
160		29.9	30.0	28.1	28.0	30.7	27.4	28.0	30.1									
165		31.1	31.2	30.0	29.8	31.8	29.4	30.4	31.5									
170		32.1	32.1	31.6	31.2	32.5	31.0	32.3	32.5									
175		32.7	32.7	33.0	32.5	32.9	32.0	33.4	33.1									
180		33.0	32.8	33.7	33.1	33.1	32.6	33.8	33.2									

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-06-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 9.250米 [K=1.0000]
备注: