


室内灯具光度数据

实测参数: U:218.44V I:1.1492A P:243.81W PF:0.9712 Freq:50.47Hz 实检光通:44864.2x1 lm					
灯具名称:		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面:		遮光角:	

光源数据		光度数据				光效: 184.01 lm/W
型号		峰值光强(cd)	18938	S/MH(C0/180)	1.34	
标称功率(W)	250	灯具效率(%)	100.0	S/MH(C90/270)	1.30	
额定电源电压(V)	220	总光通量(lm)	44864	η UP,DN(C0-180)	1.5,49.3	
额定光通量(lm)	44864.2	CIE分类	直接	η UP,DN(C180-360)	0.9,48.3	
灯具内光源数(只)	1	上射光通比(%)	2.4	CIBSE SHR NOM	1.50	
实测电源电压(V)	220	下射光通比(%)	97.6	CIBSE SHR MAX	1.50	

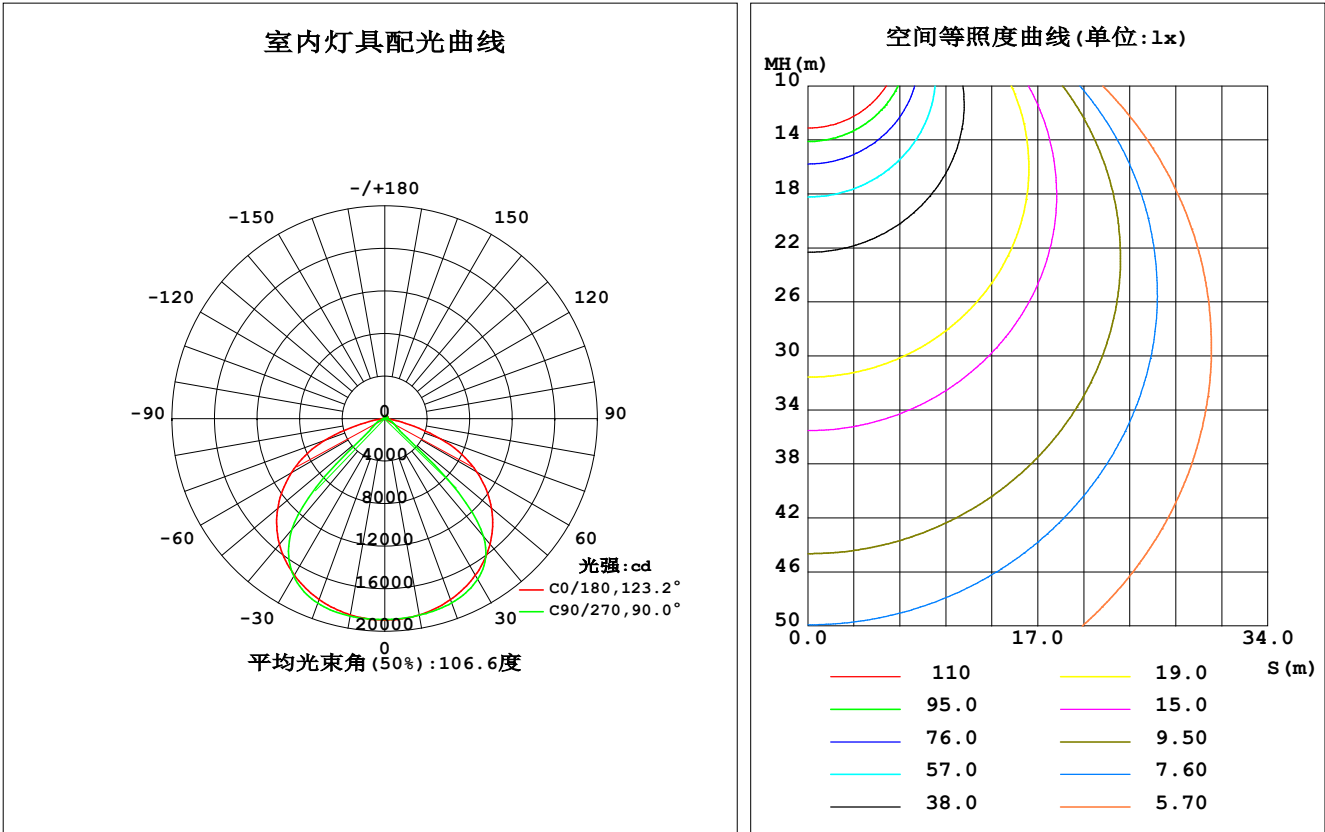

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.200米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	1874	1876	1877	1868	1873	1880	1884	1879	0- 10	1798	1798	4.01,4.01
20	1810	1832	1843	1819	1809	1835	1846	1838	10- 20	5254	7052	15.7,15.7
30	1702	1746	1746	1731	1701	1737	1712	1740	20- 30	8242	15294	34.1,34.1
40	1541	1580	1442	1561	1541	1528	1357	1527	30- 40	10231	25525	56.9,56.9
50	1309	1094	214.2	1064	1314	1003	248.4	969.3	40- 50	9618	35142	78.3,78.3
60	996.7	122.3	102.6	116.7	1012	99.54	102.2	100.5	50- 60	4712	39854	88.8,88.8
70	558.7	65.49	45.56	62.55	609.0	44.76	29.16	45.16	60- 70	2561	42416	94.5,94.5
80	107.9	33.67	26.44	31.62	119.0	14.56	11.23	14.53	70- 80	1116	43532	97,97
90	21.98	19.65	16.70	18.62	5.510	4.063	2.920	4.307	80- 90	242.9	43775	97.6,97.6
100	22.37	19.43	16.72	18.12	7.374	5.880	4.822	6.375	90-100	131.6	43907	97.9,97.9
110	22.55	20.36	17.82	18.87	10.05	8.498	7.572	9.258	100-110	142.3	44049	98.2,98.2
120	23.16	22.00	19.60	20.34	12.91	11.50	10.74	12.48	110-120	153.2	44202	98.5,98.5
130	24.15	23.71	21.74	21.78	15.68	14.21	14.11	15.52	120-130	159.1	44361	98.9,98.9
140	25.27	25.18	23.33	22.81	18.20	16.49	16.83	18.25	130-140	153.5	44515	99.2,99.2
150	26.78	26.40	24.41	24.42	20.95	19.31	19.01	20.68	140-150	136.4	44651	99.5,99.5
160	28.56	27.93	26.48	26.87	24.16	23.00	22.33	23.63	150-160	110.7	44762	99.8,99.8
170	29.80	29.23	28.76	28.75	27.35	26.45	26.38	26.72	160-170	75.33	44837	99.9,99.9
180	29.65	28.97	29.05	28.76	29.66	28.95	29.11	28.77	170-180	27.17	44864	100,100
单位:°	光强:×10cd									单位:lm		

锥面光通量(90度)：30731 lm

%lum = 68.5%
%lamp = 68.5%

锥面光通量(120度)：39854 lm


%lum = 88.8%
%lamp = 88.8%

C角度范围： 0度 - 360度
C角度间隔： 45.0度
测试速度：快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-12-02

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统：远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.200米 [K=1.0000]
备注：

灯具亮度限制曲线

实测参数: U:218.44V I:1.1492A P:243.81W PF:0.9712 Freq:50.47Hz 实检光通:44864.2x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

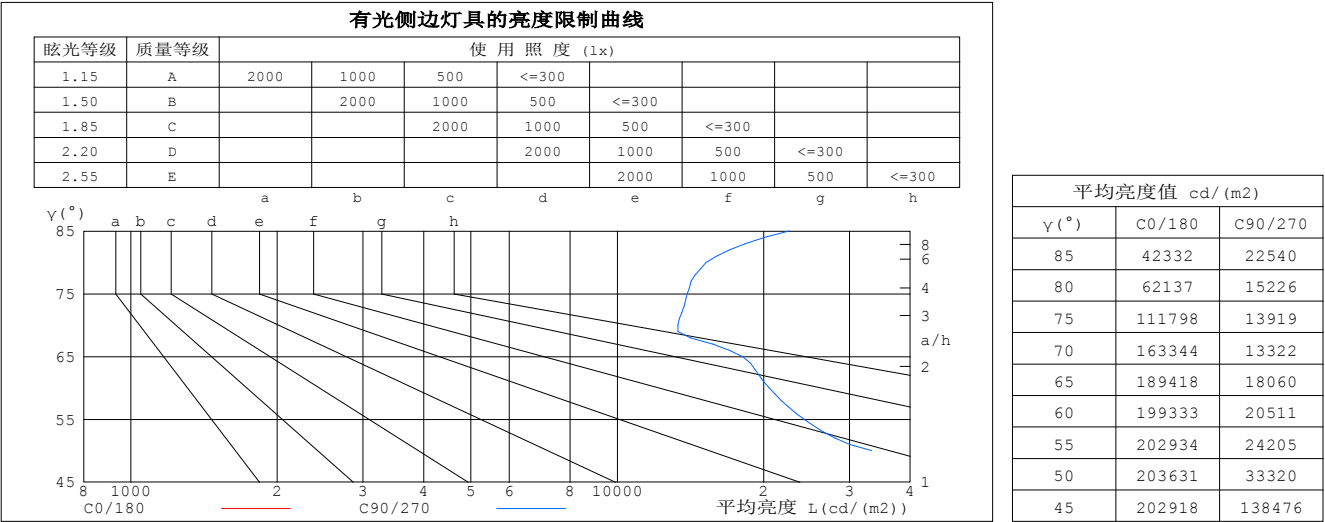


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.200米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:218.44V I:1.1492A P:243.81W PF:0.9712 Freq:50.47Hz 实检光通:44864.2x1 lm															
灯具名称:				灯具类型:				灯具重量:							
灯具规格:				外型尺寸:				测试编号:							
制造厂商: EVERFINE				发光口面:				遮光角:							

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.06	1.03	.00	1.04	1.01	.98	.99	.97	.94	.95	.93	.91	.91	.90	.88	.86
2.0	.95	.89	.85	.93	.88	.83	.89	.85	.81	.86	.82	.79	.82	.79	.77	.75
3.0	.85	.78	.73	.83	.77	.72	.80	.75	.70	.77	.73	.69	.75	.71	.67	.65
4.0	.77	.69	.63	.75	.68	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.61	.55	.68	.60	.55	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.63	.55	.49	.62	.54	.49	.60	.53	.48	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.44	.56	.49	.43	.55	.48	.43	.53	.47	.43	.52	.46	.42	.40
8.0	.52	.45	.39	.52	.44	.39	.50	.43	.39	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.35	.44	.38	.34	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.41	.35	.31	.30

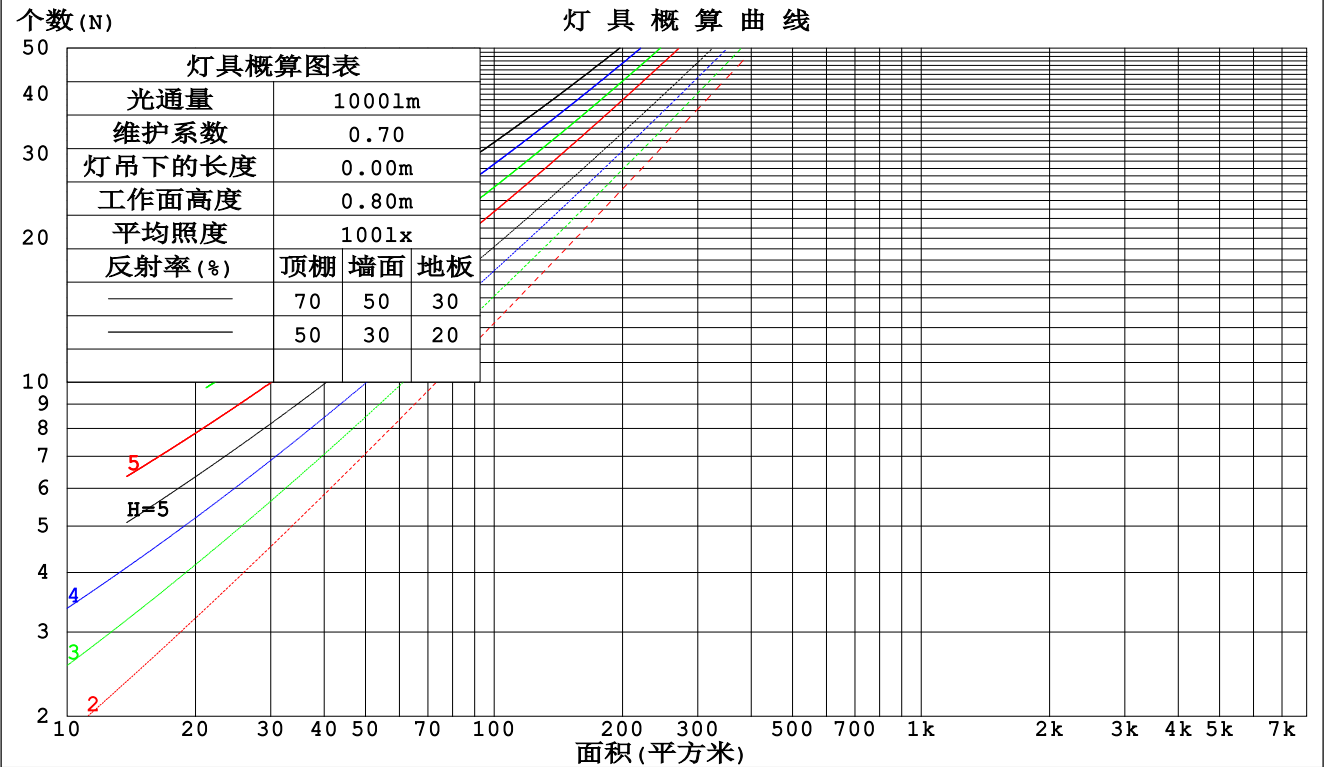

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.200米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:218.44V I:1.1492A P:243.81W PF:0.9712 Freq:50.47Hz 实检光通:44864.2x1 lm					
灯具名称:		灯具类型:		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面:		遮光角:	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.250	.142	.045	.243	.138	.044	.228	.131	.042	.215	.124	.040	.203	.118	.038	
2.0	.242	.133	.041	.235	.130	.040	.223	.124	.038	.211	.119	.037	.201	.113	.036	
3.0	.229	.122	.037	.223	.120	.036	.212	.115	.035	.202	.111	.034	.193	.107	.033	
4.0	.216	.112	.033	.211	.110	.033	.201	.107	.032	.192	.103	.031	.184	.100	.030	
5.0	.203	.104	.030	.199	.102	.030	.190	.099	.029	.182	.096	.029	.174	.093	.028	
6.0	.191	.096	.027	.187	.095	.027	.179	.092	.027	.172	.089	.026	.165	.087	.026	
7.0	.180	.089	.025	.177	.088	.025	.170	.086	.025	.163	.084	.024	.157	.081	.024	
8.0	.170	.083	.023	.167	.082	.023	.161	.080	.023	.155	.078	.023	.149	.076	.022	
9.0	.161	.078	.022	.158	.077	.022	.152	.075	.021	.147	.074	.021	.142	.072	.021	
10.0	.153	.073	.020	.150	.072	.020	.145	.071	.020	.140	.069	.020	.135	.068	.019	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.209	.209	.209	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.195	.175	.158	.167	.150	.136	.114	.104	.094	.066	.060	.055	.021	.019	.018	
2.0	.184	.151	.123	.158	.130	.106	.108	.090	.074	.062	.052	.043	.020	.017	.014	
3.0	.176	.133	.099	.150	.115	.086	.103	.080	.060	.060	.047	.035	.019	.015	.012	
4.0	.168	.119	.082	.144	.103	.071	.099	.072	.050	.057	.042	.030	.018	.014	.010	
5.0	.160	.109	.070	.138	.094	.061	.095	.066	.043	.055	.039	.026	.018	.013	.008	
6.0	.154	.100	.061	.132	.087	.053	.091	.061	.038	.053	.036	.022	.017	.012	.007	
7.0	.148	.093	.055	.127	.081	.048	.088	.057	.034	.051	.033	.020	.016	.011	.007	
8.0	.142	.087	.050	.122	.076	.043	.084	.053	.031	.049	.031	.018	.016	.010	.006	
9.0	.136	.082	.046	.117	.071	.040	.081	.050	.028	.047	.030	.017	.015	.010	.006	
10.0	.131	.078	.043	.113	.068	.037	.078	.048	.027	.046	.028	.016	.015	.009	.005	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.200米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:218.44V I:1.1492A P:243.81W PF:0.9712 Freq:50.47Hz 实检光通:44864.2x1 lm											
灯具名称:			灯具类型:			灯具重量:					
灯具规格:			外型尺寸:			测试编号:					
制造厂商: EVERFINE			发光口面:			遮光角:					
反射比:	天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
	墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
	工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸		交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	2H	17.7	19.0	18.0	19.2	19.5	13.3	14.7	13.6	14.9	15.1
	3H	19.1	20.3	19.4	20.5	20.8	13.2	14.4	13.5	14.7	15.0
	4H	19.4	20.6	19.8	20.9	21.2	13.2	14.3	13.5	14.6	14.9
	6H	19.5	20.6	19.9	20.9	21.2	13.1	14.2	13.5	14.5	14.8
	8H	19.5	20.6	19.9	20.9	21.2	13.1	14.1	13.5	14.4	14.8
	12H	19.5	20.5	19.9	20.8	21.2	13.1	14.1	13.5	14.4	14.8
4H	2H	17.4	18.6	17.8	18.9	19.1	13.4	14.5	13.7	14.8	15.1
	3H	19.0	20.0	19.4	20.3	20.6	13.3	14.3	13.7	14.6	15.0
	4H	19.4	20.3	19.8	20.7	21.0	13.3	14.2	13.7	14.5	14.9
	6H	19.6	20.4	20.0	20.8	21.2	13.3	14.1	13.7	14.5	14.9
	8H	19.6	20.3	20.0	20.7	21.2	13.3	14.0	13.7	14.4	14.9
	12H	19.6	20.3	20.1	20.7	21.1	13.3	14.0	13.8	14.4	14.9
8H	4H	19.3	20.0	19.7	20.4	20.9	13.4	14.1	13.8	14.5	14.9
	6H	19.5	20.1	20.0	20.5	21.0	13.4	14.0	13.9	14.5	14.9
	8H	19.5	20.1	20.0	20.5	21.0	13.5	14.0	14.0	14.5	15.0
	12H	19.6	20.0	20.1	20.5	21.0	13.6	14.0	14.1	14.5	15.0
12H	4H	19.3	19.9	19.7	20.3	20.8	13.4	14.0	13.8	14.5	14.9
	6H	19.5	20.0	20.0	20.4	20.9	13.4	14.0	13.9	14.4	14.9
	8H	19.5	20.0	20.0	20.4	21.0	13.5	14.0	14.0	14.5	15.0
不同间隔布灯时,观察者位置引起的UGR变化:											
S = 1.0H		+ 0.3 / - 0.5					+ 2.1 / - 4.5				
1.5H		+ 0.5 / - 1.6					+ 1.8 / - 5.1				
2.0H		+ 1.6 / - 3.1					+ 4.4 / - 4.0				

依据CIE Pub.117计算, 44864lm光源光通表格中的数据需要进行修正(8log(F/F0) = 13.2)。
出光口面积: 0.1 m2

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.200米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:218.44V I:1.1492A P:243.81W PF:0.9712 Freq:50.47Hz 实检光通:44864.2x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	64	54	48	64	54	48	62	53	48	42
0.80	75	65	58	74	64	58	72	63	58	51
1.00	83	73	67	82	73	67	79	73	66	60
1.25	89	81	75	88	80	74	85	78	73	67
1.50	94	86	80	92	85	79	89	83	78	71
2.00	100	93	87	98	91	87	94	89	85	78
2.50	103	96	91	101	95	90	97	92	88	80
3.00	105	100	95	103	98	94	99	95	92	83
4.00	108	104	100	106	102	98	102	98	95	87
5.00	110	106	103	108	104	101	103	100	98	88
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHR _{NOM} = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.200米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:218.44V I:1.1492A P:243.81W PF:0.9712 Freq:50.47Hz 实检光通:44864.2x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

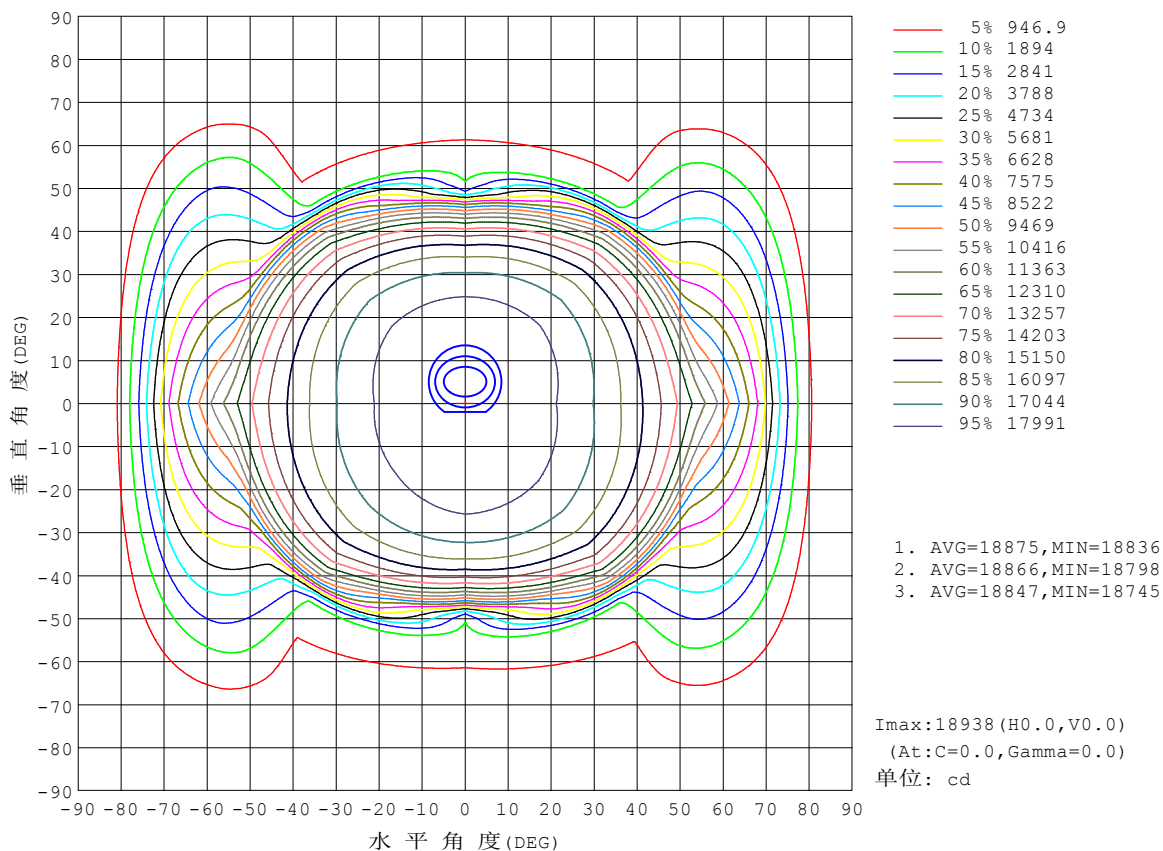


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-12-02

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.200米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:218.44V I:1.1492A P:243.81W PF:0.9712 Freq:50.47Hz 实检光通:44864.2x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

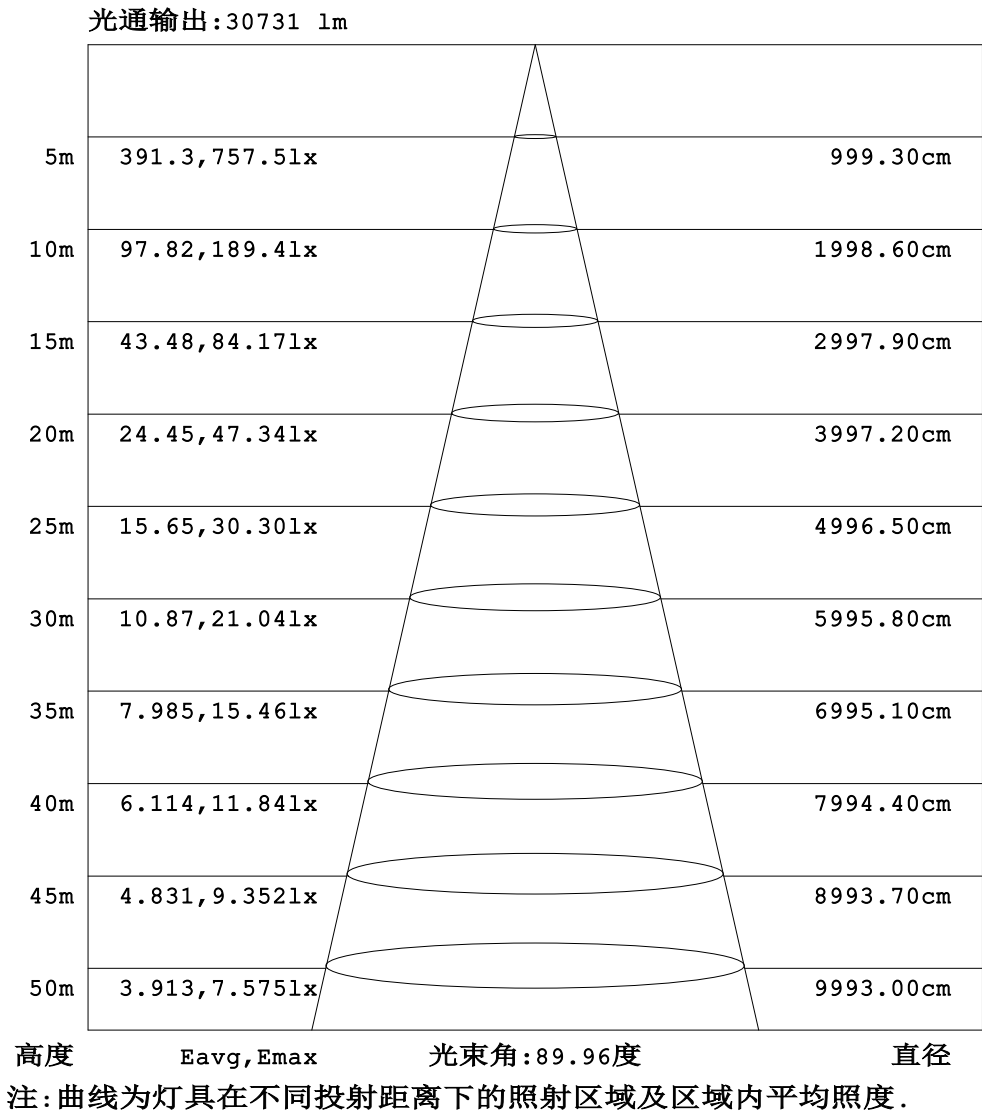


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.200米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:218.44V I:1.1492A P:243.81W PF:0.9712 Freq:50.47Hz 实检光通:44864.2x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:

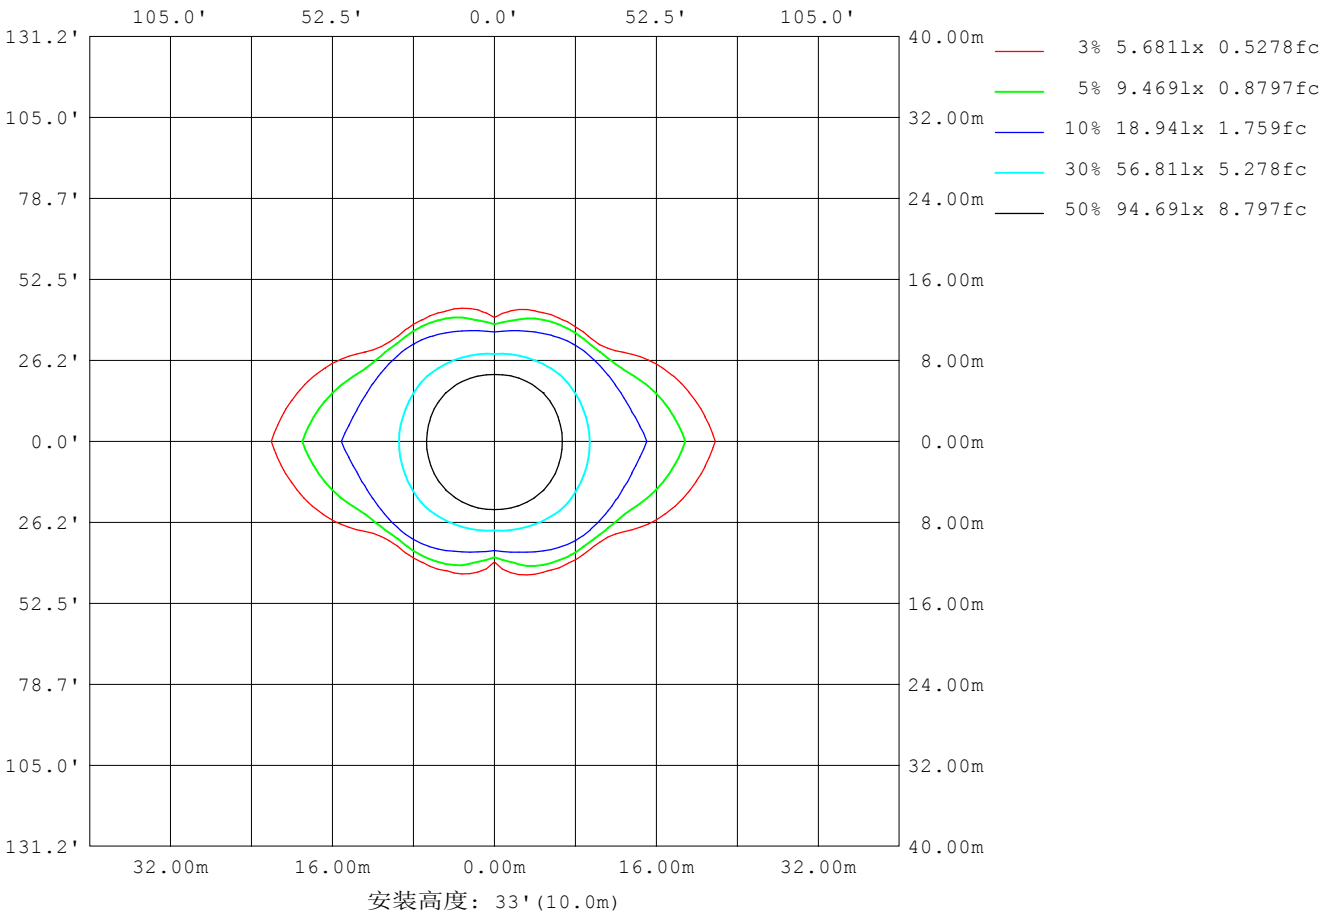

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.200米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:218.44V I:1.1492A P:243.81W PF:0.9712 Freq:50.47Hz 实检光通:44864.2x1 lm		
灯具名称:	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面:	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	192695
L横 (75) av	119430
L横 (85) av	38043
L纵 (65) av	17697
L纵 (75) av	10957
L纵 (85) av	14379
L45 (65) av	18107
L45 (75) av	13047
L45 (85) av	18436

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.200米 [K=1.0000]
备注:

平面照度曲线

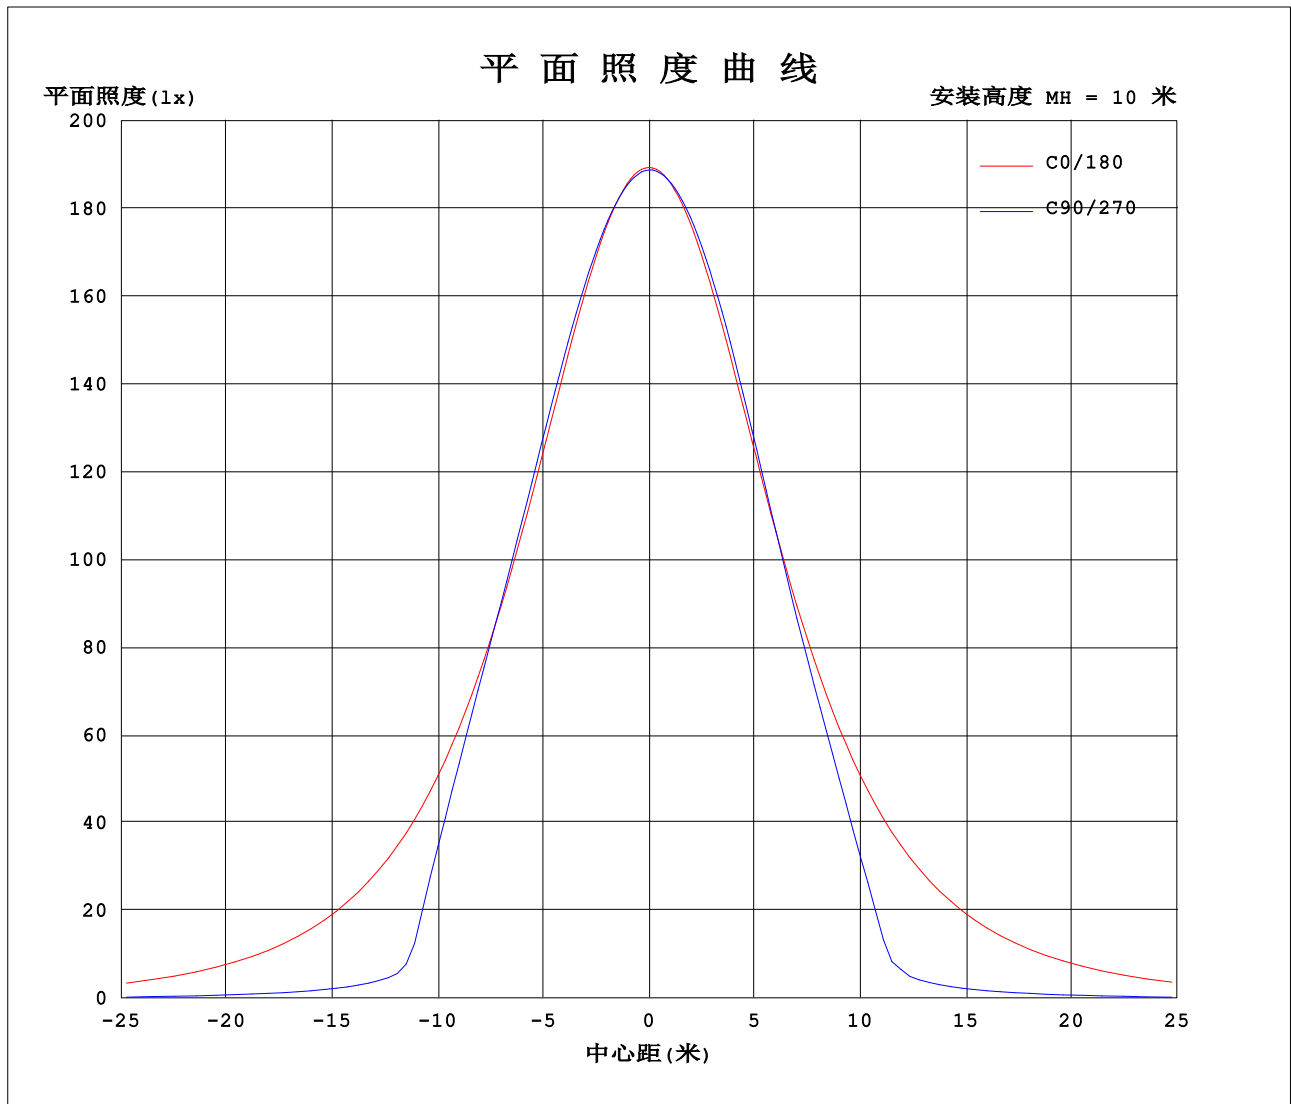

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: Jason
测试日期: 2025-12-02

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度: 65.0%
测试距离: 7.200米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:218.44V I:1.1492A P:243.81W PF:0.9712 Freq:50.47Hz 实检光通:44864.2x1 lm								
灯具名称:				灯具类型:				灯具重量:
灯具规格:				外型尺寸:				测试编号:
制造厂商: EVERFINE				发光口面:				遮光角:

表--1									单位: ×10cd									
γ (DEG) \ C (DEG)	0	45	90	135	180	225	270	315										
0	1894	1892	1888	1886	1894	1892	1888	1886										
5	1889	1888	1885	1881	1888	1889	1889	1886										
10	1874	1876	1877	1868	1873	1880	1884	1879										
15	1847	1858	1864	1847	1846	1862	1873	1863										
20	1810	1832	1843	1819	1809	1835	1846	1838										
25	1761	1795	1807	1781	1760	1795	1796	1798										
30	1702	1746	1746	1731	1701	1737	1712	1740										
35	1629	1678	1643	1661	1628	1652	1577	1654										
40	1541	1580	1442	1561	1541	1528	1357	1527										
45	1435	1424	979	1403	1437	1340	917	1332										
50	1309	1094	214	1064	1314	1003	248	969										
55	1164	311	139	272	1172	246	142	204										
60	997	122	103	117	1012	99.5	102	101										
65	801	88.5	76.3	84.5	828	66.1	73.3	66.9										
70	559	65.5	45.6	62.5	609	44.8	29.2	45.2										
75	289	44.5	36.0	42.4	329	24.9	20.7	23.2										
80	108	33.7	26.4	31.6	119	14.6	11.2	14.5										
85	36.9	24.9	19.6	23.0	29.4	8.01	5.42	8.41										
90	22.0	19.6	16.7	18.6	5.51	4.06	2.92	4.31										
95	22.2	19.4	16.5	18.1	6.19	4.82	3.71	5.13										
100	22.4	19.4	16.7	18.1	7.37	5.88	4.82	6.38										
105	22.4	19.8	17.2	18.4	8.67	7.13	6.12	7.76										
110	22.5	20.4	17.8	18.9	10.0	8.50	7.57	9.26										
115	22.8	21.1	18.6	19.5	11.5	9.97	9.12	10.8										
120	23.2	22.0	19.6	20.3	12.9	11.5	10.7	12.5										
125	23.6	22.9	20.6	21.2	14.3	13.0	12.4	14.1										
130	24.1	23.7	21.7	21.8	15.7	14.2	14.1	15.5										
135	24.7	24.4	22.6	22.3	17.0	15.3	15.6	16.9										
140	25.3	25.2	23.3	22.8	18.2	16.5	16.8	18.3										
145	26.0	25.8	23.9	23.4	19.5	17.7	18.0	19.5										
150	26.8	26.4	24.4	24.4	21.0	19.3	19.0	20.7										
155	27.7	27.1	25.2	25.6	22.5	21.1	20.4	22.0										
160	28.6	27.9	26.5	26.9	24.2	23.0	22.3	23.6										
165	29.3	28.7	27.8	28.0	25.8	24.8	24.4	25.2										
170	29.8	29.2	28.8	28.8	27.4	26.4	26.4	26.7										
175	29.9	29.4	29.2	28.9	28.7	27.8	28.0	27.9										
180	29.7	29.0	29.1	28.8	29.7	29.0	29.1	28.8										

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:Jason
测试日期:2025-12-02

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.411
环境湿度:65.0%
测试距离:7.200米 [K=1.0000]
备注: