

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3122.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	-3.0 degrees horizontal

Beam Spread	At 10% of Imax	54.2V x 53.2H
	At 50% of Imax	24.0V x 22.7H
	At 90% of Imax	10.9V x 9.0H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	702.4 lumens per klm.
	To 50% of Imax	291.3 lumens per klm.
	To 90% of Imax	74.4 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2024-11-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:234.53V I:1.3899A P:320.42W PF:0.9829 Freq:50.04Hz Lamp Flux:56326x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

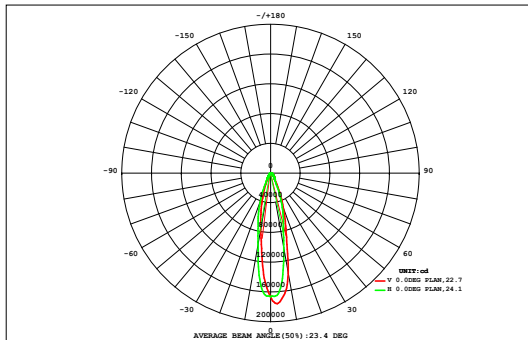

DATA OF LAMP		Eff:175.79lm/W	
MODEL		Imax(cd)	175875
NOMINAL POWER(W)	320	AVAILABILITY(%)	70.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	39697
NOMINAL FLUX(lm)	56326	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	56326
TEST VOLTAGE(V)	220	θ @50% (H,V)	23,24DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.68	2.14	3.72	5.32	6.85	8.20	9.24	9.86	10.0	9.70	8.93	7.82	6.46	4.99	3.55	2.26	1.21	0.38	101	0.00
90	0.68	2.14	3.72	5.32	6.85	8.20	9.24	9.86	10.0	9.70	8.93	7.82	6.46	4.99	3.55	2.26	1.21	0.38	101	0.00
80	0.77	2.80	5.60	9.14	13.0	16.8	19.9	22.0	22.9	22.4	20.5	17.6	13.9	10.0	6.54	3.68	1.59	0.40	209	0.00
70	0.86	3.56	8.14	14.2	20.7	27.1	32.7	36.7	38.5	37.9	35.2	30.5	24.4	17.5	10.8	5.53	2.20	0.44	347	0.00
60	0.95	4.47	10.8	18.8	28.2	39.7	51.9	62.1	67.0	65.6	58.6	47.2	35.3	24.9	15.8	7.78	2.82	0.50	542	0.00
50	1.04	5.38	13.0	23.5	39.8	62.2	86.7	108	118	115	99.1	77.2	53.9	33.6	20.1	10.2	3.45	0.57	870	0.00
40	1.12	6.17	14.9	29.7	55.7	93.8	146	201	231	223	183	125	77.8	46.1	24.5	12.2	4.07	0.63	1475	0.00
30	1.20	6.76	16.7	36.8	73.8	140	246	454	682	630	367	202	111	58.7	29.3	13.7	4.60	0.67	3074	1254
	1.25	7.17	18.3	42.9	92.5	190	478	1234	1963	1768	929	323	147	69.7	33.5	14.9	4.97	0.70	7318	6174
	1.28	7.39	19.3	46.7	106	235	778	2183	4171	3381	1437	452	170	76.5	35.7	15.4	5.15	0.72	13122	12126
	1.28	7.41	19.4	47.0	107	237	785	2193	4220	3430	1446	459	172	77.4	36.0	15.5	5.17	0.72	13259	12262
	1.25	7.22	18.5	43.6	94.9	195	493	1264	2003	1808	960	338	152	72.1	34.2	15.1	5.02	0.71	7506	6374
	1.20	6.84	17.0	37.8	76.6	148	257	485	740	688	398	214	118	61.6	30.3	14.1	4.68	0.68	3299	1507
-30	1.13	6.26	15.3	30.9	58.4	101	160	220	256	248	202	139	84.6	48.8	25.7	12.6	4.16	0.63	1613	0.00
-40	1.05	5.48	13.4	24.6	42.3	67.0	95.5	123	140	136	114	86.0	58.7	36.2	21.2	10.6	3.55	0.58	979	0.00
-50	0.96	4.56	11.2	19.7	30.2	43.4	57.8	70.3	77.4	76.1	66.8	53.1	39.0	26.9	16.7	8.17	2.91	0.51	606	0.00
-60	0.87	3.65	8.45	15.0	22.3	29.6	36.4	41.8	44.8	44.3	40.3	34.2	26.9	19.1	11.6	5.84	2.28	0.45	388	0.00
-70	0.78	2.88	5.83	9.68	14.1	18.4	22.3	25.2	26.7	26.2	23.7	20.0	15.5	11.0	7.08	3.92	1.66	0.41	235	0.00
-80	0.68	2.20	3.90	5.68	7.44	9.07	10.4	11.4	11.8	11.5	10.4	9.00	7.33	5.58	3.90	2.43	1.28	0.38	114	0.00
-90	0.68	2.20	3.90	5.68	7.44	9.07	10.4	11.4	11.8	11.5	10.4	9.00	7.33	5.58	3.90	2.43	1.28	0.38	114	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	18.4	92.4	224	461	890	1661	3768	8745	14823	12719	6398	2634	1315	701	366	174	60.8	10.1	55058	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	1988	7331	13470	11372	4922	614	0.00	0.00	0.00	0.00	0.00	0.00	---	39697

one-half-peak spread: U:10.3,D:10.0 , L:11.2,R:11.7


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2024-11-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:234.53V I:1.3899A P:320.42W PF:0.9829 Freq:50.04Hz Lamp Flux:56326x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

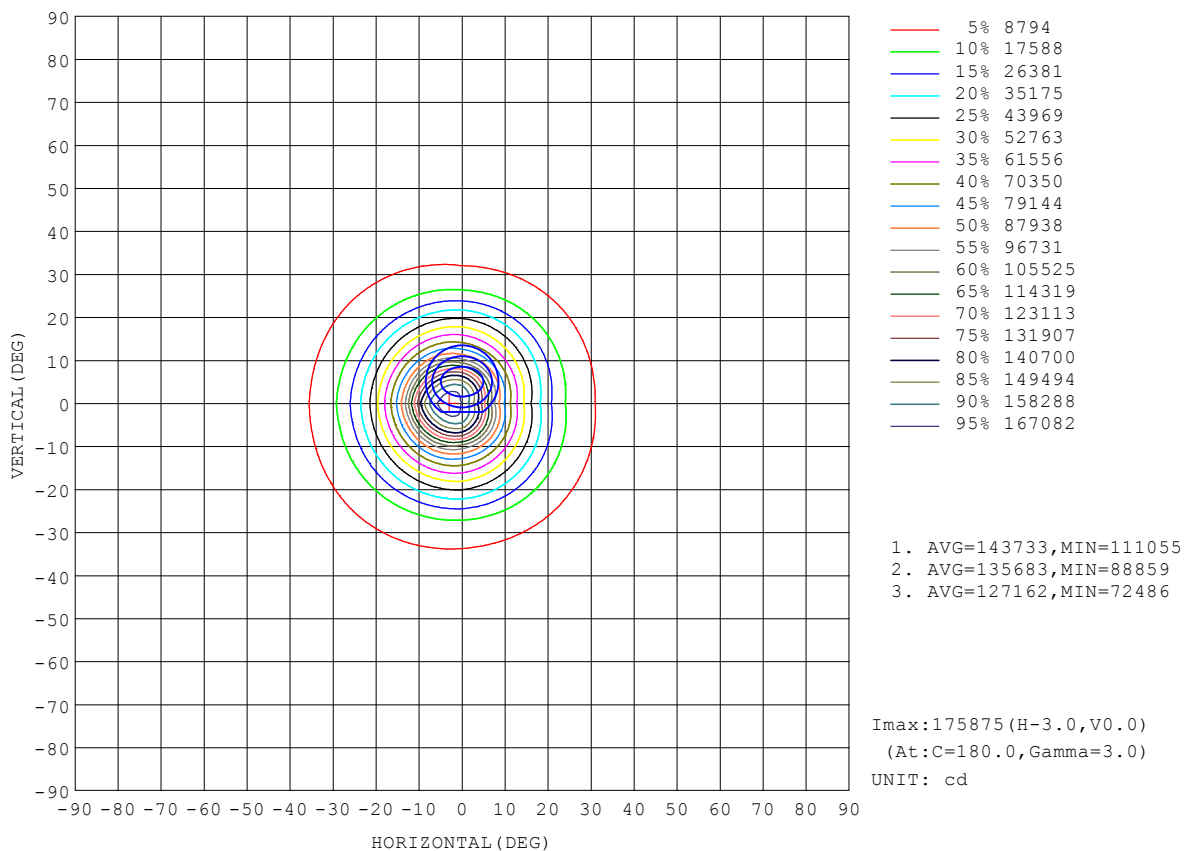


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2024-11-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:234.53V I:1.3899A P:320.42W PF:0.9829 Freq:50.04Hz Lamp Flux:56326x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

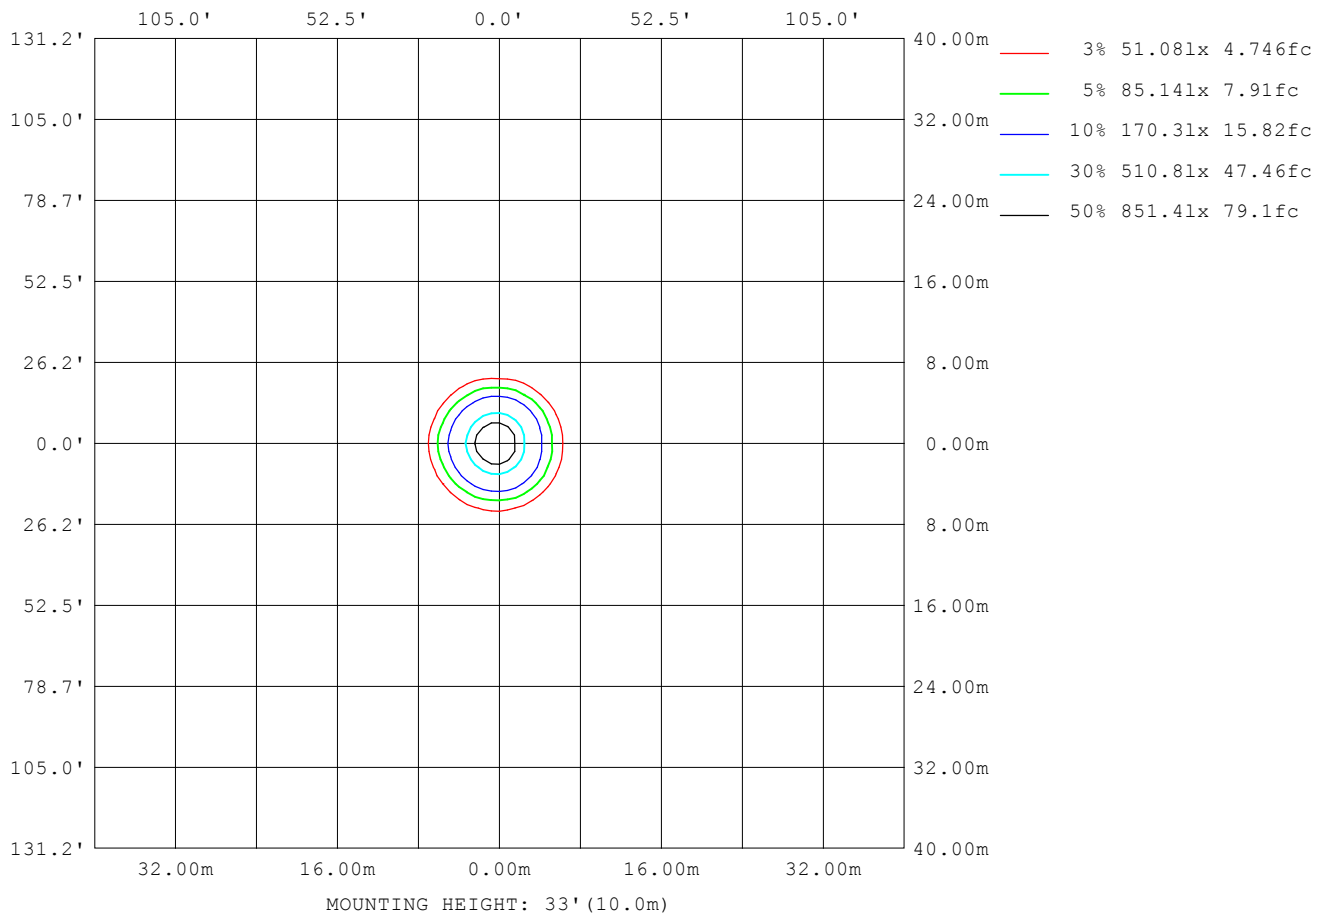

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2024-11-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

Planar Illuminance Curve

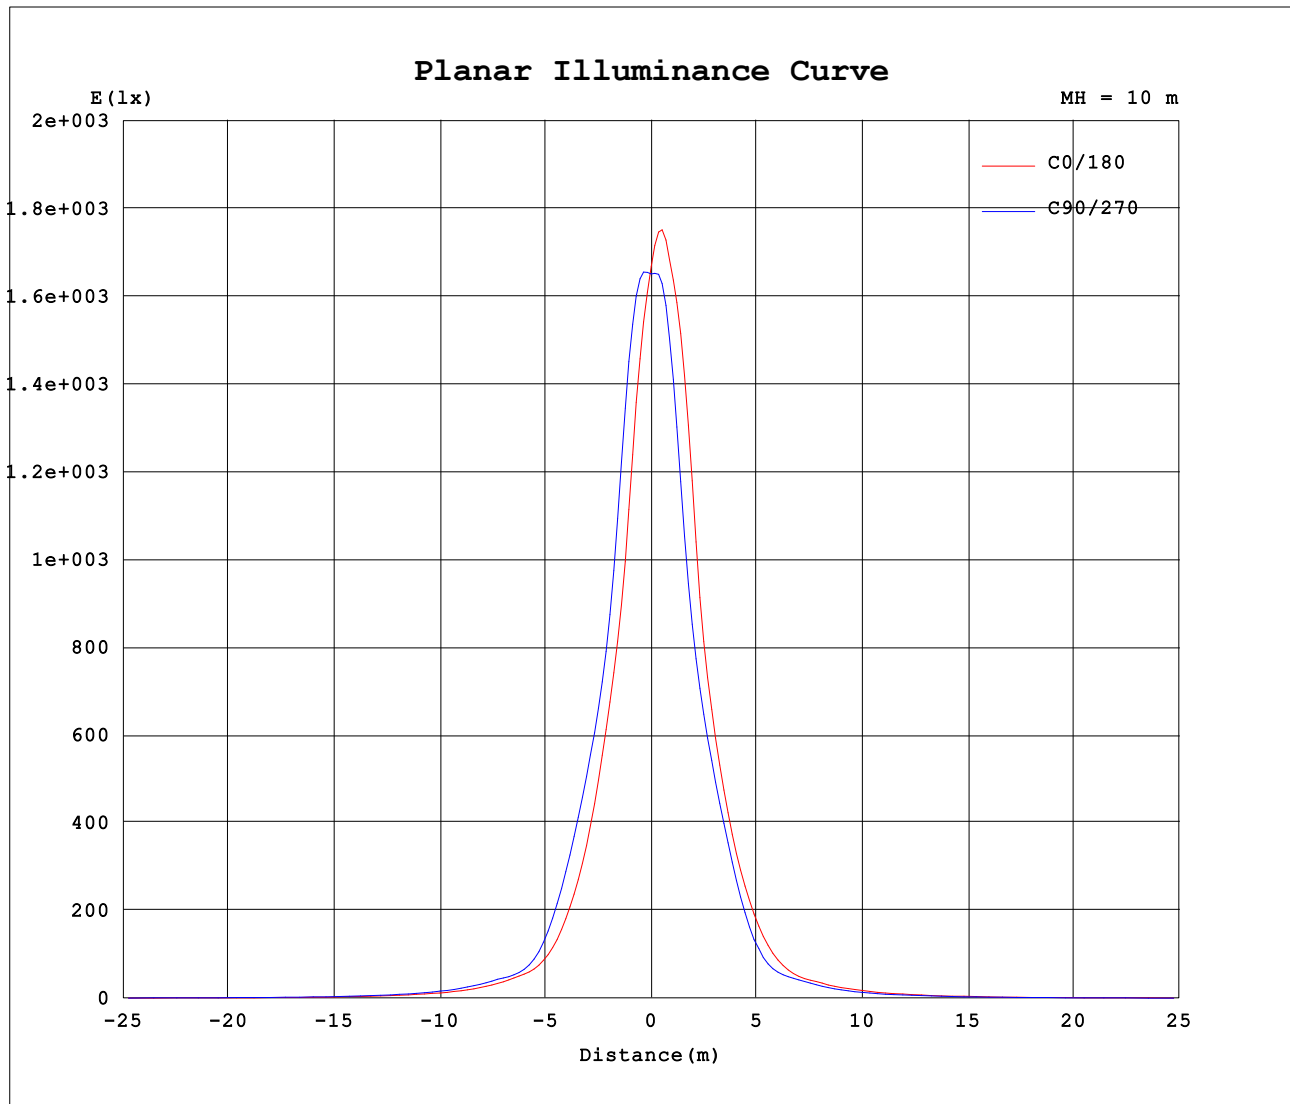


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2024-11-19

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:234.53V I:1.3899A P:320.42W PF:0.9829 Freq:50.04Hz Lamp Flux:56326x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

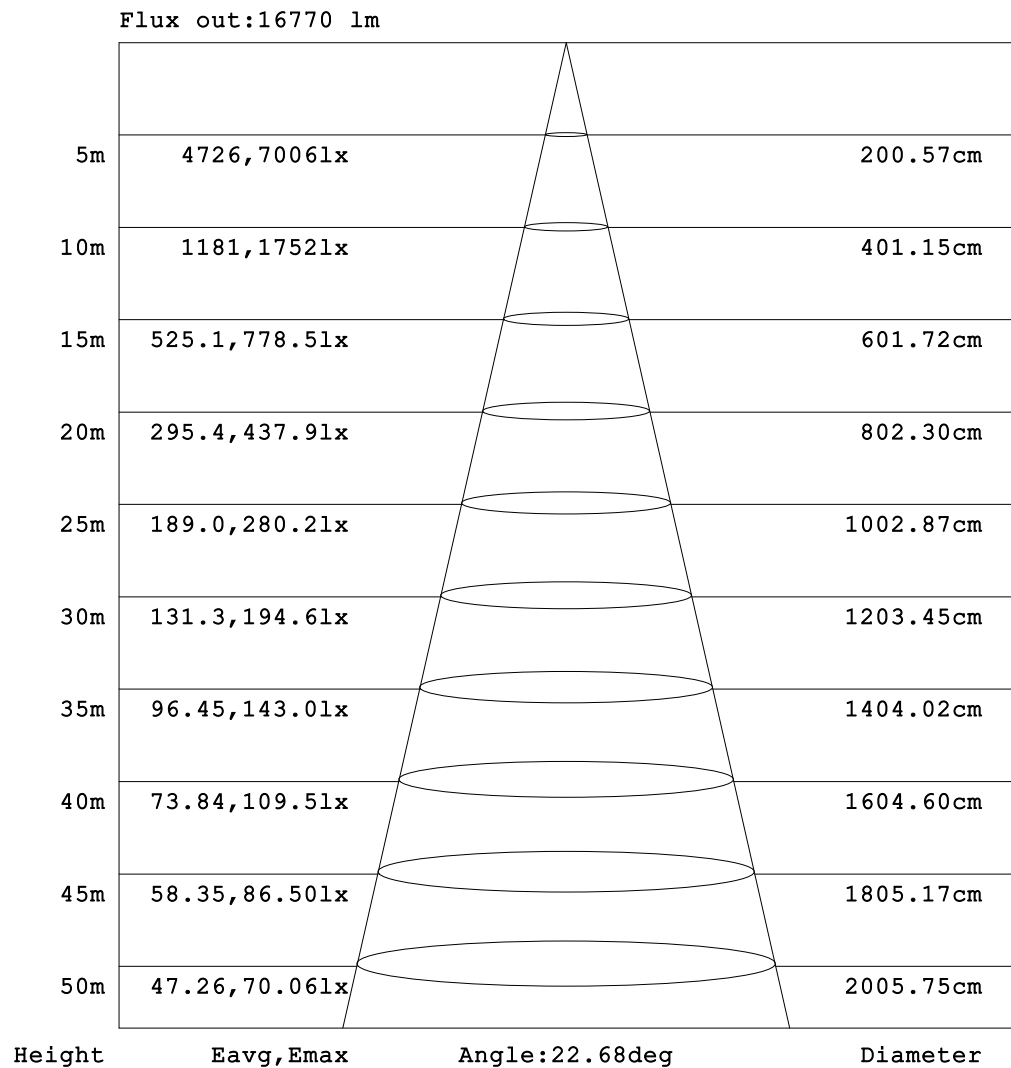

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2024-11-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:234.53V I:1.3899A P:320.42W PF:0.9829 Freq:50.04Hz Lamp Flux:56326x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×100cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.40	1.37	1.27	1.12	1.09	1.13	1.22	1.39	1.65	2.02	2.48	2.96	3.38	3.76	4.10	4.38	4.59	4.81	4.93
-170	2.40	1.38	1.27	1.13	1.09	1.12	1.21	1.36	1.60	1.94	2.38	2.88	3.35	3.77	4.14	4.41	4.61	4.75	4.86
-160	2.40	1.39	1.27	1.16	1.09	1.11	1.17	1.29	1.47	1.74	2.10	2.53	3.00	3.44	3.83	4.17	4.41	4.58	4.70
-150	2.40	1.41	1.28	1.20	1.09	1.10	1.14	1.21	1.32	1.49	1.73	2.01	2.35	2.71	3.07	3.39	3.64	3.81	3.91
-140	2.40	1.44	1.29	1.27	1.11	1.09	1.10	1.14	1.19	1.28	1.39	1.54	1.71	1.90	2.08	2.25	2.39	2.49	2.52
-130	2.40	1.52	1.32	1.29	1.21	1.10	1.09	1.10	1.12	1.15	1.19	1.23	1.29	1.36	1.42	1.48	1.53	1.56	1.56
-120	2.40	1.68	1.40	1.32	1.30	1.23	1.13	1.09	1.09	1.09	1.10	1.11	1.13	1.14	1.15	1.16	1.16	1.17	1.17
-110	2.40	1.89	1.51	1.40	1.35	1.34	1.31	1.27	1.19	1.14	1.10	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
-100	2.40	2.13	1.89	1.68	1.53	1.47	1.45	1.43	1.42	1.42	1.42	1.43	1.43	1.43	1.42	1.41	1.40	1.40	1.40
-90	2.40	2.39	2.38	2.37	2.36	2.35	2.34	2.33	2.32	2.31	2.30	2.29	2.27	2.26	2.25	2.24	2.23	2.22	2.21
-80	2.40	2.67	2.94	3.20	3.45	3.71	3.96	4.21	4.47	4.72	4.98	5.20	5.39	5.54	5.69	5.79	5.85	5.88	5.86
-70	2.40	2.94	3.48	4.03	4.66	5.44	6.21	7.01	7.77	8.47	9.12	9.74	10.3	10.8	11.1	11.5	11.7	11.8	11.9
-60	2.40	3.20	4.00	5.04	6.29	7.61	8.87	10.0	11.1	12.0	13.1	14.1	15.1	16.1	17.0	17.8	18.4	18.7	18.7
-50	2.40	3.43	4.56	6.18	7.96	9.59	11.0	12.5	14.2	16.2	18.8	21.5	24.1	26.9	29.4	31.3	32.7	33.5	33.7
-40	2.40	3.63	5.19	7.26	9.33	11.1	13.0	15.4	18.9	23.0	27.6	32.6	38.0	43.9	50.3	56.0	60.7	63.7	64.5
-30	2.40	3.80	5.73	8.17	10.3	12.3	15.1	19.4	24.5	30.8	38.5	48.6	60.6	73.5	84.9	95.3	108	117	118
-20	2.40	3.92	6.13	8.82	11.0	13.5	17.3	23.1	29.9	39.1	52.3	68.6	86.2	117	181	275	367	429	445
-10	2.40	4.00	6.40	9.19	11.4	14.3	19.2	25.5	34.0	46.3	63.2	83.7	125	227	389	589	801	1004	1020
0	2.40	4.03	6.50	9.33	11.5	14.6	19.9	26.4	35.7	49.6	67.9	91.2	158	299	509	810	1368	1703	1668
10	2.40	3.99	6.38	9.15	11.3	14.2	19.0	25.3	33.6	45.5	61.9	82.4	124	222	382	583	793	988	990
20	2.40	3.91	6.10	8.74	10.8	13.3	17.0	22.6	29.2	37.9	50.2	65.6	83.5	113	172	259	350	413	427
30	2.40	3.78	5.68	8.08	10.1	12.1	14.7	18.7	23.7	29.6	36.6	45.4	56.1	68.8	79.9	89.9	100.0	106	104
40	2.40	3.61	5.13	7.15	9.13	10.8	12.5	14.8	18.0	21.8	26.0	30.5	34.9	39.6	44.6	48.9	52.2	54.3	54.2
50	2.40	3.40	4.50	6.07	7.77	9.27	10.6	11.9	13.4	15.2	17.4	19.8	22.1	24.5	26.6	27.9	28.8	29.1	28.8
60	2.40	3.17	3.94	4.94	6.11	7.35	8.49	9.48	10.4	11.3	12.1	12.9	13.6	14.4	15.0	15.5	15.8	15.9	15.7
70	2.40	2.92	3.42	3.93	4.52	5.24	5.92	6.62	7.30	7.87	8.38	8.84	9.27	9.63	9.92	10.1	10.2	10.3	10.3
80	2.40	2.65	2.88	3.11	3.34	3.55	3.76	3.97	4.18	4.38	4.58	4.74	4.86	4.95	5.01	5.04	5.03	4.99	4.91
90	2.40	2.37	2.35	2.32	2.29	2.26	2.23	2.21	2.18	2.15	2.12	2.09	2.07	2.04	2.01	1.98	1.95	1.93	1.90
100	2.40	2.12	1.86	1.64	1.50	1.43	1.41	1.39	1.38	1.38	1.38	1.38	1.36	1.34	1.32	1.31	1.30	1.30	1.30
110	2.40	1.88	1.49	1.39	1.33	1.31	1.28	1.24	1.17	1.13	1.10	1.10	1.10	1.10	1.10	1.11	1.11	1.12	1.12
120	2.40	1.67	1.38	1.30	1.28	1.22	1.13	1.09	1.10	1.11	1.13	1.15	1.18	1.21	1.24	1.27	1.29	1.31	1.32
130	2.40	1.51	1.31	1.27	1.20	1.10	1.09	1.11	1.14	1.19	1.25	1.33	1.42	1.52	1.62	1.71	1.78	1.84	1.87
140	2.40	1.44	1.29	1.26	1.11	1.09	1.11	1.16	1.24	1.35	1.50	1.68	1.88	2.10	2.31	2.49	2.63	2.73	2.78
150	2.40	1.40	1.27	1.20	1.09	1.10	1.15	1.24	1.38	1.58	1.84	2.15	2.48	2.80	3.07	3.28	3.45	3.57	3.63
160	2.40	1.39	1.27	1.16	1.09	1.12	1.19	1.32	1.52	1.81	2.18	2.60	3.00	3.35	3.65	3.91	4.12	4.27	4.34
170	2.40	1.38	1.27	1.13	1.09	1.13	1.22	1.38	1.63	1.98	2.42	2.89	3.31	3.68	4.02	4.32	4.59	4.85	5.05
180	2.40	1.37	1.27	1.12	1.09	1.13	1.22	1.39	1.65	2.02	2.48	2.96	3.38	3.76	4.10	4.38	4.59	4.81	4.91

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2024-11-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:234.53V I:1.3899A P:320.42W PF:0.9829 Freq:50.04Hz Lamp Flux:56326x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: ×100cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.90	4.90	4.89	4.82	4.62	4.27	3.68	2.94	2.29	1.80	1.45	1.25	1.15	1.11	1.09	1.11	1.25	1.35	
-170	4.86	4.85	4.81	4.72	4.46	4.04	3.43	2.75	2.16	1.72	1.41	1.23	1.15	1.10	1.09	1.12	1.26	1.35	
-160	4.70	4.66	4.53	4.30	3.95	3.45	2.87	2.33	1.89	1.55	1.32	1.19	1.13	1.10	1.09	1.13	1.26	1.35	
-150	3.91	3.82	3.64	3.35	2.97	2.57	2.18	1.85	1.56	1.36	1.22	1.15	1.11	1.09	1.10	1.16	1.27	1.35	
-140	2.53	2.46	2.35	2.18	1.99	1.80	1.60	1.43	1.30	1.21	1.15	1.12	1.10	1.09	1.11	1.20	1.28	1.35	
-130	1.57	1.55	1.51	1.45	1.38	1.31	1.25	1.20	1.16	1.13	1.11	1.10	1.09	1.10	1.16	1.25	1.30	1.35	
-120	1.17	1.17	1.16	1.16	1.15	1.13	1.12	1.11	1.10	1.09	1.09	1.09	1.12	1.17	1.24	1.29	1.31	1.35	
-110	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.10	1.12	1.16	1.21	1.25	1.28	1.31	1.32	1.33	1.35	
-100	1.39	1.38	1.38	1.38	1.39	1.39	1.39	1.38	1.37	1.37	1.37	1.37	1.37	1.37	1.37	1.37	1.36	1.35	
-90	2.16	2.12	2.07	2.02	1.97	1.92	1.88	1.83	1.78	1.73	1.68	1.64	1.59	1.54	1.49	1.45	1.40	1.35	
-80	5.73	5.55	5.35	5.11	4.85	4.58	4.29	3.98	3.67	3.35	3.02	2.69	2.35	2.01	1.74	1.57	1.45	1.35	
-70	11.7	11.4	11.0	10.5	9.98	9.30	8.53	7.68	6.81	5.95	5.15	4.41	3.71	3.05	2.42	1.82	1.49	1.35	
-60	18.4	17.8	17.0	16.1	15.0	14.0	12.9	11.9	10.7	9.52	8.11	6.64	5.27	4.16	3.18	2.29	1.55	1.35	
-50	32.9	31.5	29.7	27.4	24.6	21.6	18.8	16.4	14.3	12.5	10.8	9.13	7.21	5.35	3.93	2.73	1.66	1.35	
-40	62.0	57.5	51.5	44.9	38.6	33.0	28.3	23.7	19.3	15.8	13.2	11.1	8.99	6.68	4.61	3.13	1.83	1.35	
-30	110	97.8	86.0	76.0	62.9	50.4	39.5	31.5	25.6	19.9	15.7	12.7	10.3	7.81	5.26	3.45	1.97	1.35	
-20	395	311	213	131	90.9	71.7	53.9	40.0	30.6	24.0	18.1	14.1	11.2	8.61	5.82	3.68	2.07	1.35	
-10	850	627	423	257	139	88.4	65.6	46.8	34.3	26.4	19.7	15.0	11.7	9.03	6.14	3.81	2.12	1.35	
0	1253	776	492	286	155	93.0	68.3	48.0	34.9	26.7	20.0	15.1	11.8	9.10	6.20	3.82	2.13	1.35	
10	834	620	417	251	134	86.6	64.3	45.5	33.4	26.0	19.4	14.8	11.6	8.97	6.10	3.79	2.12	1.35	
20	379	294	197	122	87.1	68.9	51.0	37.9	29.4	23.3	17.6	13.7	11.0	8.48	5.74	3.65	2.06	1.35	
30	99.7	90.1	80.6	71.1	58.2	45.9	36.4	29.5	24.4	19.0	15.1	12.3	10.0	7.63	5.16	3.41	1.96	1.35	
40	52.6	49.0	44.4	39.3	34.2	30.0	26.3	22.1	18.0	14.9	12.6	10.6	8.69	6.48	4.50	3.07	1.81	1.35	
50	28.4	27.6	26.3	24.6	22.2	19.5	17.1	15.0	13.2	11.7	10.3	8.71	6.89	5.16	3.81	2.68	1.63	1.35	
60	15.6	15.2	14.7	14.0	13.3	12.5	11.7	10.9	9.98	8.87	7.58	6.26	5.01	3.98	3.08	2.23	1.53	1.35	
70	10.1	9.96	9.68	9.32	8.84	8.28	7.63	6.94	6.22	5.48	4.77	4.11	3.51	2.91	2.33	1.76	1.47	1.35	
80	4.84	4.73	4.60	4.44	4.25	4.05	3.83	3.59	3.33	3.06	2.78	2.48	2.19	1.89	1.65	1.51	1.42	1.35	
90	1.87	1.84	1.81	1.78	1.75	1.72	1.68	1.65	1.62	1.59	1.56	1.53	1.50	1.47	1.44	1.41	1.38	1.35	
100	1.29	1.29	1.29	1.29	1.30	1.31	1.33	1.34	1.34	1.34	1.34	1.33	1.33	1.33	1.34	1.34	1.35	1.35	
110	1.12	1.12	1.11	1.11	1.10	1.10	1.10	1.09	1.09	1.10	1.13	1.17	1.23	1.27	1.29	1.30	1.32	1.35	
120	1.31	1.30	1.27	1.24	1.21	1.19	1.16	1.14	1.12	1.10	1.10	1.09	1.10	1.15	1.23	1.28	1.30	1.35	
130	1.85	1.80	1.73	1.64	1.55	1.45	1.35	1.27	1.20	1.16	1.12	1.10	1.09	1.10	1.15	1.24	1.29	1.35	
140	2.76	2.70	2.58	2.41	2.20	1.97	1.74	1.54	1.38	1.26	1.18	1.13	1.10	1.09	1.11	1.20	1.28	1.35	
150	3.67	3.63	3.53	3.34	3.06	2.70	2.32	1.96	1.65	1.42	1.26	1.17	1.12	1.09	1.09	1.16	1.27	1.35	
160	4.39	4.36	4.27	4.12	3.85	3.45	2.94	2.41	1.96	1.60	1.35	1.21	1.14	1.10	1.09	1.13	1.26	1.35	
170	4.95	4.83	4.72	4.60	4.37	4.00	3.43	2.78	2.20	1.74	1.43	1.24	1.15	1.11	1.09	1.12	1.26	1.35	
180	4.90	4.90	4.89	4.82	4.62	4.27	3.68	2.94	2.29	1.80	1.45	1.25	1.15	1.11	1.09	1.11	1.25	1.35	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2024-11-19

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: