

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2399.2 cd per klm.
(Luminaire orientation as tested.)	-3.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	61.8V x 61.0H
	At 50% of Imax	30.2V x 29.7H
	At 90% of Imax	11.6V x 11.2H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	731.2 lumens per klm.
	To 50% of Imax	359.6 lumens per klm.
	To 90% of Imax	55.8 lumens per klm.

Upward LOR	2.4 %
Downward LOR	97.7 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2024-11-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:233.5V I:1.398A P:320.8W PF:0.983 Freq:49.97Hz Lamp Flux:55058.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

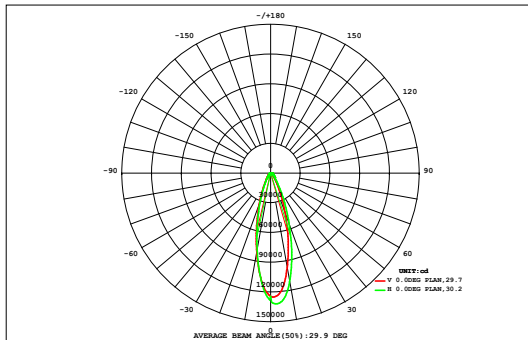


DATA OF LAMP		Eff:171.64lm/W	
MODEL		Imax(cd)	132095
NOMINAL POWER(W)	320	AVAILABILITY(%)	73.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	40213
NOMINAL FLUX(lm)	55058.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	55059
TEST VOLTAGE(V)	220	θ @50% (H,V)	30,30DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	0.69	2.26	3.99	5.76	7.45	8.93	10.1	10.7	10.9	10.6	9.97	8.86	7.41	5.76	4.08	2.57	1.36	0.41	112	0.00		
90	0.69	2.26	3.99	5.76	7.45	8.93	10.1	10.7	10.9	10.6	9.97	8.86	7.41	5.76	4.08	2.57	1.36	0.41	112	0.00		
80	0.84	3.19	6.40	10.3	14.3	18.4	22.0	24.6	25.8	25.6	23.8	20.9	17.0	12.8	8.59	4.90	2.05	0.47	242	0.00		
70	0.97	4.08	8.82	15.0	22.6	30.4	37.0	41.8	44.0	43.9	41.4	36.2	29.1	21.0	13.5	7.43	3.02	0.55	401	0.00		
60	1.09	4.94	11.3	20.6	31.2	41.7	51.6	59.3	63.0	63.1	59.4	51.7	41.5	30.2	19.0	9.98	3.91	0.67	564	0.00		
50	1.19	5.71	14.0	25.6	39.5	56.0	74.2	90.9	99.8	99.6	90.6	74.6	56.5	39.5	24.6	12.5	4.75	0.78	810	0.00		
40	1.29	6.45	16.3	30.2	49.5	77.9	121	174	208	205	168	117	77.8	50.2	29.9	15.0	5.45	0.88	1354	0.00		
30	1.36	7.06	18.1	34.7	61.6	116	227	412	566	545	378	209	111	62.2	34.8	17.0	6.03	0.95	2807	1410		
	1.41	7.50	19.4	38.5	75.2	170	432	1007	1556	1476	877	371	156	74.4	39.0	18.5	6.45	1.00	6326	5449		
	1.44	7.74	20.1	41.0	85.8	219	675	1787	3035	2833	1489	544	193	83.4	41.7	19.4	6.66	1.02	11083	10319		
	1.45	7.79	20.3	41.6	88.3	230	727	1958	3437	3234	1660	596	204	85.9	42.3	19.5	6.71	1.02	12362	11608		
	1.43	7.65	19.9	40.3	81.4	194	535	1325	2251	2172	1195	473	180	80.5	40.8	19.0	6.60	1.01	8624	7811		
	1.38	7.31	18.8	37.1	69.0	140	303	627	984	963	592	285	135	69.6	37.3	17.7	6.28	0.97	4295	3258		
-30	1.32	6.76	17.2	32.8	56.5	95.4	164	264	359	356	258	160	95.3	57.2	32.5	15.9	5.77	0.91	1978	357		
-40	1.23	6.07	15.1	28.0	45.3	68.2	97.2	130	157	156	130	97.6	68.8	45.3	27.0	13.6	5.10	0.82	1093	0.00		
-50	1.13	5.30	12.6	23.0	35.5	50.0	65.4	79.6	89.5	89.5	79.8	65.5	49.7	34.6	21.5	11.3	4.27	0.72	719	0.00		
-60	1.02	4.43	9.97	17.7	26.9	36.4	45.5	53.1	58.1	57.9	52.7	44.7	35.2	25.3	16.1	8.58	3.37	0.60	497	0.00		
-70	0.88	3.55	7.37	12.3	18.0	24.2	29.9	34.5	37.5	37.3	33.8	28.8	22.7	16.5	10.6	5.87	2.41	0.51	327	0.00		
-80	0.73	2.58	4.90	7.50	10.2	12.9	15.4	17.3	18.7	18.4	16.6	14.2	11.4	8.54	5.82	3.48	1.68	0.45	171	0.00		
-90	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)				20	30	40	50	60	70	80	90		
Φ t	20.9	100	244	462	818	1588	3632	8096	13001	12386	7155	3199	1490	803	449	222	81.9	13.7	53763	---		
Φ a	0.00	0.00	0.00	0.00	0.00	43.1	2300	6960	11915	11290	5985	1720	0.00	0.00	0.00	0.00	0.00	0.00	---	40213		

ISOCANDELA DIAGRAM

Test:U:233.5V I:1.398A P:320.8W PF:0.983 Freq:49.97Hz Lamp Flux:55058.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

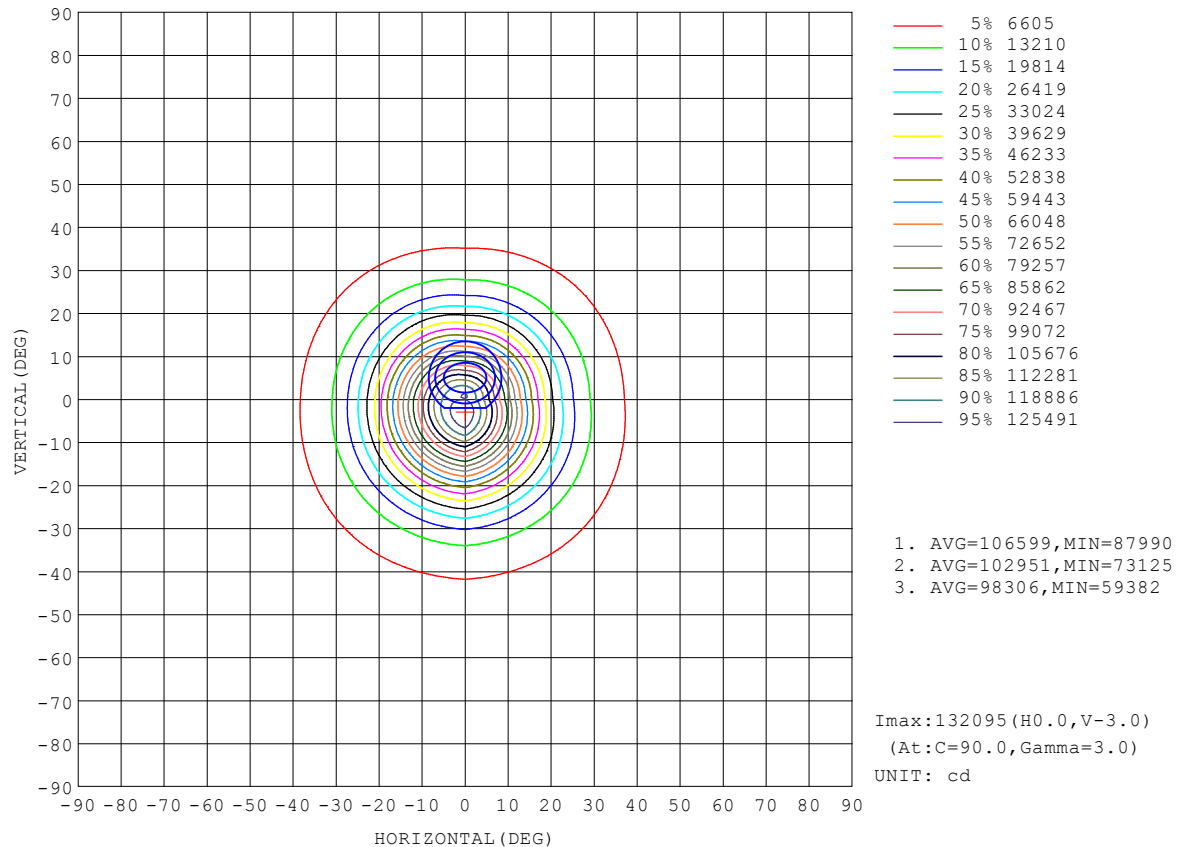


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2024-11-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:233.5V I:1.398A P:320.8W PF:0.983 Freq:49.97Hz Lamp Flux:55058.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

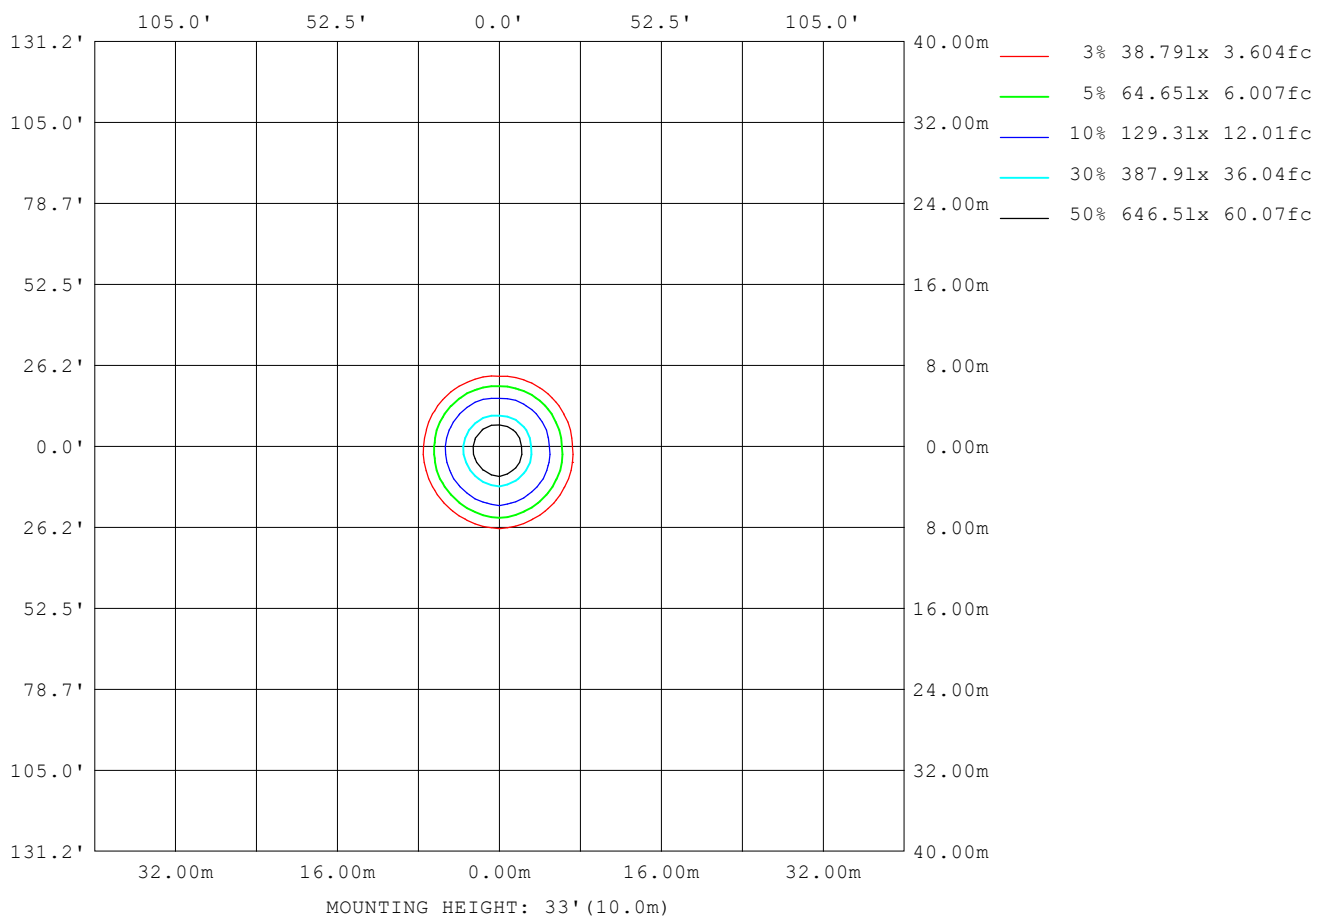

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2024-11-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

Planar Illuminance Curve

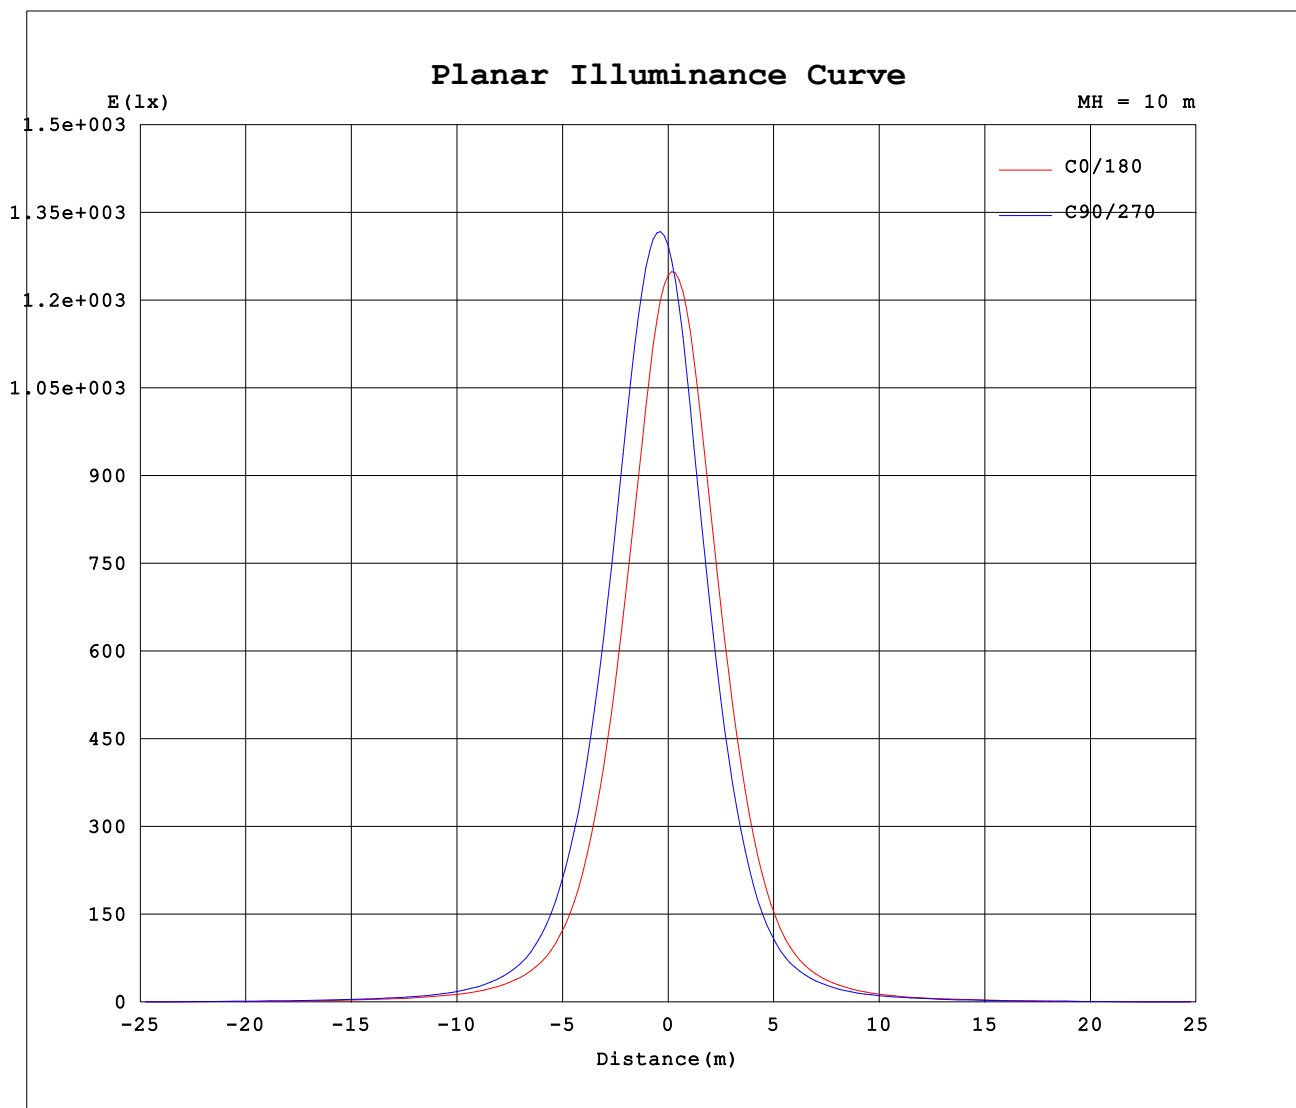


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason
Test Date: 2024-11-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.200m [K=1.0000]
Remarks:

AAI Figure

Test:U:233.5V I:1.398A P:320.8W PF:0.983 Freq:49.97Hz Lamp Flux:55058.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

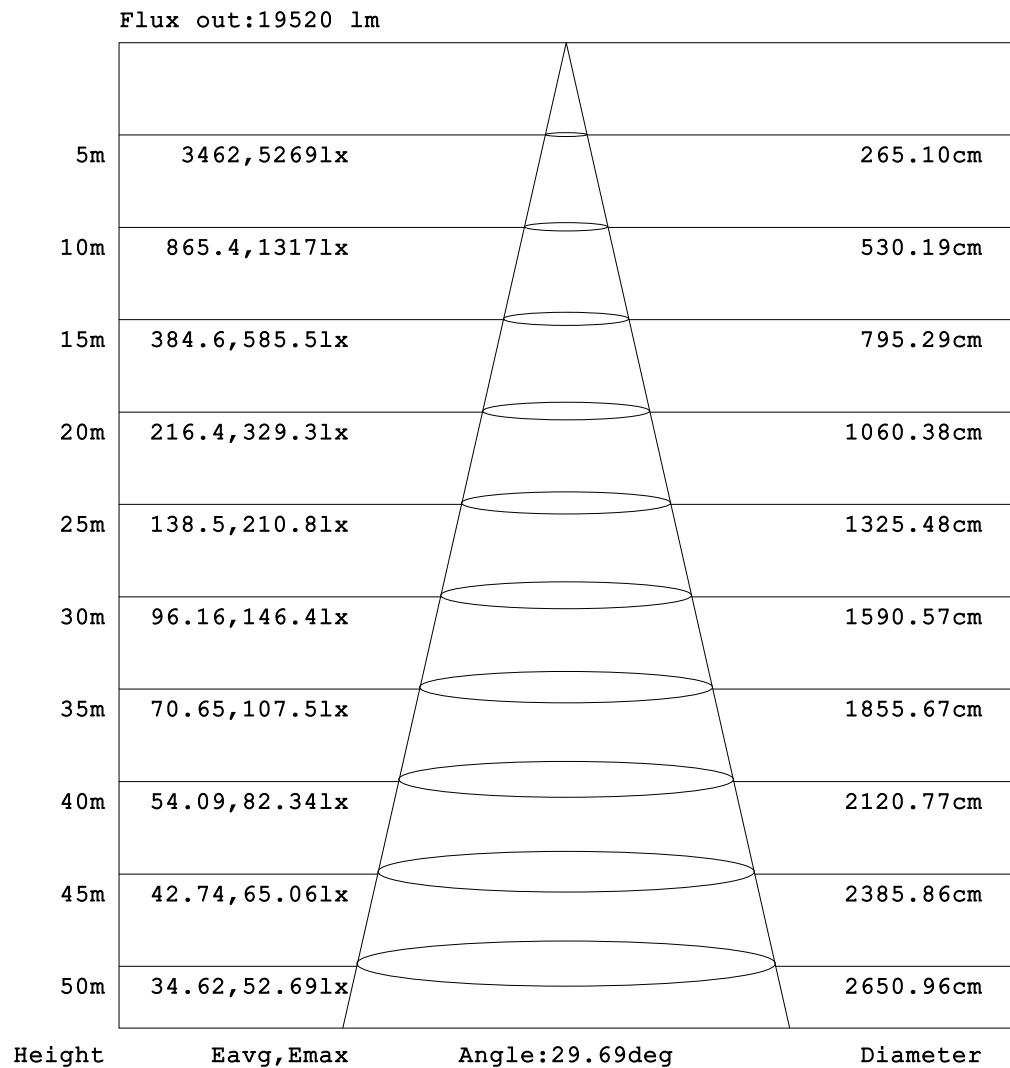

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason
 Test Date:2024-11-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.200m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:233.5V I:1.398A P:320.8W PF:0.983 Freq:49.97Hz Lamp Flux:55058.6x1 lm								
NAME:				TYPE:				WEIGHT:
SPEC.:				DIM.:				SERIAL No.:
MFR.: EVERFINE				SUR.:				Shielding Angle:

Table--1

UNIT: ×100cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.35	1.42	1.39	1.18	1.12	1.18	1.31	1.51	1.79	2.17	2.60	3.04	3.45	3.84	4.19	4.51	4.78	5.00	5.13
-170	2.35	1.43	1.40	1.21	1.12	1.17	1.28	1.46	1.72	2.05	2.45	2.89	3.32	3.73	4.10	4.40	4.62	4.74	4.77
-160	2.35	1.44	1.40	1.28	1.11	1.15	1.24	1.37	1.57	1.83	2.15	2.52	2.91	3.29	3.66	3.96	4.20	4.35	4.42
-150	2.35	1.46	1.40	1.35	1.11	1.13	1.18	1.27	1.40	1.57	1.78	2.02	2.29	2.57	2.84	3.09	3.28	3.41	3.46
-140	2.35	1.49	1.41	1.40	1.20	1.12	1.14	1.18	1.25	1.34	1.44	1.57	1.71	1.85	1.98	2.10	2.18	2.23	2.22
-130	2.35	1.52	1.43	1.43	1.38	1.17	1.12	1.13	1.15	1.19	1.23	1.27	1.32	1.37	1.41	1.45	1.46	1.47	1.45
-120	2.35	1.58	1.47	1.44	1.45	1.41	1.29	1.15	1.12	1.12	1.13	1.14	1.15	1.16	1.17	1.17	1.17	1.17	1.16
-110	2.35	1.70	1.56	1.51	1.48	1.48	1.48	1.47	1.44	1.37	1.28	1.20	1.15	1.13	1.12	1.12	1.12	1.12	1.12
-100	2.35	1.94	1.75	1.67	1.64	1.62	1.61	1.60	1.60	1.60	1.61	1.62	1.62	1.63	1.64	1.65	1.65	1.67	1.68
-90	2.35	2.42	2.50	2.57	2.65	2.72	2.80	2.87	2.95	3.02	3.09	3.17	3.24	3.32	3.39	3.47	3.54	3.62	3.69
-80	2.35	2.89	3.40	3.88	4.34	4.77	5.18	5.57	5.98	6.40	6.84	7.25	7.63	7.98	8.30	8.57	8.81	9.00	9.14
-70	2.35	3.31	4.18	4.98	5.76	6.70	7.63	8.48	9.37	10.4	11.4	12.3	13.0	13.7	14.2	14.7	15.2	15.5	15.8
-60	2.35	3.69	4.86	6.02	7.37	8.59	10.2	11.7	13.0	14.4	15.8	17.1	18.4	19.6	20.8	21.8	22.7	23.4	23.9
-50	2.35	4.01	5.43	7.11	8.66	10.7	12.6	14.5	16.5	18.5	20.8	23.3	25.8	28.4	31.0	33.4	35.6	37.2	38.3
-40	2.35	4.27	6.00	7.89	10.1	12.4	14.8	17.2	20.1	23.4	27.2	31.6	37.1	43.7	51.6	59.8	67.5	73.6	76.8
-30	2.35	4.48	6.50	8.53	11.2	13.9	16.6	19.8	23.8	28.6	35.2	45.0	59.1	78.0	102	131	163	189	203
-20	2.35	4.63	6.84	9.14	12.0	14.9	18.0	22.0	27.0	34.1	45.8	64.9	94.1	142	217	315	419	507	553
-10	2.35	4.72	7.01	9.49	12.4	15.5	18.9	23.3	29.0	38.5	55.2	83.1	134	228	378	579	807	1006	1114
0	2.35	4.74	7.04	9.54	12.5	15.5	19.0	23.4	29.3	39.6	57.5	87.8	146	258	438	688	969	1199	1243
10	2.35	4.69	6.95	9.36	12.3	15.2	18.5	22.6	27.9	36.5	51.3	75.8	118	196	320	480	651	775	790
20	2.35	4.58	6.71	8.89	11.7	14.5	17.3	20.8	25.1	31.0	40.3	55.0	76.9	109	157	217	276	314	314
30	2.35	4.40	6.33	8.19	10.7	13.3	15.7	18.4	21.6	25.3	30.2	37.0	46.2	57.9	71.7	85.9	98.1	105	104
40	2.35	4.17	5.80	7.49	9.49	11.6	13.9	15.8	18.0	20.4	23.0	26.0	29.3	32.9	36.7	40.3	42.9	44.2	43.9
50	2.35	3.89	5.20	6.68	7.98	9.76	11.5	13.3	14.8	16.2	17.8	19.3	20.7	22.1	23.3	24.3	25.0	25.4	25.3
60	2.35	3.56	4.60	5.61	6.72	7.66	8.88	10.1	11.4	12.7	13.7	14.5	15.2	15.8	16.4	16.8	17.1	17.2	17.2
70	2.35	3.18	3.89	4.57	5.19	5.91	6.57	7.12	7.71	8.39	9.04	9.62	10.1	10.6	11.0	11.4	11.7	11.9	11.9
80	2.35	2.78	3.12	3.43	3.72	4.00	4.30	4.56	4.80	5.02	5.25	5.45	5.61	5.73	5.80	5.84	5.84	5.82	5.76
90	2.35	2.32	2.30	2.28	2.25	2.23	2.21	2.19	2.16	2.14	2.12	2.09	2.07	2.05	2.02	2.00	1.98	1.95	1.93
100	2.35	1.87	1.65	1.57	1.54	1.52	1.51	1.50	1.51	1.52	1.52	1.52	1.51	1.51	1.49	1.48	1.47	1.46	1.46
110	2.35	1.65	1.51	1.46	1.44	1.44	1.42	1.34	1.26	1.20	1.14	1.12	1.13	1.13	1.14	1.15	1.16	1.17	1.17
120	2.35	1.55	1.44	1.42	1.41	1.31	1.20	1.12	1.13	1.15	1.18	1.22	1.26	1.30	1.34	1.38	1.42	1.44	1.46
130	2.35	1.50	1.41	1.40	1.31	1.13	1.12	1.16	1.21	1.27	1.36	1.46	1.57	1.69	1.80	1.90	1.99	2.05	2.08
140	2.35	1.47	1.39	1.36	1.16	1.12	1.16	1.23	1.34	1.48	1.65	1.85	2.06	2.28	2.48	2.65	2.78	2.88	2.93
150	2.35	1.45	1.39	1.32	1.11	1.14	1.21	1.33	1.50	1.73	2.01	2.31	2.62	2.92	3.17	3.39	3.56	3.67	3.72
160	2.35	1.43	1.39	1.26	1.12	1.17	1.27	1.43	1.67	1.97	2.34	2.72	3.09	3.44	3.74	3.99	4.18	4.30	4.35
170	2.35	1.42	1.39	1.20	1.12	1.18	1.30	1.50	1.77	2.13	2.55	2.98	3.39	3.76	4.09	4.37	4.59	4.72	4.76
180	2.35	1.42	1.39	1.18	1.12	1.18	1.31	1.51	1.79	2.17	2.60	3.04	3.45	3.84	4.19	4.51	4.78	5.00	5.11

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2024-11-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:233.5V I:1.398A P:320.8W PF:0.983 Freq:49.97Hz Lamp Flux:55058.6x1 lm																		
NAME:									TYPE:					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:				
MFR.: EVERFINE									SUR.:					Shielding Angle:				

Table--2

UNIT: ×100cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.12	5.06	4.94	4.76	4.47	4.00	3.39	2.75	2.17	1.73	1.42	1.24	1.15	1.12	1.12	1.21	1.33	1.49	
-170	4.83	4.82	4.73	4.54	4.22	3.73	3.14	2.55	2.04	1.65	1.38	1.23	1.15	1.12	1.13	1.23	1.34	1.49	
-160	4.44	4.38	4.23	3.97	3.59	3.13	2.63	2.17	1.79	1.50	1.31	1.19	1.13	1.12	1.15	1.25	1.35	1.49	
-150	3.47	3.39	3.22	2.97	2.67	2.35	2.03	1.74	1.51	1.34	1.22	1.15	1.12	1.12	1.18	1.28	1.37	1.49	
-140	2.24	2.20	2.12	1.99	1.84	1.68	1.53	1.39	1.29	1.21	1.15	1.12	1.12	1.16	1.22	1.31	1.39	1.49	
-130	1.46	1.45	1.43	1.39	1.34	1.29	1.24	1.20	1.16	1.13	1.12	1.12	1.16	1.22	1.29	1.34	1.41	1.49	
-120	1.17	1.17	1.16	1.15	1.15	1.14	1.13	1.12	1.12	1.12	1.15	1.22	1.26	1.31	1.35	1.39	1.45	1.49	
-110	1.12	1.12	1.12	1.12	1.13	1.15	1.20	1.26	1.29	1.33	1.34	1.37	1.39	1.41	1.43	1.46	1.49	1.49	
-100	1.66	1.64	1.62	1.60	1.59	1.58	1.57	1.56	1.56	1.55	1.55	1.55	1.55	1.55	1.56	1.56	1.55	1.49	
-90	3.57	3.45	3.32	3.20	3.08	2.96	2.83	2.71	2.59	2.47	2.35	2.22	2.10	1.98	1.86	1.73	1.61	1.49	
-80	8.91	8.63	8.30	7.93	7.52	7.09	6.63	6.14	5.63	5.11	4.59	4.06	3.48	2.93	2.44	2.04	1.68	1.49	
-70	15.4	15.0	14.5	13.9	13.2	12.5	11.7	10.7	9.72	8.70	7.64	6.53	5.53	4.56	3.58	2.56	1.87	1.49	
-60	23.4	22.7	21.8	20.7	19.5	18.2	16.8	15.3	13.8	12.2	10.7	9.18	7.69	6.09	4.70	3.35	2.06	1.49	
-50	37.3	35.7	33.6	31.2	28.6	26.0	23.3	20.8	18.4	16.0	13.8	11.6	9.54	7.69	5.71	4.02	2.27	1.49	
-40	73.2	66.9	59.1	51.1	43.6	37.3	32.0	27.5	23.5	20.0	16.9	14.0	11.3	8.87	6.72	4.57	2.53	1.49	
-30	187	159	126	98.1	75.1	57.3	44.4	35.5	29.1	24.0	19.8	16.2	12.9	9.93	7.47	4.98	2.77	1.49	
-20	493	395	291	199	131	87.9	61.5	44.6	34.4	27.5	22.2	17.9	14.1	10.7	7.89	5.28	2.95	1.49	
-10	960	735	506	321	195	117	76.1	52.1	38.1	29.6	23.6	18.8	14.8	11.2	8.10	5.45	3.05	1.49	
0	1085	814	550	342	202	120	77.5	53.1	38.5	29.9	23.8	18.9	14.9	11.2	8.07	5.45	3.07	1.49	
10	730	579	407	263	163	102	68.8	48.2	36.1	28.5	22.9	18.4	14.5	11.0	7.97	5.38	3.03	1.49	
20	299	253	193	138	97.9	70.7	51.7	39.1	31.3	25.6	21.0	17.1	13.6	10.4	7.65	5.16	2.90	1.49	
30	102	93.8	81.4	67.9	55.1	44.3	36.3	30.5	25.8	21.8	18.4	15.3	12.3	9.41	7.13	4.81	2.69	1.49	
40	43.9	42.3	39.6	36.2	32.8	29.5	26.3	23.4	20.6	18.0	15.5	13.1	10.5	8.22	6.32	4.36	2.43	1.49	
50	25.4	25.1	24.5	23.5	22.3	20.8	19.3	17.7	16.1	14.3	12.5	10.5	8.56	7.01	5.28	3.80	2.15	1.49	
60	17.2	17.1	16.8	16.4	15.7	15.0	14.2	13.2	12.0	10.5	9.14	7.90	6.76	5.44	4.29	3.09	1.93	1.49	
70	11.8	11.5	11.2	10.7	10.2	9.61	8.99	8.35	7.70	7.04	6.28	5.48	4.74	3.99	3.17	2.26	1.74	1.49	
80	5.73	5.66	5.57	5.43	5.27	5.06	4.83	4.56	4.26	3.94	3.58	3.18	2.71	2.30	1.99	1.76	1.56	1.49	
90	1.90	1.88	1.86	1.83	1.81	1.78	1.76	1.73	1.71	1.68	1.66	1.64	1.61	1.59	1.56	1.54	1.51	1.49	
100	1.45	1.45	1.45	1.46	1.47	1.47	1.47	1.48	1.48	1.46	1.45	1.44	1.45	1.45	1.45	1.46	1.48	1.49	
110	1.17	1.16	1.15	1.14	1.14	1.13	1.12	1.12	1.12	1.15	1.22	1.30	1.35	1.37	1.38	1.41	1.44	1.49	
120	1.44	1.41	1.37	1.33	1.29	1.24	1.21	1.17	1.15	1.13	1.12	1.12	1.16	1.27	1.33	1.36	1.42	1.49	
130	2.04	1.97	1.88	1.78	1.66	1.54	1.43	1.33	1.25	1.19	1.15	1.12	1.12	1.15	1.26	1.33	1.39	1.49	
140	2.89	2.80	2.67	2.49	2.27	2.04	1.81	1.60	1.43	1.30	1.20	1.15	1.12	1.12	1.18	1.30	1.37	1.49	
150	3.73	3.66	3.52	3.31	3.02	2.68	2.32	1.97	1.67	1.44	1.28	1.18	1.13	1.12	1.14	1.27	1.36	1.49	
160	4.39	4.36	4.25	4.05	3.73	3.31	2.84	2.36	1.93	1.60	1.36	1.22	1.15	1.12	1.13	1.24	1.34	1.49	
170	4.82	4.80	4.70	4.53	4.24	3.79	3.23	2.65	2.12	1.71	1.42	1.24	1.15	1.12	1.12	1.22	1.33	1.49	
180	5.12	5.06	4.94	4.76	4.47	4.00	3.39	2.75	2.17	1.73	1.42	1.24	1.15	1.12	1.12	1.21	1.33	1.49	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2024-11-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	124281	129317	124281	129317
3.0	117169	132095	123992	119430
6.0	103398	127638	116662	103338
9.0	86919	116409	102381	84926
12.0	70417	100150	85554	67423
15.0	55010	82611	68842	51774
18.0	41709	65642	53151	38637
21.0	30908	50525	39574	28163
24.0	22475	38266	28871	20102
27.0	16422	28179	20532	14348
30.0	12026	20348	14594	10441
33.0	9125	14654	10623	7918
36.0	7165	10893	8023	6108
39.0	5710	8350	6233	4742
42.0	4612	6505	4914	3828
45.0	3852	5191	3958	3200
48.0	3291	4276	3262	2763
51.0	2854	3627	2788	2420
54.0	2494	3130	2436	2136
57.0	2174	2725	2151	1900
60.0	1894	2386	1897	1716
63.0	1650	2100	1673	1544
66.0	1408	1859	1492	1406
69.0	1189	1642	1308	1262
72.0	987.0	1460	1130	1022
75.0	807.1	1282	954.2	838.9
78.0	664.5	1048	783.5	670.7
81.0	494.8	848.7	658.0	536.3
84.0	357.4	658.1	513.4	397.3
87.0	204.3	523.1	386.6	240.2
90.0	148.9	369.2	234.8	192.9
93.0	138.3	223.0	150.4	173.1
96.0	130.1	190.7	139.2	166.2
99.0	124.0	172.8	138.5	156.0
102.0	115.9	160.5	136.0	118.1
105.0	112.3	140.5	118.2	112.0
108.0	111.5	113.5	110.9	114.4
111.0	112.0	111.3	113.0	118.6
114.0	114.1	111.5	116.7	124.8
117.0	118.0	113.0	122.7	133.7
120.0	124.4	116.2	130.8	145.6
123.0	133.8	121.3	141.8	160.6
126.0	147.3	129.1	155.9	179.0
129.0	165.5	140.5	172.9	200.4
132.0	188.9	156.1	193.4	224.2
135.0	217.1	176.4	216.6	249.8
138.0	250.4	202.1	241.9	275.7
141.0	287.1	232.9	268.4	301.2
144.0	326.1	268.4	295.0	325.9
147.0	365.8	307.1	320.5	349.4
150.0	400.1	345.7	345.3	372.5
153.0	431.0	381.7	368.8	393.8
156.0	453.6	412.4	391.0	413.6
159.0	470.8	436.0	412.4	430.4
162.0	484.1	452.6	432.6	444.7
165.0	494.2	464.1	451.5	458.8
168.0	501.7	472.5	467.8	470.3
171.0	507.6	479.0	482.5	478.2
174.0	511.2	486.8	495.3	484.0
177.0	512.8	492.7	505.9	490.7
180.0	511.0	494.8	512.9	493.2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason
Test Date:2024-11-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.200m [K=1.0000]
Remarks: